



## GaAs MMIC DOUBLE BALANCED MIXER MODULE, 23 - 37 GHz

### Features


- Wide IF Bandwidth: DC - 13 GHz
- Passive: No DC Bias Required
- Input IP3: +19 dBm
- LO/RF Isolation: 35 dB
- Hermetically Sealed Module
- Field Replaceable Coaxial Connectors
- 55 to +85 °C Operating Temperature

### Typical Applications

The HMC-C035 is ideal for:

- Telecom Infrastructure
- Military Radio, Radar & ECM
- Space Systems
- Test Instrumentation

### Functional Diagram

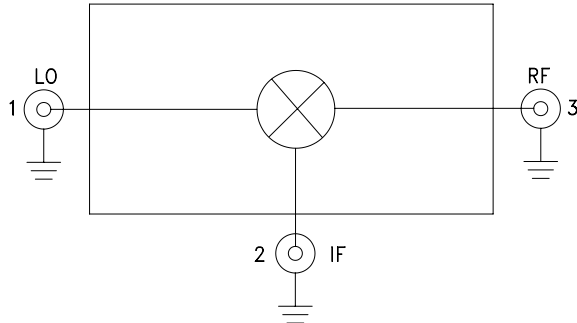

### General Description

The HMC-C035 is a general purpose double-balanced mixer housed in a miniature hermetic module which can be used as an upconverter or downconverter between 23 and 37 GHz. This mixer requires no external components or matching circuitry. The HMC-C035 provides excellent, LO to RF, and LO to IF suppression due to optimized balun structures. The mixer operates with LO drive levels from +11 to +15 dBm and requires no DC bias. The HMC-C035 may also be used as a Bi-Phase Modulator/Demodulator or phase comparator. The module features removable coaxial connectors which can be detached to allow direct connection of the I/O pins to a microstrip or coplanar circuit.

### Electrical Specifications, $T_A = +25^\circ\text{C}$ , $IF = 1\text{ GHz}$ , $LO = +13\text{ dBm}^*$


Parameter	Min.	Typ.	Max.	Units
Frequency Range, RF & LO	23 - 37			GHz
Frequency Range, IF	DC - 13			GHz
Conversion Loss		9	12	dB
Noise Figure (SSB)		9	12	dB
LO to RF Isolation	20	35		dB
LO to IF Isolation	20	35		dB
RF to IF Isolation	13	25		dB
IP3 (Input)		19		dBm
IP2 (Input)		50		dBm
1 dB Gain Compression (Input)		12		dBm

\*Unless otherwise noted, all measurements performed as downconverter,  $IF = 1\text{ GHz}$ .




**GaAs MMIC DOUBLE BALANCED  
MIXER MODULE, 23 - 37 GHz**


**Conversion Gain vs. Temperature**

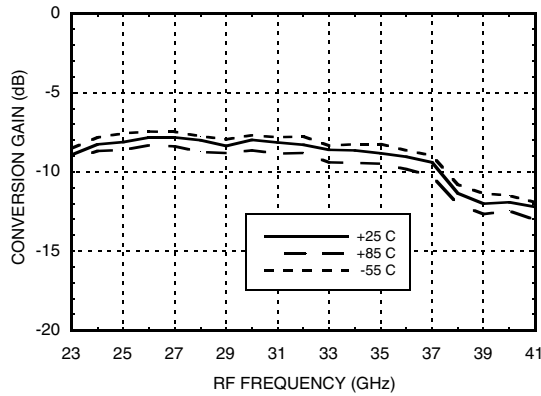


**Isolation**

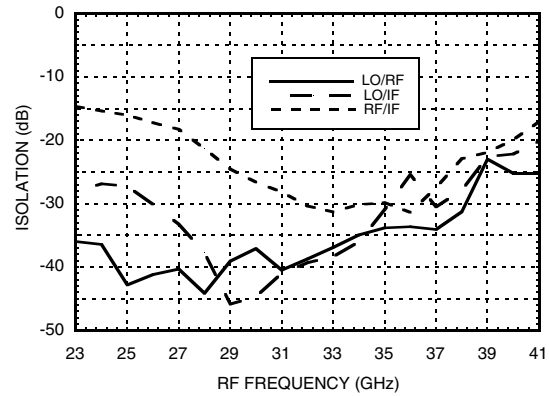


**Conversion Gain vs. LO Drive**

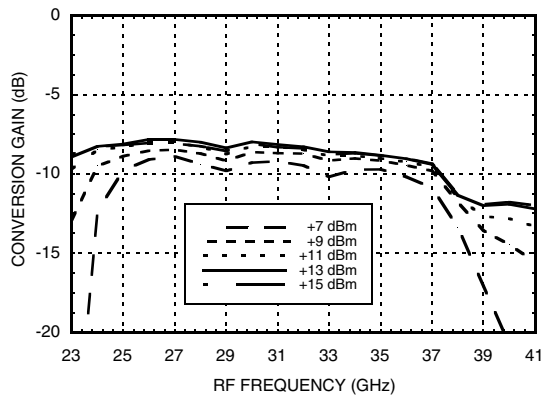


**Return Loss**

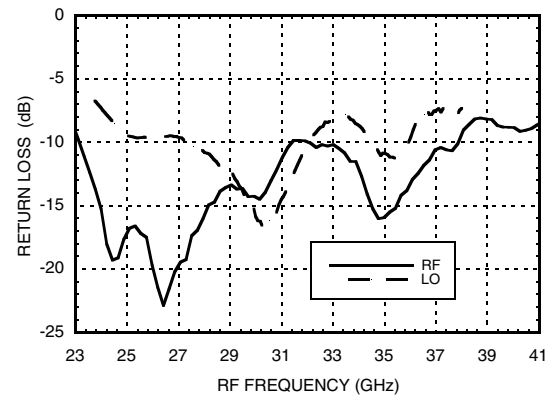

**IF Bandwidth Downconversion with Low Side LO = 24 GHz @ +13 dBm**

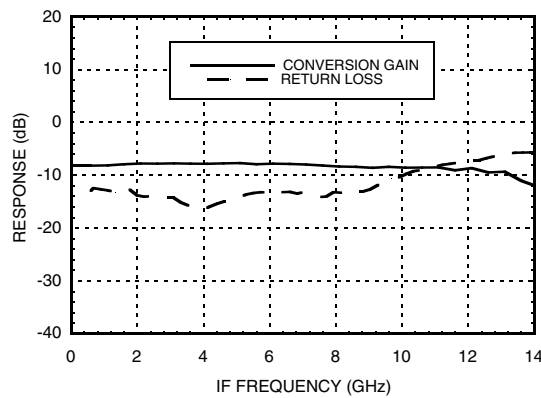

**Upconverter Performance, Conversion Gain vs. LO Drive for Fixed 1 GHz IF Input and Low Side LO**

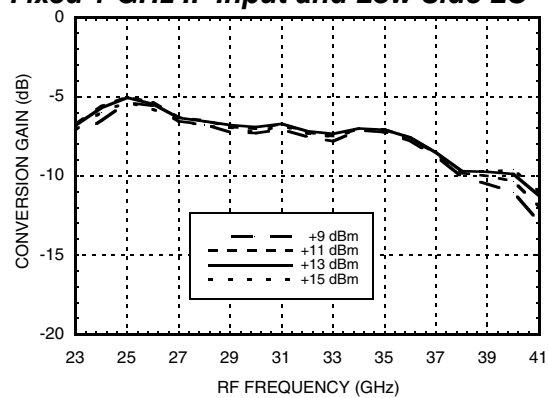


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D




**GaAs MMIC DOUBLE BALANCED  
MIXER MODULE, 23 - 37 GHz**


**Input IP3 vs. LO Drive \***

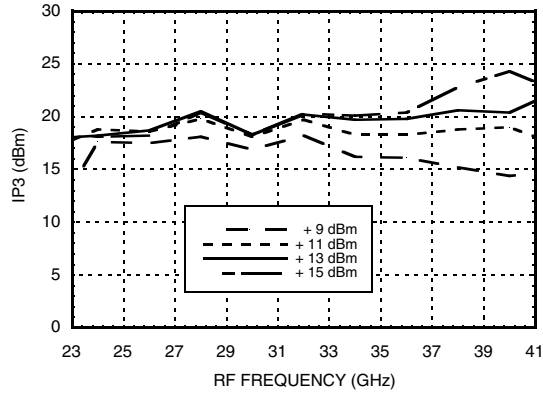


**Input IP3 vs. Temperature\***

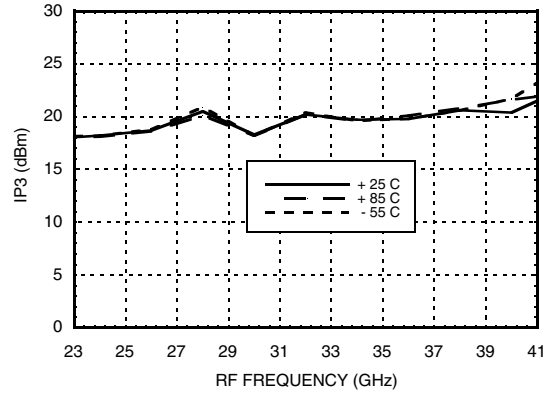


**Input IP2 vs. LO Drive \***

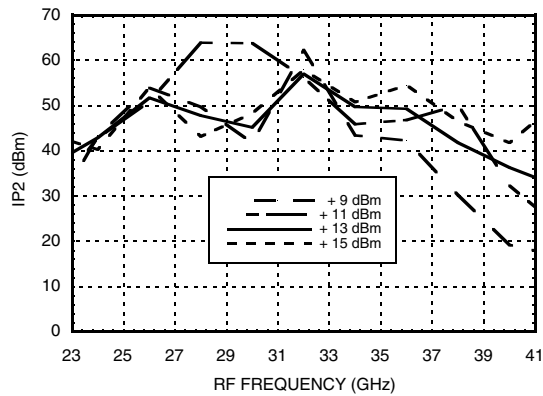

**Input IP2 vs. Temperature \***

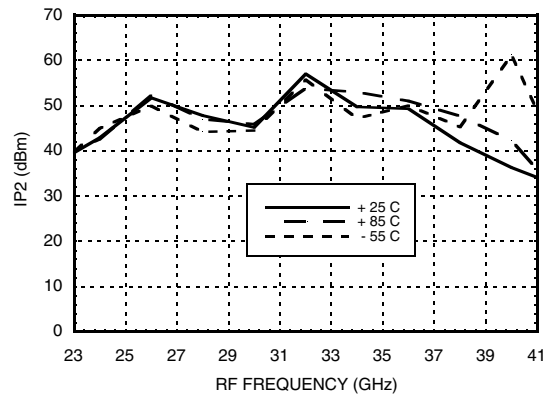

**Input P1dB vs. Temperature**

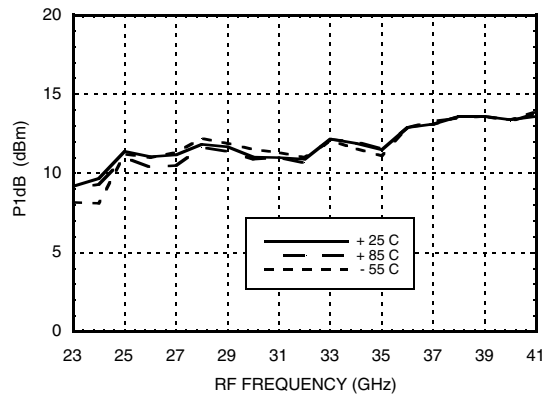

\* Two-tone input power = -10 dBm each tone, 1 MHz spacing.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D


**GaAs MMIC DOUBLE BALANCED  
MIXER MODULE, 23 - 37 GHz**
**MxN Spurious Outputs**

mRF	nLO				
	0	1	2	3	4
0	xx	0	13	xx	xx
1	8	0	29	xx	xx
2	69	53	50	64	xx
3	xx	78	80	67	86
4	xx	xx	87	92	94

RF = 24 GHz @ -10 dBm  
 LO = 25 GHz @ +13 dBm  
 All values in dBc below the IF output power level (-1 RF + 1 LO).

**Absolute Maximum Ratings**

RF / IF Input	+25 dBm
LO Drive	+23 dBm
IF DC Current	±2 mA
Storage Temperature	-65 to +150 °C
Operating Temperature	-55 to +85 °C




**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**



**GaAs MMIC DOUBLE BALANCED MIXER MODULE, 23 - 37 GHz**

**Outline Drawing**

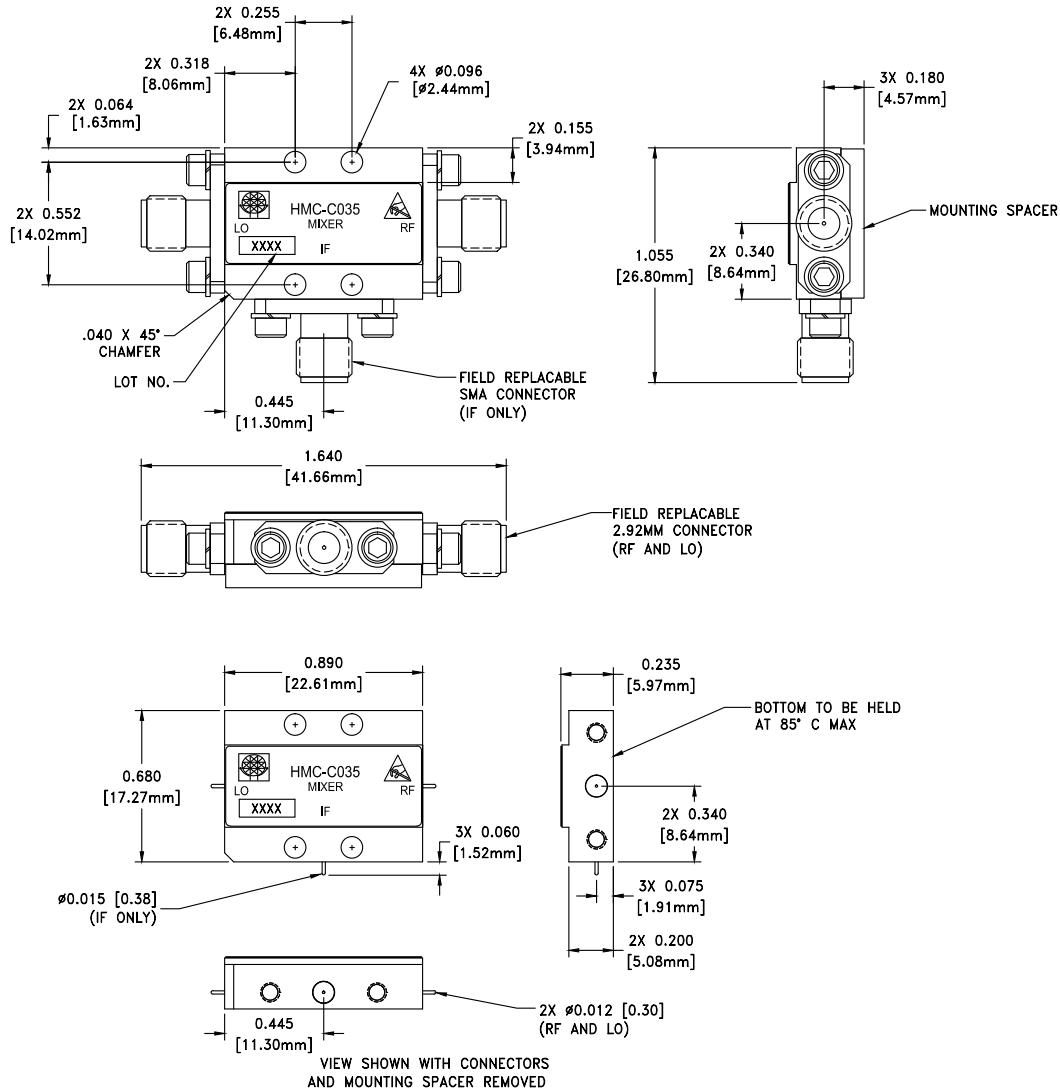

**Package Information**

Package Type	C-11
Package Weight [1]	18.2 gms [2]
Spacer Weight	2.6 gms [2]

[1] Includes the connectors

[2]  $\pm 1$  gms Tolerance



**NOTES:**

1. PACKAGE, LEADS, COVER MATERIAL: KOVAR™
2. PLATING: GOLD PLATE OVER NICKEL PLATE.
3. MOUNTING SPACER: NICKEL PLATED ALUMINUM.
4. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
5. TOLERANCES:  $\pm 0.010$  [0.23] UNLESS OTHERWISE SPECIFIED
6. FIELD REPLACEABLE 2.92mm CONNECTORS. TENSOLITE 231CCSF OR EQUIVALENT.

## GaAs MMIC DOUBLE BALANCED MIXER MODULE, 23 - 37 GHz



### Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1	LO	This pin is DC coupled and matched to 50 Ohms.	
2	IF	This pin is DC coupled. For applications not requiring operation to DC, this port should be DC blocked externally using a series capacitor whose value has been chosen to pass the necessary IF frequency range. For operation to DC, this pin must not source or sink more than 2 mA of current or part non-function and possible part failure will result.	
3	RF	This pin is DC coupled and matched to 50 Ohms.	