


# T1/CEPT/ISDN-PRI TRANSFORMERS

## Dual Surface Mount, 1500 Vrms, Small Package



- RoHS peak reflow temperature rating 245°C
- Single port T1/E1 solution
- Configurable for TP and Coax cable termination
- Transfer-molded, IC-grade packaging
- UL1950 approved to basic isolation

### Electrical Specifications @ 25°C






RoHS-6 Compliant Part Number	Turns Ratio <sup>1</sup> (Pri:Sec ± 2%)	OCL (mH MIN)	L (μH MAX)	Cw/w (pF MAX)	DCR Pri (W MAX)	DCR Sec (W MAX)	Package/ Schematic	Primary Pins
T1021NL	2CT : 1/1.26 & 2CT : 1/1.26	1.5 & 1.5	0.50 & 0.50	40 & 40	0.70 & 0.70	1.00 & 1.00	BH/1	1-3, 11-9
T1075NL	2CS : 1.57/2 & 2CS : 1.57/2	1.5 & 1.5	0.50 & 0.50	40 & 40	0.70 & 0.70	1.00 & 1.00	BH/2	1-2, 5-6

NOTE: Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (such as T1021NLT)

### Mechanical

### Schematics

BH

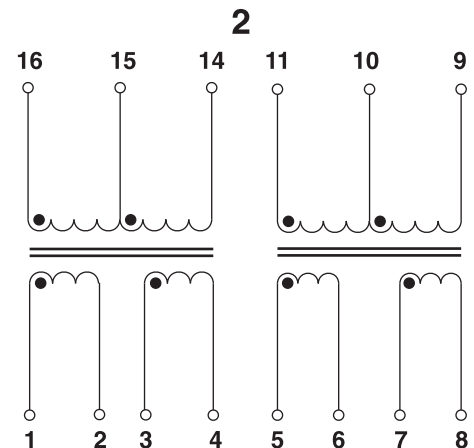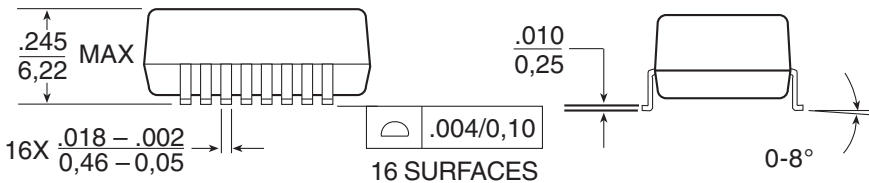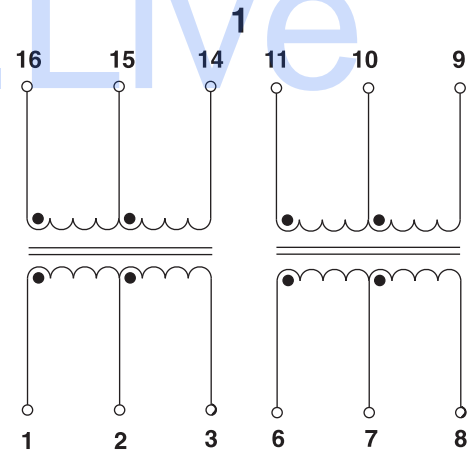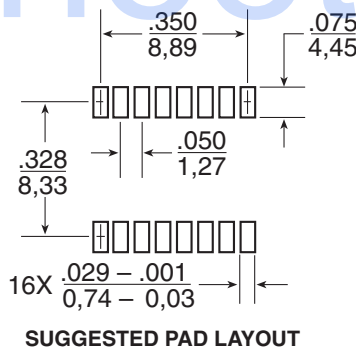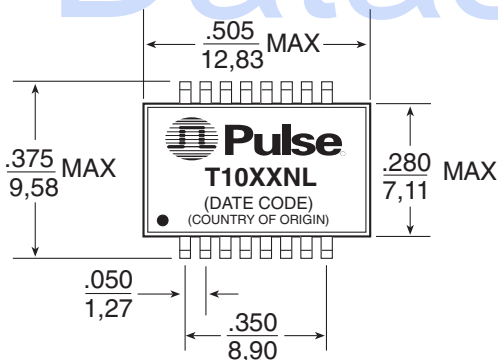

Weight ..... 1.0 grams  
 Tape & Reel ..... 600/reel  
 Tube ..... .40/tube

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0.25}$

# T1/CEPT/ISDN-PRI TRANSFORMERS


## Dual Surface Mount, 1500 Vrms, Small Package



IC Mfr.	IC Part Number	Comments	Standard Temp. TX / RX
Brooktree	UGA 510-1 R8069, R8069A, R8069B	—	T1021NL
VLS	VP14Q575 VP14Q575	E1 75 E1 120	T1021NL
Siemens	PEB 2235, PEB 2235A1, PEB 2235B1 PEB 2235, PEB 2235A1, PEB 2235B1 PEB 2235, PEB 2235A1, PEB 2235B1	T1 CEPT 75 CEPT 120	T1075NL

**1. Turns Ratio** – The turns ratio of these devices have been designed, in conjunction with semiconductor vendor recommendations, to allow connections to various terminations (e.g. 75 or 120 Ω with the same transformer). For example T1075NL can be used with the Siemens PEB 2235 to achieve connection to the 75 or 120 Ω cable. For 75 Ω termination, the PEB 2235 requires the following turns ratio: 1:1.57 (Tx) and 1:1.26 (Rx) which can be achieved using pins (1-2):(15-16) for Tx and (10-11):(5-8) for Rx. Similarly, for 120 Ω, the following turns ratio are required: 1:2 (Tx) and 1:1 (Rx), which are pins (1-2):(16-14) for Tx and (5-8):(11-9) for Rx on the T1075NL.

**2. Return Loss** – ITU-T G.703 and European national regulatory documents specify minimum return loss levels. The transformers will allow these limits to be complied within the situations where they are applicable.

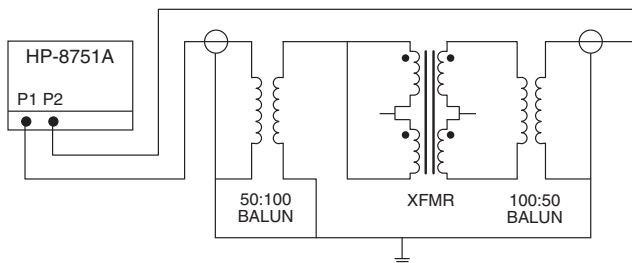

3. Frequency	50-100 KHz	100 KHz-2 MHz	2-3 MHz
<b>Return Loss</b>			
Transmit	9 dB	15 dB	11 dB
Receive	12 dB	18 dB	14 dB

**4. Surge Voltage Capability** – All transformers and chokes meet surge voltage tests according to the most stringent regulatory documents:


**Metallic Voltage:** 800 V peak, 10/560 μsec  
**Longitudinal Voltage:** 2,400 V peak, 10/700 μsec

**5. Flammability** – Materials used in the products are recognized as UL94-VO approved. Products meet the requirements of IEC 695-2-2 (Needle Flame Test).

**6. Safety Agency Recognition** – These parts are recognized to meet Underwriter Laboratories, UL 1950 to basic, per file E133523 (S).

**7. Common Mode Re** dB at 1 MHz. A typical test circuit is shown below.

**8. Crosstalk Attenuation** – In the dual packages, which contain transmit and receive transformers side by side, sufficient crosstalk attenuation is achieved by the inherent characteristics of the toroid cores as well as by their proper positioning. The crosstalk attenuation is typically 50 dB or better from 100 KHz to 10 MHz. This result was established with the test circuit shown below.

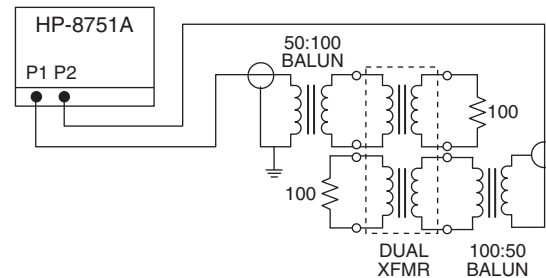

## High Frequency Common Mode Chokes for Telecom Applications (4-Lines)

### Electrical Specifications @ 25°C – Operating Temperature 0°C to 70°C

Pulse Part Number	Turns Ratio (±5%)	OCL (μH MIN)	C <sub>w/w</sub> (pFH MAX)	L <sub>L</sub> (μH MAX)	DCR (Ω MAX)	Isolation (Vrms MIN)	Package
PE-6554NL	1 : 1 : 1 : 1	24.0	15	0.20	0.30	500	Through Hole
PE-6555NL	1 : 1 : 1 : 1	8.0	10	0.20	0.25	500	Through Hole
PE-6584NL	1 : 1 : 1 : 1	47.0	16	0.20	0.30	500	Surface Mount
PE-6585NL	1 : 1 : 1 : 1	24.0	15	0.23	0.30	500	Surface Mount

**NOTE:** Additional common mode chokes to improve EMI performance are available. See data sheet **G002** for mechanicals and schematics of common mode chokes.

## For More Information:

**Pulse Worldwide Headquarters**  
 12220 World Trade Dr.  
 San Diego, CA 92128  
 U.S.A.

**Pulse Europe**  
 Einsteinstrasse 1  
 D-71083 Herrenberg  
 Germany

**Pulse China Headquarters**  
 B402, Shenzhen Academy of  
 Aerospace Technology Bldg.  
 10th Kejinan Rd.  
 High-Tech Zone  
 Nanshan District  
 Shenzhen, PR China 518057  
 Tel: 86 755 33966678  
 Fax: 86 755 33966700

**Pulse North China**  
 Room 2704/2705  
 Super Ocean Finance Ctr.  
 2067 Yan An Rd. West  
 Shanghai 200336  
 China  
 Tel: 86 21 62787060  
 Fax: 86 2162786973

**Pulse South Asia**  
 135 Joo Seng Rd.  
 #03-02  
 PM Industrial Bldg.  
 Singapore 368363  
 Tel: 65 6287 8998  
 Fax: 65 6287 8998

**Pulse North Asia**  
 3F, No. 198  
 Zhongyuan Rd.  
 Zhongli City  
 Taoyuan County 320  
 Taiwan R. O. C.  
 Tel: 886 3 4356768  
 Fax: FRE 886 3 43568 20  
 Pulse: 886 3 4356823

**www.pulseeng.com**  
 Tel: 858 674 8100  
 Fax: 858 674 8262

Tel: 49 7032 7806 0  
 Fax: 49 7032 7806 135

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2009. Pulse Engineering, Inc. All rights reserved.