

SPECIFICATIONS:

MATERIALS:


HOUSING: PBT, UL94 V-0, BLACK
 CONTACTS: GOLD PLATED BRASS (SEE P/N KEY BELOW)
 NUT & WASHER: (SEE P/N KEY BELOW)
 SHELL: (SEE P/N KEY BELOW)
 ORING: EPDM, BLACK

ELECTRICAL:

RATED CURRENT: 3A
 RATED VOLTAGE: 60V
 INSULATION RESISTANCE: 100 MOhms MIN.
 CONTACT RESISTANCE: 10 mOhms MAX.

ENVIRONMENT:

OPERATING TEMPERATURE: -40°C TO +85°C
 WATER PROOF: IP67
 MAX WIRE AWG: 24
 MAX TORQUE: 1.25 in-lbs


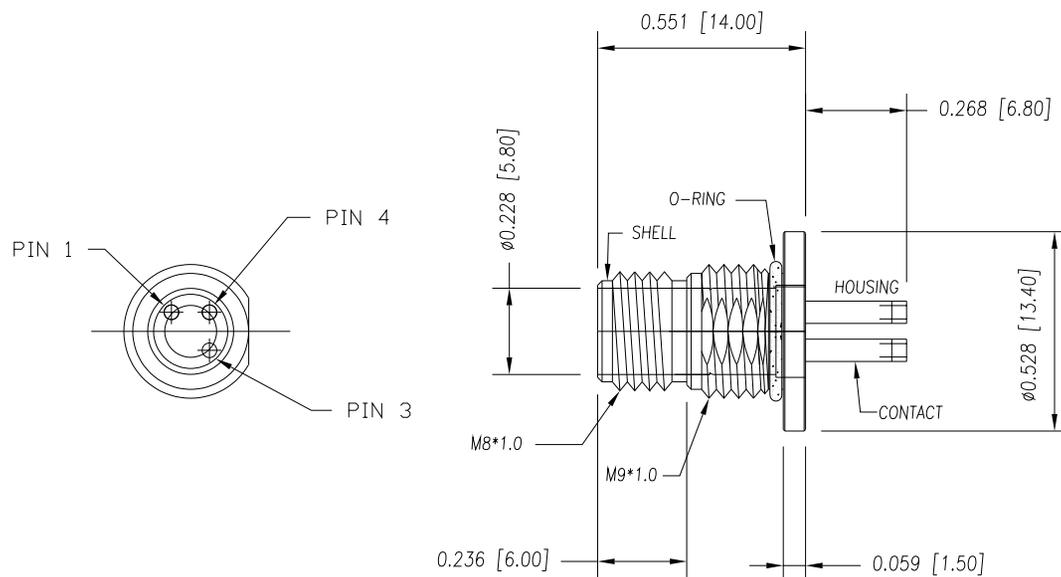


NOTE:
 NUT AND WASHER INTENDED TO BE INSTALLED OUTSIDE PANEL. CAN OMIT WASHER TO INCREASE PANEL THICKNESS

3 = BRASS/NICKEL SHELL & NUT & WASHER
 S = 316 STAINLESS STEEL SHELL & NUT & WASHER

1 = GOLD FLASH
 4 = 10μ" GOLD

855-003-10YR00Y

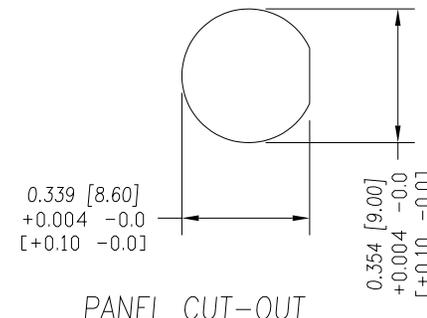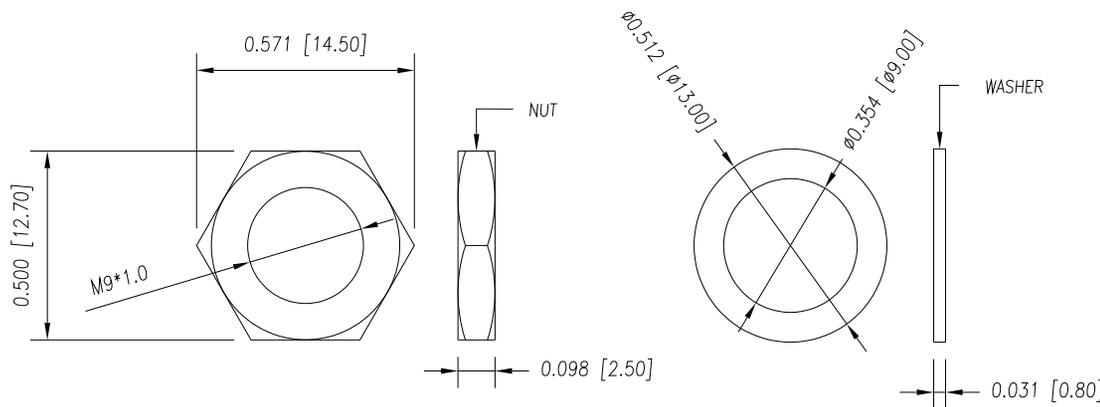

PANEL CUT-OUT

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
M. SIGMON

DATE:
03/04/2016

NorComp

SCALE:
 NTS

SHEET 1 OF 1

REV 5

DWG NO.

855-003-103R00Y