


Order code:
DK-1611-XXX/XX

color:
BL(black),WH(white),B(blue),GR(green),G(grey)

Length: see table ①

PIN OUT		
CN1	WIRE COLOR	CN2
1	ORANGE/WHITE	1
2	ORANGE	2
3	GREEN/WHITE	3
6	GREEN	6
4	BLUE	4
5	BLUE/WHITE	5
7	BROWN/WHITE	7
8	BROWN	8

Length	Feet	mm	tolerance (mm)
001	1	305	+30.5/-15.3
003	3	914	+45.8/-36.6
005	5	1524	±45.8
007	7	2134	±64.1
010	10	3048	±91.5
015	15	4572	±137.3
020	20	6096	±183
025	25	7620	±228.8
050	50	15240	±457.5
100	100	30480	±915

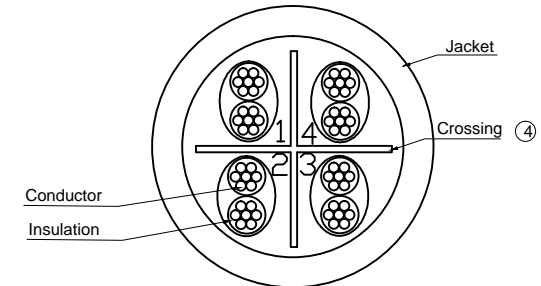

④ Remark: if cable length not exceed 10ft, here no crossing.

Electrical
Open/short/intermittence:100%
Dielectric strength: 2.5KV DC-2seconds.
The operating temperature: -20°C~+60°C

①		Molding PVC	2	Molding PVC 65P
①		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2
④②①		CABLE	1	CAT.6 U/UTP(24AWGx1PR)*4+cross+PVC Jacket OD:5.6±0.3mm
NO.	NAME.	Q'TY	SPECIFICATION	

RoHS compliant
Unit: mm

Scale	FREE					Date	Name	Customer-No.
TOLERANCE		④	Update cable structure	11.07.2023	Luca	Drawn	15.12.2015	Joanna
		③	Update SR	25.08.2022	Luca	Approved	11.07.2023	Luca
		②	Update to CAT.6	15.06.2022	Luca			
DIM	TOL	①	Change the plant	12.04.2022	Luca			
		①	Drawn	15.12.2015	Joanna			
Angle	TOL	Id.	Modification	Date	Name	ASSMANN WSW components		ASSMANN WSW-No. DK-1611-XXX/XX
						Drawing-No.		ASS 7510 CA rev04
						Replace		Sheet