



CN1	WIRE COLOR	CN2
1	ORANGE/WHITE	1
2	ORANGE	2
3	GREEN/WHITE	3
6	GREEN	6
4	BLUE	4
5	BLUE/WHITE	5
7	BROWN/WHITE	7
8	BROWN	8
SHELL	DRAIN WIRE	SHELL

Order code: A-MCSSP-80xxx Order color: Grey
 Order code: A-MCSSP-80xxx/x

Length Code	Length (M)
005	0.5
010	1
020	2
030	3
050	5
070	7
100	10
150	15
200	20
300	30

Order color:
 R: Red
 Y: Yellow
 G: Green
 B: Blue

Tolerance		
Length (M)	Max-M	Mix-M
0.5	0.03	0.025
1	0.04	0.035
L≥2	L x 3%	L x 3%

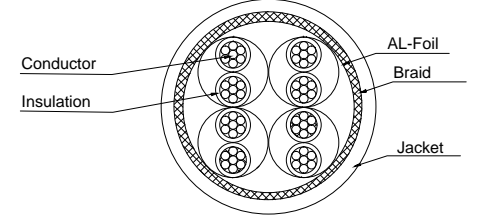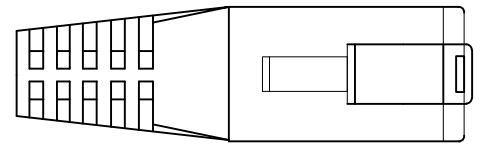

Electrical
 Open/short/intermittence: 100%
 The operating temperature: -20°C~+60°C
 The storage temperature: -20°C~+60°C

RoHS compliant
 Unit: mm

NO.	NAME.	Q'TY	SPECIFICATION
①	AL-Foil	2	Double-sided conductive aluminum foil
①	Molding PVC	2	Molding PVC 65P
①	RJ45 CONN	2	RJ45 8P8C, Two Fork gold plated contacts 3u" gold Shielded
①	CABLE	1	SF/UTP(26AWG*x1PR)*4+AB(AL-MY),PVC OD:5.3±0.3mm

Scale	FREE	Date	Name	Customer-No.
TOLERANCE		Drawn	04.08.2017	Fred
		Approved	12.04.2022	Luca
DIM	TOL	ASSMANN WSW-No. A-MCSSP-80xxx/x		
		Drawing-No. ASS 0841 CA rev01		
Angle	TOL	Replace Sheet		

