


1. Wiring Diagram.

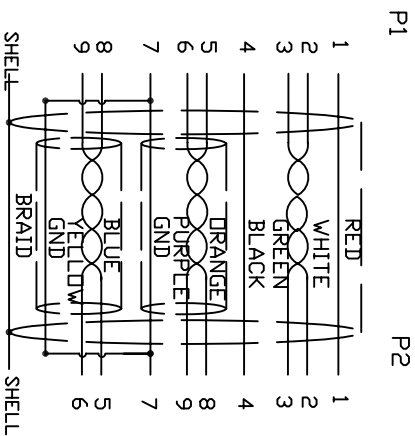

P1 P2

2. Cable test condition :

Open / Short : 100%
 Insulation resistance : 5M ohms
 Contact resistance : 2 ohm
 Hipot : DC 300V / 1 sec

3. Each pcs with PE polybag.

5	CONN	USB3.0 A MAILE G/F BLUE	1	P2	A	INITIAL RELEASE	2014/08/28
4	PVC	45P PVC BLACK OVERMOLD	25g		REV ECHN#	DESCRIPTION	DATE
3	PE	LLDPE 500026 6201	16g		Cnc Tech, LLC P/N: 103-1020-BL-00100 TITLE: CABLE USB3.0 AM TO AM		
2	CONN	USB3.0 A/M G/F BLUE	1	P1			
1	CABLE	《28AWG (7/0.12TC) *1P+D(7/0.10TC)+AL+M》*2+28AWG (7/0.12TC) *1P+24AWG(7/0.2TC)*2C+A+D+B (96/0.12AM) OD5.5 BLACK	1	1000mm	DRAWN	DATE	CUSTOMER P/N:
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF	CHECKED	DATE	CUSTOMER:
		BILL OF MATERIAL			EDWIN	08/24/14	SHEET 1 OF 1

