


## Metal Film Resistors, Axial, Industrial, Precision



### FEATURES

- Small size - conformal coated
- Flame retardant epoxy coating
- Controlled temperature coefficient
- Excellent high frequency characteristics
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)

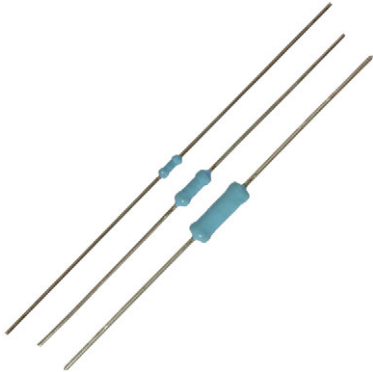

**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**

STANDARD ELECTRICAL SPECIFICATIONS						
GLOBAL MODEL	HISTORICAL MODEL	MAXIMUM WORKING VOLTAGE <sup>(1)</sup> V	POWER RATING $P_{70^{\circ}\text{C}}$ W	RESISTANCE RANGE $\Omega$	TOLERANCE $\pm$ %	TEMPERATURE COEFFICIENT $\pm$ ppm/ $^{\circ}\text{C}$
CMF50	CMF-50	200	0.25	43 to 332K	0.1	25
				22 to 332K	0.25	
				10 to 475K	0.5, 1	
				10 to 475K	0.5	50, 100, 150, 200, 300
				1 to 10M	1	
				0.22 to 10M	5	
CMF55	CMF-55	350	0.4	10 to 1M	0.1, 0.25, 0.5, 1	25
				10 to 1M	0.5	
				1 to 10M	1	50, 100, 150, 200, 300
				0.22 to 22M	5	
CMF60	CMF-60	500	0.65	43 to 1M	0.1	25
				22 to 1.5M	0.25	
				10 to 2.43M	0.5, 1	
				10 to 2.43M	0.5	50, 100, 150, 200, 300
				1 to 22M	1	
				0.22 to 22M	5	
CMF07	CMF-07	350	0.4	1 to 10M	1	50, 100, 150, 200, 300
				0.22 to 22M	5	
CMF20	CMF-20	500	0.65	1 to 22M	1	50, 100, 150, 200, 300
				0.22 to 22M	5	


#### Note

<sup>(1)</sup> Continuous working voltage shall be  $\sqrt{P \times R}$  or maximum working voltage, whichever is less

GLOBAL PART NUMBER INFORMATION														
Global Part Numbering: CMF55301R00FKEK														
C	M	F	5	5	3	0	1	R	0	0	F	K	E	K
GLOBAL MODEL (See Standard Electrical Specifications table)		RESISTANCE VALUE R = Ω K = kΩ M = MΩ R10000 = 0.1 Ω 680K00 = 680 kΩ 1M0000 = 1.0 MΩ			TOLERANCE CODE B = ± 0.1 % C = ± 0.25 % D = ± 0.5 % F = ± 1 % G = ± 2 % J = ± 5 %			TEMPERATURE COEFFICIENT E = 25 ppm H = 50 ppm K = 100 ppm L = 150 ppm N = 200 ppm M = 300 ppm			PACKAGING EA = lead (Pb)-free, T/R (full) EB = lead (Pb)-free, ammo pack (1000 pieces)			

**Note**

- For additional information on packaging, refer to the “Through-Hole Resistor Packaging” document ([www.vishay.com/doc?31544](http://www.vishay.com/doc?31544))

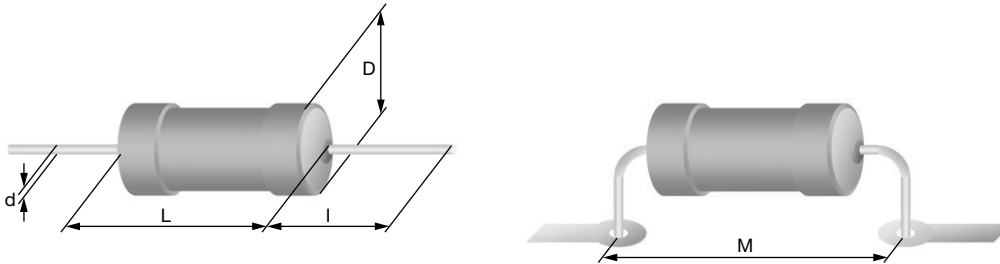**DIMENSIONS** in millimeters


GLOBAL MODEL	D <sub>max.</sub>	L <sub>max.</sub>	d <sub>nom.</sub>	I <sub>min.</sub>	M <sub>min.</sub>	MASS (mg)
CMF50	1.6	3.6	0.5	29	5	125
CMF55	2.5	6.5	0.6	28	10	220
CMF60	4.2	11.9	0.8	31	15	700
CMF07	2.5	6.5	0.6	28	10	220
CMF20	4.2	11.9	0.8	31	15	700

TECHNICAL SPECIFICATIONS						
PARAMETER	UNIT	CMF50	CMF55	CMF07	CMF60	CMF20
Maximum Working Voltage	V <sub>≡</sub>	≤ 300	≤ 250	≤ 250	≤ 500	≤ 500
Insulation Voltage (1 Min)	V <sub>eff</sub>	300	500	500	800	800
Dielectric Strength	V <sub>AC</sub>	300	450	450	750	750
Insulation Resistance	Ω	≥ 10 <sup>11</sup>				
Operating Temperature Range	°C	-55 to +125				
Terminal Strength (Pull Test)	lb	2	2	5	2	5
Weight (Max.)	mg	125	220	220	700	700

TEMPERATURE COEFFICIENT CODES	
GLOBAL TC CODE	TEMPERATURE COEFFICIENT
E	25 ppm/°C
H	50 ppm/°C
K	100 ppm/°C
L	150 ppm/°C
N	200 ppm/°C
M	300 ppm/°C




**LOAD LIFE SHIFT DUE TO POWER AND DERATING AT +70 °C**

The power rating for the CMF parts is tied to the derating temperature, the heat rise of the parts, and the  $\Delta R$  for the load life performance. When the tables/graphs below are used together they show that when the parts are run at their higher power ratings, the parts will run hotter, which has the potential of causing the resistance of the parts to shift more over the life of the part.

**LOAD LIFE SHIFT VS. POWER RATING**

LOAD LIFE	MAXIMUM $\Delta R$ (TYPICAL TEST LOTS)		
	$\pm 0.15\%$	$\pm 0.5\%$	$\pm 1.0\%$
MODEL	POWER RATING AT +70 °C		
CMF50	1/10 W	1/8 W	1/4 W
CMF55, CMF07	1/8 W	1/4 W	1/2 W
CMF60, CMF20	1/4 W	1/2 W	1 W

CMF resistors have an operating temperature range of -55 °C to +125 °C. They must be derated at high ambient temperatures according to the derating curve.

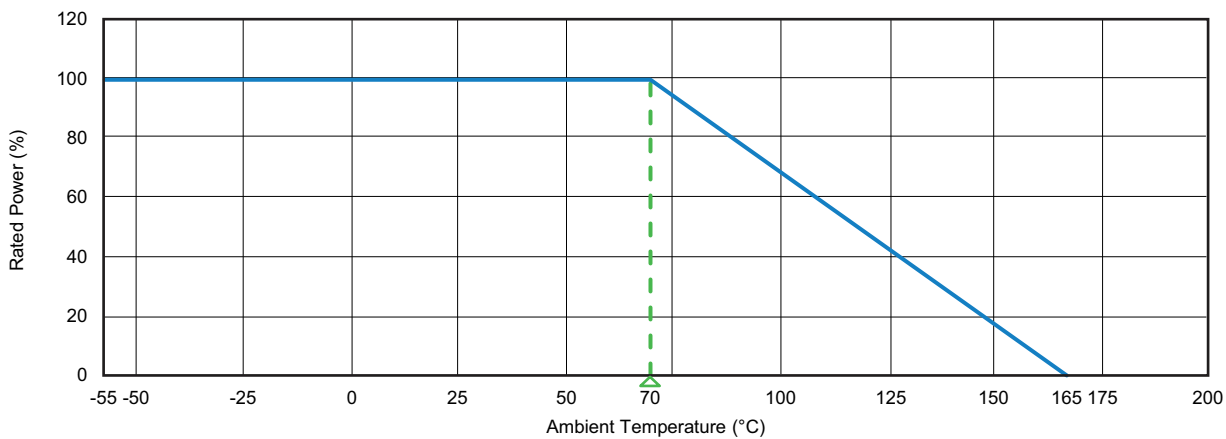

**DERATING**

**MATERIAL SPECIFICATIONS**

<b>Element</b>	Vacuum-deposited nickel-chrome alloy	<b>Coating</b>	Flame retardant epoxy, formulated for superior moisture protection
<b>Core</b>	Fire-cleaned high purity ceramic	<b>Solderability</b>	Continuous satisfactory coverage when tested in accordance with JSTD-002

**MARKING**

Temperature coefficient: T00 = 200 ppm, T0 = 150 ppm, T1 = 100 ppm, T2 = 50 ppm, T9 = 25 ppm, M = 300 ppm

CMF50: (2 lines)

CMF55, CMF60, CMF65, CMF70: (4 lines)

3.01 Value  
K 1 % Ohm, K or M sign and tolerance

DALE Manufacturer's name  
CMF55 Style and size  
49.9 k $\Omega$  Value  
1 % T2 Tolerance and TC



<b>PERFORMANCE</b>	
<b>TEST (TEST METHODS - MIL-STD-202)</b>	<b>AT +70 °C</b>
	<b>MAXIMUM <math>\Delta R</math> (TYPICAL TEST LOTS)</b>
Short Time Overload	$\pm 0.05$ %
Shock	$\pm 0.01$ %
Vibration	$\pm 0.04$ %
Temperature Cycling	$\pm 0.15$ %
Load Life	Varies based on power rating used; see "Load Life Shift Due to Power And Derating" table
Dielectric Withstanding Voltage	$\pm 0.01$ %
Effect of Solder	$\pm 0.03$ %



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.