


P/N 3132-20-1-2000-0XX-1-TD

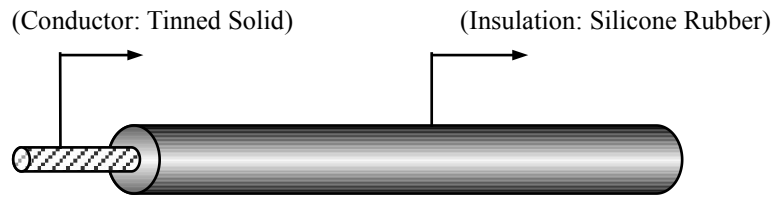

UL3132 Silicone Wire 150°C 300V (20AWG)

CONSTRUCTION:	Tinned Solid copper conductor, 1/0.813mm strands. Overall Diameter=1.70+/-0.10mm Insulation Thickness: 0.39mm
CERTIFICATION & APPROVALS:	DUAL-RATED AWM: Can be used in USA and Canada UL Subject 758 UL FILE NO:E108485 CSA Standard CSA FILE NO:LL84687 Printed Markings: AWM 3132 150°C 300V E108485-S ()AWG REI HSING CSA I A 150° 300V LL84687 ()AWG FT2 HF
PHYSICAL & ELECTRICAL PROPERTIES:	Rated Temperature: 150°C ~ -30°C Rated Voltage: 300V Insulation Potential Strength: 2000 VAC/min. Flexibility: XLPE Insulation Maximum Conductor Resistance: 36.0 ohm/km Resistant to: Oil, hot & cold, lighter, flexing.
APPLICATIONS:	Silicone Rubber Wire, Tinned Solid ,pass FT2 flame test Suitable for internal wires of electronic & electrical equipment.
PACKAGING:	2000ft per reel.
ENVIRONMENTAL APPROVALS:	Conforms to all current RoHS directives as laid out in EU Directive 2011/65/EC. Current SGS reports for this wire are available upon request.

P/N's & COLORS

3132-20-1-2000-001-1-TD BLACK	3132-20-1-2000-002-1-TD WHITE	3132-20-1-2000-003-1-TD YELLOW	3132-20-1-2000-004-1-TD RED	3132-20-1-2000-005-1-TD BLUE
3132-20-1-2000-006-1-TD BROWN	3132-20-1-2000-007-1-TD GREEN	3132-20-1-2000-008-1-TD ORANGE	3132-20-1-2000-010-1-TD VIOLET	3132-20-1-2000-011-1-TD GREEN + YELLOW