


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00116	Connector, dc plug, 3.5x1.35xL22 mm, brass nickel plated	1	
2	50-00057	Connector, dc jack, 3.5x1.35xL16.5 mm, molding style	1	
3	30-00404	Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC, 87A	1	
4	24-00002	Overmold, PVC	1	black
5	24-00005	Overmold, PVC	1	black

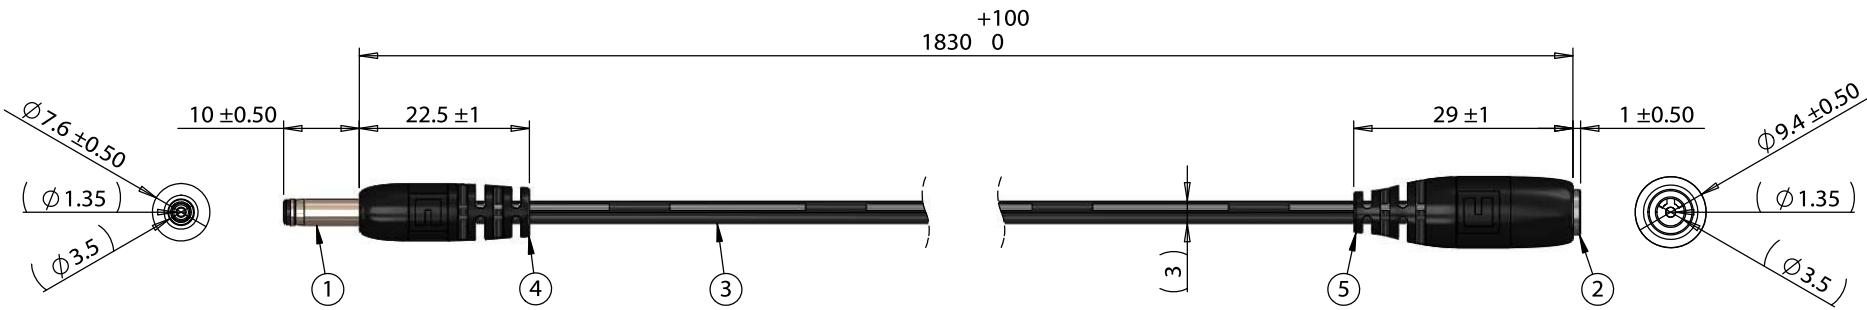

Wiring Diagram

50-00116	wire color	50-00057
center	black with stripe	center
sleeve	black	sleeve

Notes:

Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared: GL <small>Digitally signed by GL Date: 2018-03-06 15:52:19 -08'00'</small>	Notes: RoHS compliant Function test: no open, no short circuit, no intermittent	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	01/26/2018	Initial release	Verified: JP <small>Digitally signed by JP Date: 2018-03-07 10:25:52 -08'00'</small>	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 3.5x1.35x10 mm 50-00116 dc plug to 3.5x1.35 mm 50-00057 dc jack, 24 AWG, UL2468
					Size: A Part number: 10-02524
					Scale: 1:1
					Sheet 1 of 1