

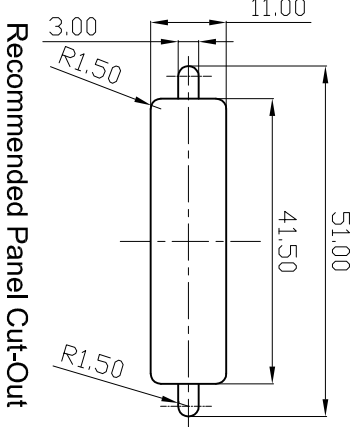
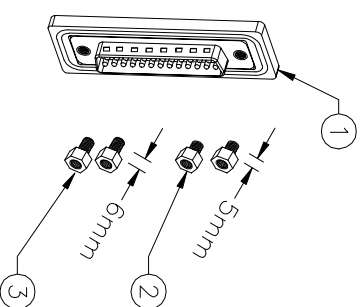
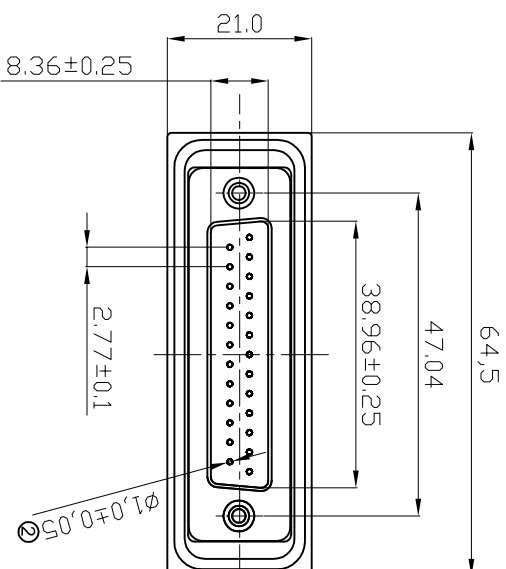


Panel Thickness
Screw L=5.0 For Panel Thickness Under 1.2mm
Screw L=6.0 For Panel Thickness Between 1.2-2.0mm

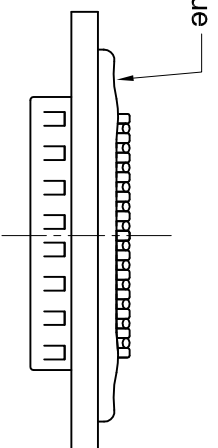

Recommended Panel Cut-Out



NOTES:

MATERIAL

1. Waterproof Rate: IP68
2. Connector: D-SUB 25PIN Male
3. Core Color: Black
4. Do Mating Test After Glued

RoHS compliant
Unit: mm

Scale	Free								
TOLERANCE									
X.X	±0.25								
X.XX	±0.10								
X.XXX	±0.05								
DIM	TOL	②	Cancel LOGO and change dimension	25.01.2018	Tom				
ANGLE	±1°	①	Drawn	24.12.2008	JACK				
X.X°	±X°								
Angle	TOL		Modification						

ASSMANN
components

Customer-No.
ASSMANN WSW-No.
A-DS 25 LL-WP

Drawing-No.
ASS 3268 CO rev02

Replace Sheet

1 2 3 4 5 6 7

A B C D E F G H