




AC and Pulse Metallized Polypropylene Film Capacitors KP/MMKP Radial Potted Type

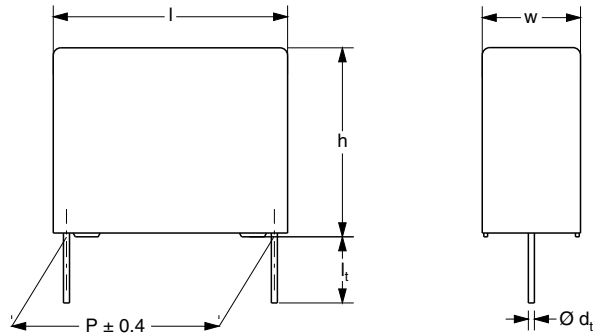

Dimensions in mm

APPLICATIONS

Where high currents and steep pulses occur.
Power supplies.

MARKING

C-value; tolerance; rated voltage; manufacturer's type designation; code for dielectric material; manufacturer's emblem; code for factory of origin; year and week of manufacture

DIELECTRIC

Polypropylene film

ELECTRODES

Metallized film and aluminum foil

ENCAPSULATION

Flame retardant plastic case and epoxy resin
(UL-class 94 V-0)

CONSTRUCTION

Internal serial construction

LEADS

Tinned wire

CAPACITANCE RANGE (E24 SERIES)

0.0047 μ F to 0.27 μ F

FEATURES

15 mm to 27.5 mm pitch. Supplied loose and taped on reel

Material categorization:
for definitions of compliance please see
www.vishay.com/doc?99912

CAPACITANCE TOLERANCE

$\pm 5\%$; $\pm 3.5\%$

RATED (DC) VOLTAGE

630 V; 1000 V

RATED (AC) VOLTAGE

300 V; 400 V

RATED PEAK-TO-PEAK VOLTAGE

850 V; 1100 V

CLIMATIC CATEGORY

55/100/56

RATED TEMPERATURE

85 °C

MAXIMUM APPLICATION TEMPERATURE

100 °C

REFERENCE SPECIFICATIONS

IEC 60384-17

PERFORMANCE GRADE

Grade 1 (long life)

STABILITY GRADE

Grade 2

DETAIL SPECIFICATION


For more detailed data and test requirements see "Type Detail Specification HQN-384-17/101"



RoHS
COMPLIANT
HALOGEN
FREE
GREEN
(5-2008)



COMPOSITION OF CATALOG NUMBER

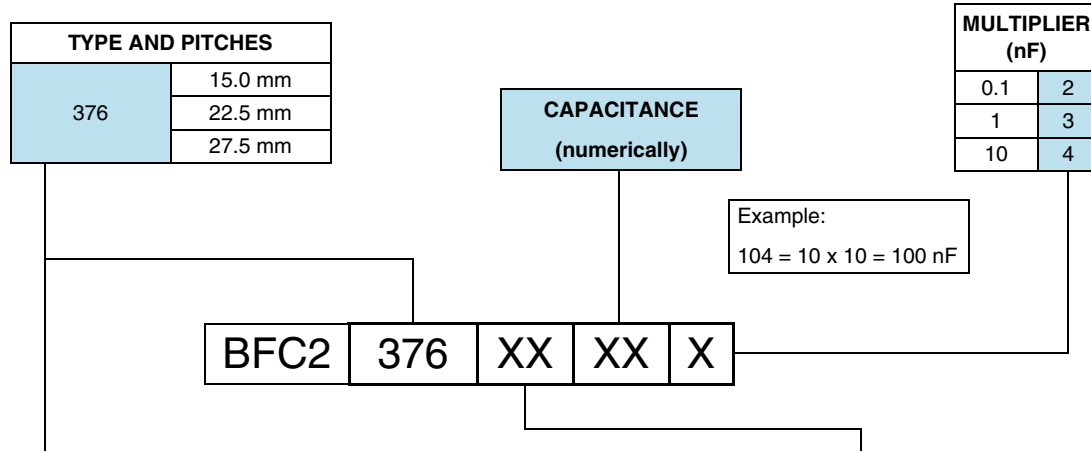

| TYPE | PACKAGING | LEAD CONFIGURATION | ON REQUEST | | |
|------|------------------------------|--|------------|-------|--------|
| | | | C-TOL. | 630 V | 1000 V |
| 376 | loose in box | lead length 5.0 ± 1.0 mm | ± 5 % | 62 | 72 |
| | | | ± 3.5 % | 63 | 73 |
| | | lead length 3.5 ± 0.3 mm | ± 5 % | 68 | 78 |
| | | | ± 3.5 % | 69 | 79 |
| | taped on reel ⁽¹⁾ | H = 18.5 mm; P ₀ = 12.7 mm; reel diameter 500 mm | ± 5 % | 65 | 75 |
| | | | ± 3.5 % | 66 | 76 |

Note

⁽¹⁾ For detailed tape specification refer to “Packaging Information”: www.vishay.com/doc?28139

SPECIFIC REFERENCE DATA (630 V_{DC})

| DESCRIPTION | VALUE | |
|---|------------------------|-------------------------|
| | at 10 kHz | at 100 kHz |
| Tangent of loss angle: | | |
| P = 15.0 mm | ≤ 5 x 10 ⁻⁴ | ≤ 10 x 10 ⁻⁴ |
| P = 22.5 mm | ≤ 6 x 10 ⁻⁴ | ≤ 15 x 10 ⁻⁴ |
| P = 27.5 mm | ≤ 7 x 10 ⁻⁴ | ≤ 20 x 10 ⁻⁴ |
| Rated voltage pulse slope (dU/dt) _R : | | |
| P = 15.0 mm | 4000 V/μs | |
| P = 22.5 mm | 1400 V/μs | |
| P = 27.5 mm | 900 V/μs | |
| R between leads at 500 V; 1 min | > 100 000 MΩ | |
| R between interconnected leads and case; 500 V; 1 min | > 100 000 MΩ | |
| Ionization (AC) voltage (typical value) at 50 pC peak discharge | > 400 V | |
| Withstanding (DC) voltage (cut off current 10 mA) ⁽¹⁾ ; rise time 1000 V/s | 1008 V; 1 min | |
| Withstanding (DC) voltage between leads and case | 2840 V; 1 min | |

Note

⁽¹⁾ See “Voltage Proof Test for Metalized Film Capacitors”: www.vishay.com/doc?28169


 $U_{RDC} = 630 \text{ V}; U_{RAC} = 300 \text{ V}; U_{P-P} = 850 \text{ V}$

| C (μF) | DIMENSIONS W x H x L (mm) | MASS (g) ⁽²⁾ | CATALOG NUMBER BFC2 376 AND PACKAGING | | |
|--|---------------------------------|----------------------------|---|-----------|--|
| | | | LOOSE IN BOX | | REEL ⁽¹⁾ H = 18.5 mm P ₀ = 12.7 mm |
| | | | $l_t = 5.0 \pm 1.0 \text{ mm}$ | ALL LEADS | |
| | | | C-tol. = $\pm 5 \%$ | SPQ | SPQ |
| LAST 5 DIGITS OF CATALOG NUMBER | | | | | |
| Pitch = $15.0 \pm 0.4 \text{ mm}$; $d_t = 0.60 \pm 0.06 \text{ mm}$ | | | | | |
| 0.0068 0.0075 0.0082 0.0091 | 5.0 x 11.0 x 17.5 | 1.1 | 62682 62752 62822 62912 | 1000 | 1100 |
| 0.010 0.011 0.012 0.013 | 6.0 x 12.0 x 17.5 | 1.5 | 62103 62113 62123 62133 | 1000 | 900 |
| Pitch = $15.0 \pm 0.4 \text{ mm}$; $d_t = 0.80 \pm 0.08 \text{ mm}$ | | | | | |
| 0.015 0.016 0.018 | 7.0 x 13.5 x 17.5 | 2.0 | 62153 62163 62183 | 1000 | 800 |
| 0.020 0.022 | 8.5 x 15.0 x 17.5 | 2.6 | 62203 62223 | 1000 | 650 |
| Pitch = $22.5 \pm 0.4 \text{ mm}$; $d_t = 0.80 \pm 0.08 \text{ mm}$ | | | | | |
| 0.024 0.027 0.030 | 6.0 x 15.5 x 26.0 | 2.8 | 62243 62273 62303 | 300 | 600 |
| 0.033 0.036 0.039 | 7.0 x 16.5 x 26.0 | 3.5 | 62333 62363 62393 | 200 | 550 |
| 0.043 0.047 0.051 0.056 | 8.5 x 18.0 x 26.0 | 4.5 4.5 4.5 5.1 | 62433 62473 62513 62563 | 200 | 450 |
| Pitch = $27.5 \pm 0.4 \text{ mm}$; $d_t = 0.80 \pm 0.08 \text{ mm}$ | | | | | |
| 0.062 0.068 0.075 | 9.0 x 19.0 x 31.0 | 6.2 | 62623 62683 62753 | 100 | |
| 0.082 0.091 0.10 0.11 | 11.0 x 21.0 x 31.0 | 8.3 | 62823 62913 62104 62114 | 100 | |
| 0.12 0.13 0.15 0.16 | 13.0 x 23.0 x 31.0 | 10.8 | 62124 62134 62154 62164 | 100 | |
| 0.18 0.20 | 15.0 x 25.0 x 31.0 | 13.0 | 62184 62204 | 100 | |
| 0.22 0.24 0.27 | 18.0 x 28.0 x 31.0 | 19.0 | 62224 62244 62274 | 100 | |

Notes

- SPQ = Standard Packing Quantity

⁽¹⁾ H = in-tape height; P₀ = sprocket hole distance; for detailed specifications refer to packaging information

⁽²⁾ Weight for short lead product only

**SPECIFIC REFERENCE DATA (1000 V_{DC})**

| DESCRIPTION | VALUE | |
|---|---|--------------------------|
| | at 10 kHz | at 100 kHz |
| Tangent of loss angle: | | |
| P = 15.0 mm | $\leq 5 \times 10^{-4}$ | $\leq 10 \times 10^{-4}$ |
| P = 22.5 mm | $\leq 6 \times 10^{-4}$ | $\leq 15 \times 10^{-4}$ |
| P = 27.5 mm | $\leq 8 \times 10^{-4}$ | $\leq 20 \times 10^{-4}$ |
| Rated voltage pulse slope (dU/dt) _R : | | |
| P = 15.0 mm | 7000 V/μs | |
| P = 22.5 mm | 2500 V/μs | |
| P = 27.5 mm | 1600 V/μs | |
| R between leads at 500 V; 1 min | > 100 000 MΩ | |
| R between interconnected leads and case; 500 V; 1 min | > 100 000 MΩ | |
| Ionization (AC) voltage (typical value) at 50 pC peak discharge | > 500 V | |
| Withstanding (DC) voltage (cut off current 10 mA) ⁽¹⁾ ; rise time 1000 V/s for C ≤ 47 nF for C > 47 nF | 1600 V; 1 min [1, 6 - (0, 0364 · √C - 47)] x 1000 V; 1 min | |
| Withstanding (DC) voltage between leads and case | 2840 V; 1 min | |

Note

⁽¹⁾ See "Voltage Proof Test for Metalized Film Capacitors": www.vishay.com/doc?28169

U_{RDC} = 1000 V; U_{RAC} = 400 V; U_{P-P} = 1100 V

| C (μF) | DIMENSIONS W x H x L (mm) | MASS (g) ⁽²⁾ | CATALOG NUMBER BFC2 376 AND PACKAGING | | |
|--|---------------------------------|----------------------------|---|-----------|--|
| | | | LOOSE IN BOX | | REEL ⁽¹⁾ H = 18.5 mm P ₀ = 12.7 mm |
| | | | l _t = 5.0 ± 1.0 mm | ALL LEADS | |
| | | | C-tol. = ± 5 % | SPQ | SPQ |
| LAST 5 DIGITS OF CATALOG NUMBER | | | | | |
| Pitch = 15.0 ± 0.4 mm; d_t = 0.60 ± 0.06 mm | | | | | |
| 0.0047 | 5.0 x 11.0 x 17.5 | 1.1 | 72472 | 1000 | 1100 |
| 0.0051 | | | 72512 | | |
| 0.0056 | | | 72562 | | |
| 0.0062 | 6.0 x 12.0 x 17.5 | 1.5 | 72622 | 1000 | 900 |
| 0.0068 | | | 72682 | | |
| 0.0075 | | | 72752 | | |
| 0.0082 | | | 72822 | | |
| Pitch = 15.0 ± 0.4 mm; d_t = 0.80 ± 0.08 mm | | | | | |
| 0.0091 | 7.0 x 13.5 x 17.5 | 2.0 | 72912 | 1000 | 800 |
| 0.010 | | | 72103 | | |
| 0.011 | | | 72113 | | |
| 0.012 | | | 72123 | | |
| Pitch = 22.5 ± 0.4 mm; d_t = 0.80 ± 0.08 mm | | | | | |
| 0.013 | 6.0 x 15.5 x 26.0 | 2.8 | 72133 | 300 | 600 |
| 0.015 | 7.0 x 16.5 x 26.0 | 3.5 | 72153 | 200 | 550 |
| 0.016 | | | 72163 | | |
| 0.018 | | | 72183 | | |
| 0.020 | 8.5 x 18.0 x 26.0 | 4.5 | 72203 | 200 | 450 |
| 0.022 | | | 72223 | | |
| 0.024 | | | 72243 | | |
| 0.027 | | | 72273 | | |
| 0.03 | | | 72303 | | |
| 0.033 | | | 72333 | | |
| 0.036 | | | 72363 | | |
| 0.039 | | | 10.0 x 19.5 x 26.0 | | |



| C (μ F) | DIMENSIONS W x H x L (mm) | MASS (g) ⁽²⁾ | CATALOG NUMBER BFC2 376 AND PACKAGING | | |
|---|---------------------------------|----------------------------|---|-----------|--|
| | | | LOOSE IN BOX | | REEL ⁽¹⁾ H = 18.5 mm P ₀ = 12.7 mm |
| | | | $l_t = 5.0 \pm 1.0$ mm | ALL LEADS | |
| | | | C-tol. = ± 5 % | SPQ | SPQ |
| LAST 5 DIGITS OF CATALOG NUMBER | | | | | |
| Pitch = 27.5 ± 0.4 mm; $d_t = 0.80 \pm 0.08$ mm | | | | | |
| 0.043 | 9.0 x 19.0 x 31.0 | 6.2 | 72433 | 100 | |
| 0.047 | | | 72473 | | |
| 0.051 | | | 72513 | | |
| 0.056 | 11.0 x 21.0 x 31.0 | 8.3 | 72563 | 100 | |
| 0.062 | | | 72623 | | |
| 0.068 | | | 72683 | | |
| 0.075 | | | 72753 | | |
| 0.082 | 13.0 x 23.0 x 31.0 | 10.8 | 72823 | 100 | |
| 0.091 | | | 72913 | | |
| 0.10 | | | 72104 | | |
| 0.11 | 15.0 x 25.0 x 31.0 | 13.0 | 72114 | 100 | |
| 0.12 | | | 72124 | | |
| 0.13 | | | 72134 | | |
| 0.15 | | | 72154 | | |
| 0.16 | 18.0 x 28.0 x 31.0 | 19.0 | 72164 | 100 | |
| 0.18 | | | 72184 | | |

Notes

- SPQ = Standard Packing Quantity

⁽¹⁾ H = in-tape height; P₀ = sprocket hole distance; for detailed specifications refer to packaging information

⁽²⁾ Weight for short lead product only



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.