



# 700W True Sine Wave DC-AC Power Inverter

# TS-700 series




### ■ Features :

- True sine wave output (THD<3%)
- High surge power up to 1400W
- High efficiency up to 91%
- Power ON-OFF switch
- Standby saving mode can be selectable
- Front panel indicator for operation status
- Built-in fan ON-OFF control function
- Protections: Bat. low alarm / Bat. low shutdown / Over voltage / Over temp. / Output short / Reverse polarity / Overload
- Application : Home appliance, power tools, office and portable equipment, vehicle and yacht ...etc.
- 3 years warranty



### SPECIFICATION

| MODEL NO.                |  | TS-700-112□   | TS-700-124□ | TS-700-148□ | TS-700-212□  | TS-700-224□ | TS-700-248□ |
|--------------------------|--|---|-------------|-------------|--|-------------|-------------|
|                          |  | □ = A, F  |             |             | □ = B, C, D  |             |             |
| OUTPUT                   | RATED POWER (Typ.)   | 700W  |             |             |  |             |             |
|                          | MAXIMUM OUTPUT POWER (Typ.)  | 800W for 180 sec. / 1050W for 10 sec. / surge power 1400W for 30 cycles   |             |             |  |             |             |
|                          | AC VOLTAGE   | Factory setting set at 110VAC   |             |             | Factory setting set at 230VAC  |             |             |
|                          | FREQUENCY  | 100 / 110 / 115 / 120VAC selectable by setting button S.W   |             |             | 200 / 220 / 230 / 240VAC selectable by setting button S.W                            |             |             |
|                          | WAVEFORM   | True sine wave (THD<3%)   |             |             |  |             |             |
|                          | AC REGULATION (Typ.)   | ±3.0%   |             |             |  |             |             |
|                          | SAVING MODE (Typ.)   | Default disabled. Load ≤5W will be changed to standby mode  |             |             |  |             |             |
| FRONT PANEL INDICATOR    | Battery voltage level, output load level, saving mode, fault and operation status  |   |             |             |  |             |             |
| INPUT                    | BAT. VOLTAGE   | 12V   | 24V         | 48V         | 12V  | 24V         | 48V         |
|                          | VOLTAGE RANGE (Typ.)   | 10.5 ~ 15VDC  | 21 ~ 30VDC  | 42 ~ 60VDC  | 10.5 ~ 15VDC   | 21 ~ 30VDC  | 42 ~ 60VDC  |
|                          | DC CURRENT (Typ.)  | 75A   | 38A         | 19A         | 75A  | 38A         | 19A         |
|                          | NO LOAD DISSIPATION (Typ.)   | ≤6W @ standby saving mode   |             |             |  |             |             |
|                          | OFF MODE CURRENT DRAW  | ≤1mA  |             |             |  |             |             |
|                          | EFFICIENCY (Typ.)  | 86%   | 88%         | 89%         | 89%  | 90%         | 91%         |
|                          | BATTERY TYPES  | Open & sealed Lead Acid   |             |             |  |             |             |
| BATTERY INPUT PROTECTION | FUSE   | 40A*3   | 30A*2       | 20A*2       | 40A*3  | 30A*2       | 20A*2       |
|                          | BAT. LOW ALARM   | 11.3±4%   | 22.5±4%     | 45±4%       | 11.3±4%  | 22.5±4%     | 45±4%       |
|                          | BAT. LOW SHUTDOWN  | 10.5±4%   | 21±4%       | 42±4%       | 10.5±4%  | 21±4%       | 42±4%       |
|                          | BAT. POLARITY  | By internal fuse open   |             |             |  |             |             |
| OUTPUT PROTECTION        | OVER TEMPERATURE   | 80°C ± 5°C  |             |             | 75°C ± 5°C   |             |             |
|                          | OUTPUT SHORT   | Protection type : Shut down o/p voltage, re-power on to recover; by internal RTH3 detect on heatsink of power diode |             |             |  |             |             |
|                          | OVER LOAD (Typ.)   | 105 ~ 115% load for 180 sec., 115% ~ 150% load for 10 sec.  |             |             |  |             |             |
|                          | GFCI PROTECTION  | Optional (Only type F)  |             |             |  | None        |             |
| ENVIRONMENT              | WORKING TEMP.  | 0 ~ +40°C @ 100% load ; +60°C @ 50% load  |             |             |  |             |             |
|                          | WORKING HUMIDITY   | 20% ~ 90% RH non-condensing   |             |             |  |             |             |
|                          | STORAGE TEMP., HUMIDITY  | -30 ~ +70°C / -22 ~ +158°F, 10 ~ 95% RH non-condensing  |             |             |  |             |             |
|                          | VIBRATION  | 10 ~ 500Hz, 3G 10min./1cycle, 60min. each along X, Y, Z axes  |             |             |  |             |             |
| SAFETY & EMC             | SAFETY STANDARDS   | EAC TP TC 004 approved, Design refer to UL458   |             |             | IEC62368-1 CB, EAC TP TC 004 approved; Meet BS EN/EN62368-1                          |             |             |
|                          | WITHSTAND VOLTAGE  | Bat I/P - AC O/P:3.0KVAC AC O/P - FG:1.5KVAC  |             |             |  |             |             |
|                          | ISOLATION RESISTANCE   | Bat I/P - AC O/P, Bat I/P - FG, AC O/P - FG: 100M ohms / 500VDC / 25°C / 70% RH                                     |             |             |  |             |             |
|                          | EMC EMISSION   | Compliance to FCC class A, EAC TP TC 020  |             |             | Compliance to BS EN/EN55032 class A, 72/ 245/ CEE, 95/ 54/ CE, E-Mark, EAC TP TC 020 |             |             |
|                          | EMC IMMUNITY   | Compliance to EAC TP TC 020   |             |             | Compliance to BS EN/EN61000-4-2,3,8, EAC TP TC 020                                   |             |             |
| OTHERS                   | MTBF   | 74.4K hrs min. MIL-HDBK-217F (25°C)   |             |             |  |             |             |
|                          | DIMENSION  | 295*184*70mm (L*W*H)  |             |             |  |             |             |
|                          | PACKING  | 3.8Kg; 2pcs/8.6Kg/1.27CUFT  |             |             |  |             |             |
| NOTE                     | <p>1.Efficiency is tested by 530W, linear load at 13V, 26V, 52V input voltage.</p> <p>2.All parameters not specified above are measured at rated load, 25°C of ambient temperature and set to factory setting.</p> <p>3.Input derating capacity referenced by curve 2.</p> <p>4.Output derating capacity referenced by curve 1.</p> <p>5.The tolerance of each voltage value by models is:112/212→±0.5V;124/224→±1V;148/248→±2V.</p> <p>6.TH.D is tested by 700W, linear load at 13,26,52V input voltage.</p> <p>7.The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>8.Type F for 60Hz only.</p> <p>※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a></p> |   |             |             |  |             |             |

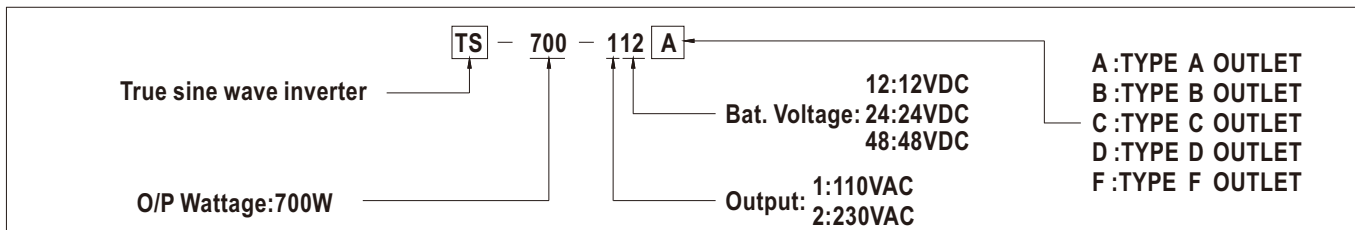



AC Output Socket (optional)

| MODEL NO.   | TS-700-112 | TS-700-124  | TS-700-148 | TS-700-212 | TS-700-224 | TS-700-248 |
|-------------|------------|-------------|------------|------------|------------|------------|
| Socket type |            |             |            |            |            |            |
|             | TYPE-A     | TYPE-F      | TYPE-B     | TYPE-C     | TYPE-D     | TYPE-D     |
|             | Standard   | Optional    | Standard   | Optional   | Optional   | Optional   |
| Country     | USA        | GFCI (60Hz) | EUROPE     | AUSTRALIA  | U.K        | U.K        |
| Certificate |            |             |            |            |            |            |

Mechanical Specification

(Unit: mm , tolerance ± 1mm)

Case No.804

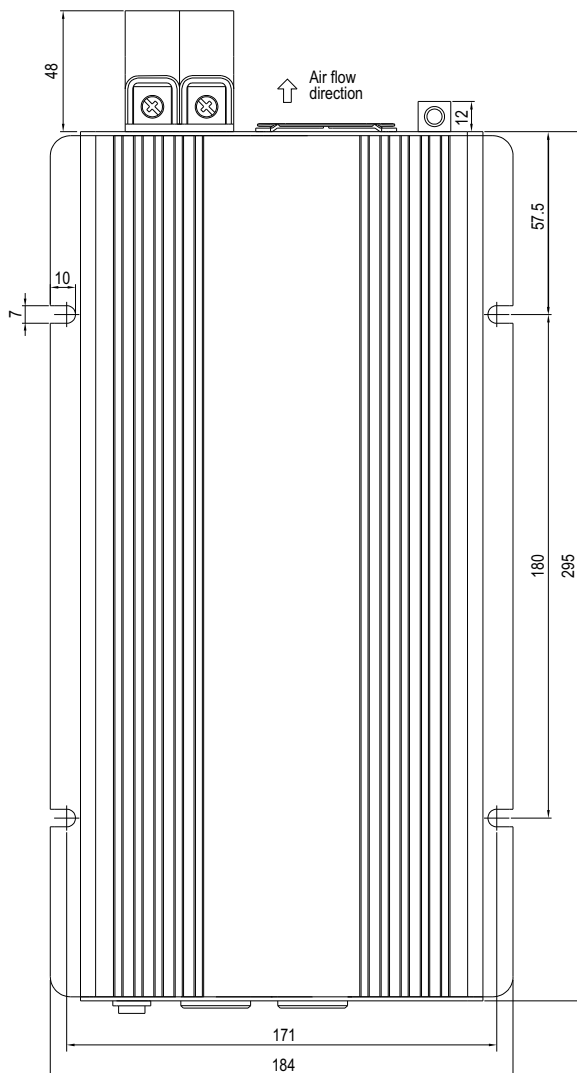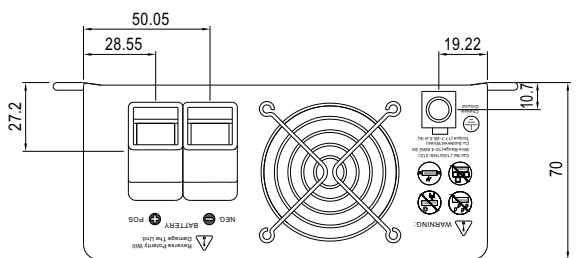

Derating Curve

