

STRADA-SQ-T2

IESNA Type II (medium) beam, applicable for European P-class standard pedestrian lighting and M-class roads. Version with location pins. Assembly with installation tape.

SPECIFICATION:

Dimensions 25.0 x 25.0 mm

Height 8.7 mm

Fastening tape, pin, screw

ROHS compliant yes 1



MATERIALS:

Component	Type	Material	Colour	Finish	Length
STRADA-SQ-T2	Single lens	PMMA	clear		25.0
ROSE-TAPE	Tape	Acrylic foam	black		21.6


ORDERING INFORMATION:

Component Qty in box MOQ MPQ Box weight (kg)

CA13509_STRADA-SQ-T2 Single lens 98 7.8

» Box size:

PRODUCT DATASHEET CA13509_STRADA-SQ-T2

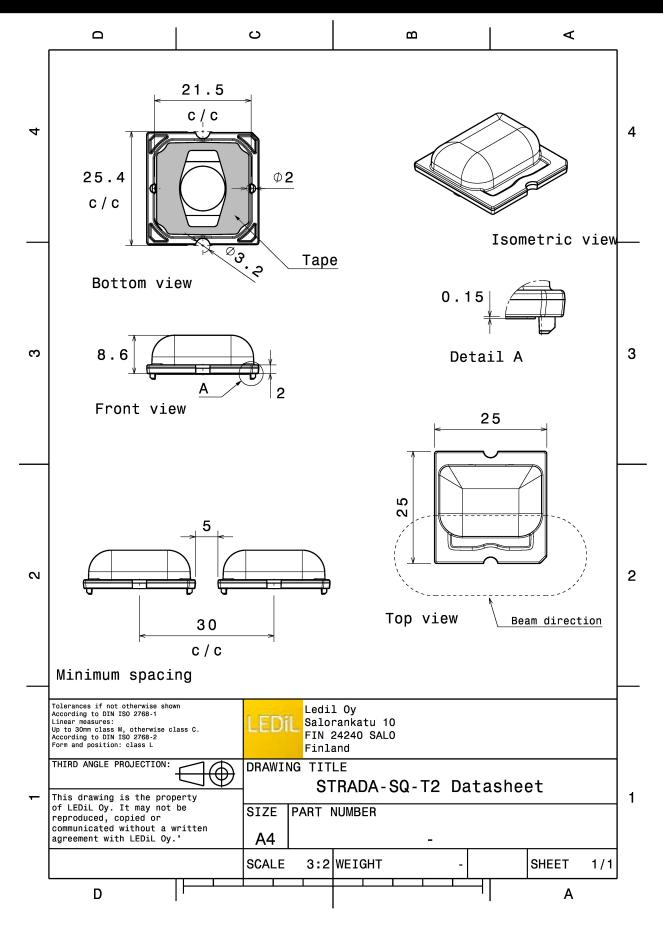


See also our general installation guide: www.ledil.com/installation_guide



OPTICAL RESULTS (MEASURED):

CREE \$


LEDXHP50FWHM / FWTMAsymmetricEfficiency94 %Peak intensity0.7 cd/lmLEDs/each optic1Light colour/typeWhiteRequired components:



Light distribution files

CREE \$


LED XP-L HI
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files

MILEDS

LED LUXEON M/MX
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:




Light distribution files



OPTICAL RESULTS (MEASURED):

MUMILEDS


LED LUXEON MZ
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files



LED LUXEON TX
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:




Light distribution files



LED LUXEON XR-M Linear (L2M0-xxxx003MC3300)

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:






OPTICAL RESULTS (MEASURED):

WNICHIA


LED NV4x144A
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files

WNICHIA


LED NVSW319B
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files

SAMSUNG

LED LH508A
FWHM / FWTM Asymmetric
Efficiency 81 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files





LED MHB-A/B
FWHM / FWTM Asymmetric
Efficiency 91 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


Light distribution files



LED MK-R2 FWHM / FWTM Asymmetric

Efficiency %
LEDs/each optic 1
Light colour/type White

Required components:



Light distribution files



LED XM-L2
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:





LED XP-G3
FWHM / FWTM Asymmetric
Efficiency 91 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

100 120 120 140 140 140


Light distribution files



LED LUXEON 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:



Light distribution files



LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour/type White
Required components:

Light distribution files

Protective plate, glass




WNICHIA

LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.4 cd/lm
LEDs/each optic 9
Light colour/type White

Required components:

Protective plate, glass




Light distribution files

WNICHIA

LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.8 cd/lm
LEDs/each optic 4
Light colour/type White

Required components:




Light distribution files



LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.5 cd/lm
LEDs/each optic 9
Light colour/type White

Required components:








LED NVSxx19B/NVSxx19C

FWHM / FWTM Asymmetric
Efficiency 91 %
LEDs/each optic 1
Light colour/type White

Required components:





PRODUCT DATASHEET CA13509_STRADA-SQ-T2

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDIL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Poznan, Poland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy