

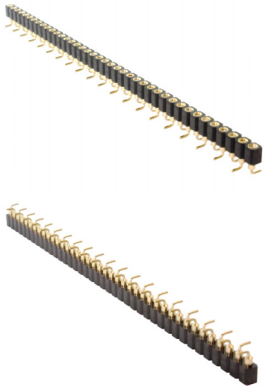
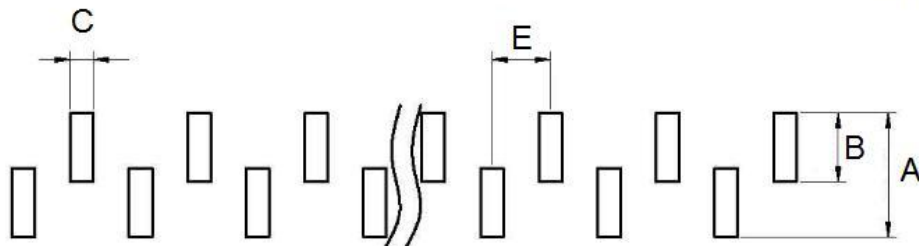


0.1" 40 pin Machine Pin Vertical Female Header SMT Gull-Wing

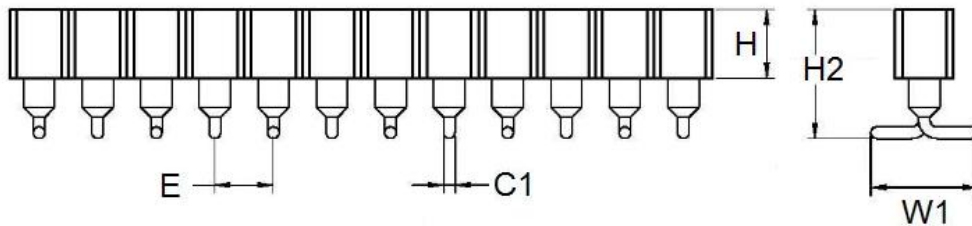

REF.	DIMENSIONS					
	mm			inches		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A		5.70				
B		3.20				
C		1.00				
C1		0.45			0.018	
E		2.54			0.100	
H		3.00				
H2		5.60				
L1		99.06			3.900	
L2		101.60			4.000	
W1		4.64				
W2		2.54				

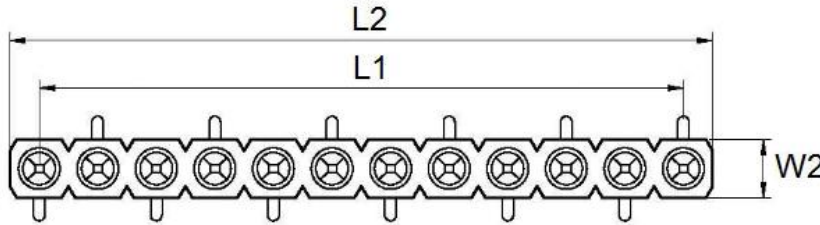

Recommended PCB Layout

SPECIFICATIONS

Plastic body construction: PA6T plastic (320°C melting point)

Pin construction: Gold plated (brass pin, with 1um gold over 50um nickel)

Operating temperature range: -40°C to +130°C

Reflow maximum temperature: +260°C