



- Electrical test:
1. 100% short, open, miss wire test
  2. Conduct resistance: 10 Ohm(max)
  3. Insulation resistance: 10Mohm(mh)
  4. Dielectric test: DC 300V

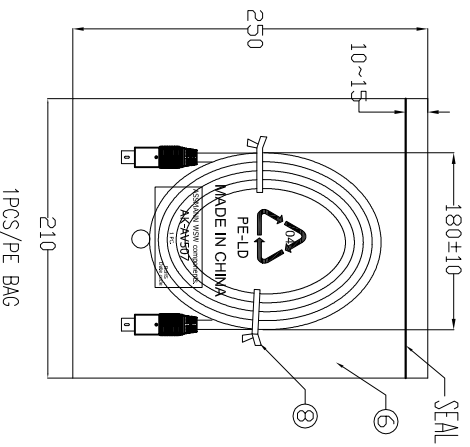

⑧	TIE	2	BLACK L=120mm
⑦	PE BAG	1/10	CLEAR SIZE: 430*480*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑥	PE BAG	1	CLEAR SIZE: 210*250*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑤	OUT JACKET	6.35g	PVC 70P COLOR BLACK
④	IN JACKET	4.2g	CLARITY LDPE
③	TUBE	4	HEAT SHRINK TUBE BLACK OD3.0*7MM
		6	HEAT SHRINK TUBE BLACK OD1.5*8MM
②	CONN	2set	MINDIN 4PIN MALE G/F S-VHS SHELL-OD12.0mm.
①	CABLE	1	UL2835 (30#*1COAX+S)*2C+AL/MY+D.W(7/0.12TC) OD7.0mm JACKET COLOR BLACK

**RoHS compliant**

Unit: mm

Scale	Free	Customer-No.	
TOLERANCE		Drawn	20.02.2017 Amy
		Approved	20.02.2017 Amy
DIM	TOL	ASSMANN WSW-No. AK-AV507	
Angle	TOL	Drawing-No. ASS 7862 CA	
		Replace Sheet	
Id.	Modification	rev00	
①	Drawn	20.02.2017 Amy	
Date	Name	Date Name	
20.02.2017	Amy	20.02.2017	Amy

**ASSMANN**  
WSW components

1 2 3 4 5 6 7

A B C D E F G H