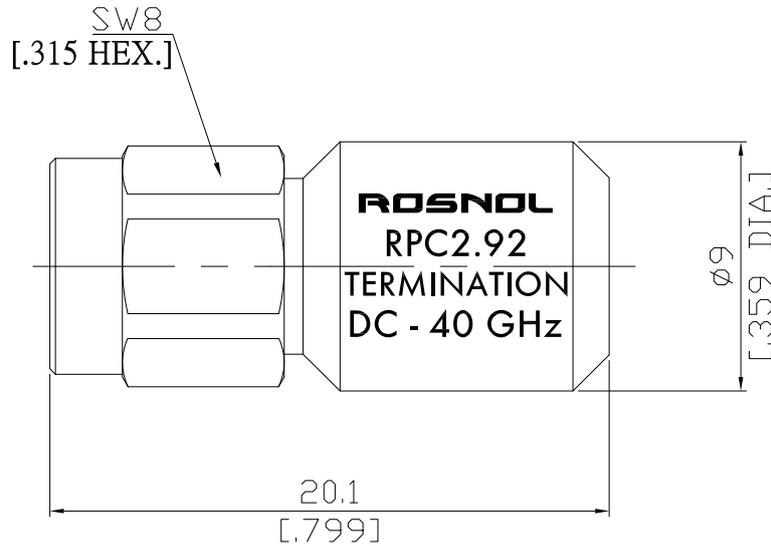


RPC2.92 Termination Plug
T-K15-40G1WB/9XX


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

 According to MIL-C-39012; MIL-STD-348A/323
 Mechanically compatible with SMA and 3.5 mm

Electrical Data

 Impedance 50 Ω
 Frequency DC to 40 GHz
 VSWR (Return Loss) ≤ 1.20 (≥ 20.8 dB)
 Power rating (Watt) 1 W

Mechanical Data

 Coupling mechanisms Screw-lock
 Weight N/A

Environmental Data

 Temperature range -55°C to +125°C
 RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PS	
Coupling nut	Stainless Steel	Passivated

Packing

Single