


Adaptor Jack / Jack
HN jack (female) / HN jack (female)

AD-HN2HN25A/03-03

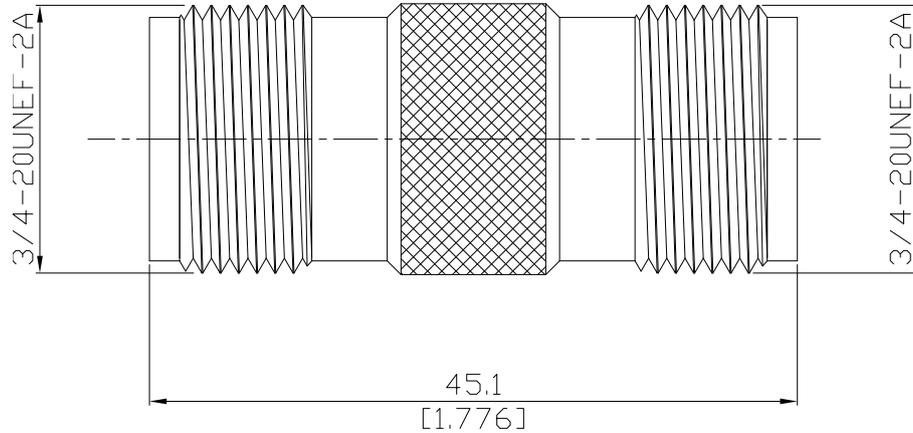

All dimensions are in mm [inch]
Tolerances according to DIN ISO 2768-mH

Interface

According to MIL-C-3643;MIL-STD-348A/317

Electrical Data

Impedance 50 Ω
Frequency DC to 4 GHz

Mechanical Data

Coupling mechanisms Screw-lock
Weight 0.1125 kg

Environmental Data

Temperature range -65°C to +165°C
RoHS compliant

Material And Plating

Piece Parts (HN)	Material	Plating
Centre contact	Brass	Silver
Body	Brass	Nickel
Insulator	PTFE	

Piece Parts (HN)	Material	Plating
Centre contact	Brass	Silver
Body	Brass	Nickel
Insulator	PTFE	

Packing

Single or 100