


Adaptor Jack/Jack
MHV jack (female) / MHV jack (female)

AD-MV2MV25A/H3-H3

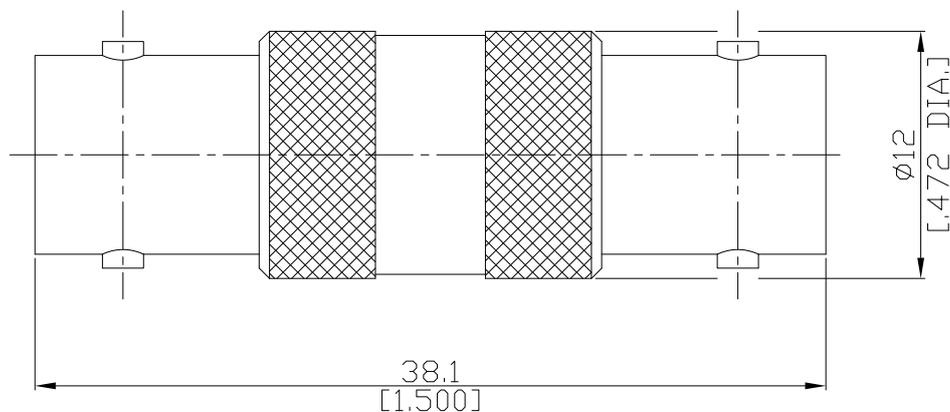

All dimensions are in mm [inch]
Tolerances according to DIN ISO 2768-mH

Interface

According to MIL-C-39012;MIL-STD-348A/303

Electrical Data

Impedance 50 Ω
Frequency DC to 300 MHz

Mechanical Data

Coupling mechanisms Bayonet-lock
Weight 0.0119 kg

Environmental Data

Temperature range -65°C to +165°C
RoHS compliant

Material And Plating

Piece Parts (MHV)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	

Piece Parts (MHV)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	

Packing

Single or 100