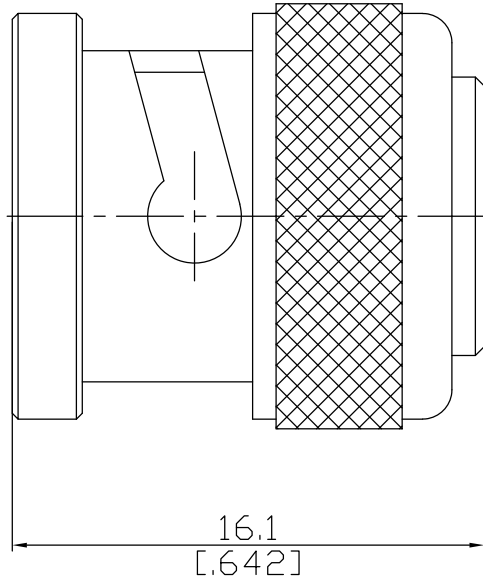


BNC SHORT
BNC plug (male)
BNC1AS50-1610A/133


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to MIL-C-39012;MIL-STD-348A/310

Electrical Data

 Impedance 50 Ω
 Frequency DC to 4 GHz

Mechanical Data

 Coupling mechanisms Screw-lock
 Weight N/A

Environmental Data

 Temperature range -65°C to +165°C
 RoHS compliant

Material And Plating

| Piece Parts (SMA) | Material | Plating |
|-------------------|-----------------|----------------------------------|
| Centre contact | Brass | Gold plating(Nickel underplated) |
| Body | Brass | Nickel |
| Gasket | Silicone Rubber | |
| Coupling nut | Brass | Nickel |

Packing

Single or 100