


## 2.92mm PCB End Launch Jack

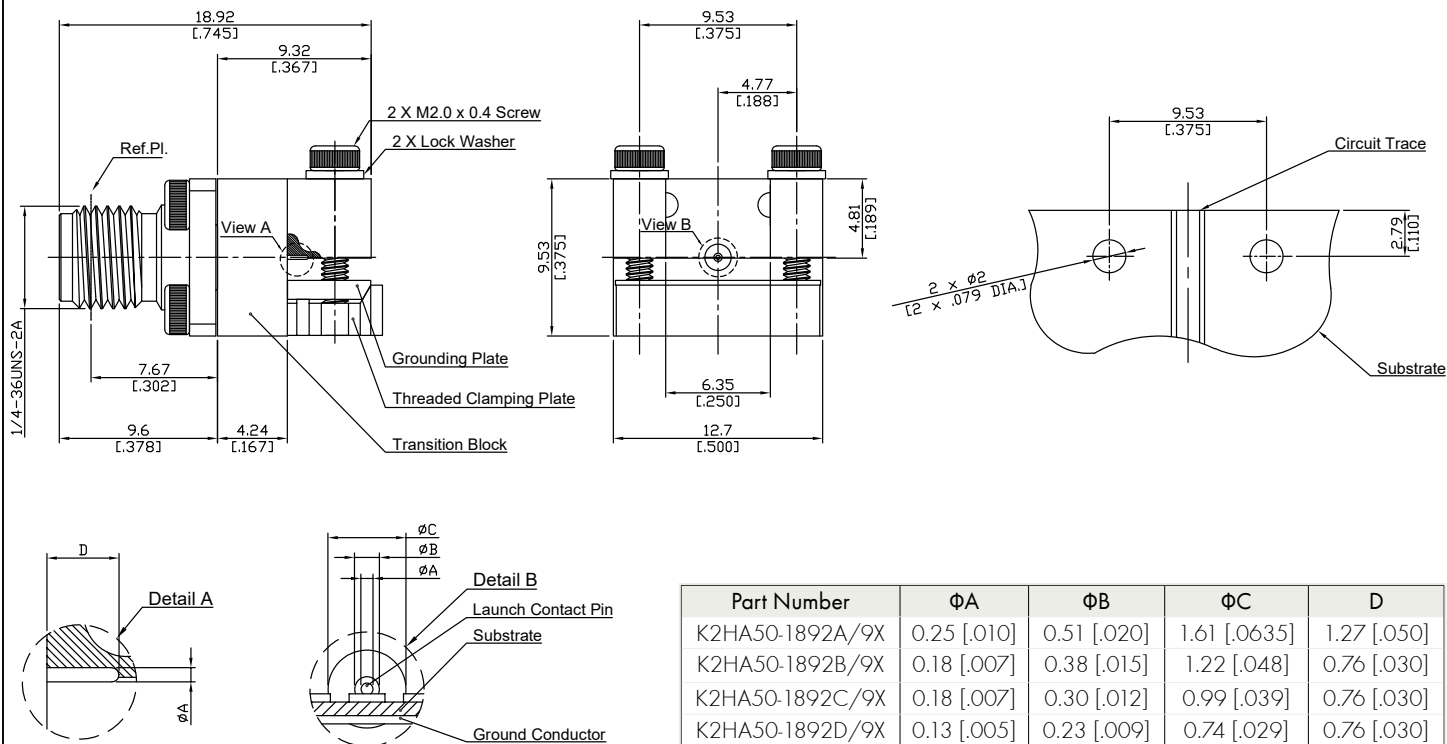

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

According to MIL-STD-348A/323; IEC 61169-35; IEEE Std 287-2007

### Electrical Data

Impedance 50 Ω  
Frequency DC to 40 GHz

### Mechanical Data

Board mounting type End Launch

### Environmental Data

Temperature range -55°C to +135°C  
RoHS compliant

### Material And Plating

Connector parts (2.92mm Connector)	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PEI	
Connector parts (Transition Block)	Material	Plating
Launch Pin	Beryllium Copper	Gold plating (Nickel underplated)
Transition Block	Brass	Nickel
Transition Block Insulator	PTFE	

### Packing

Single

### Related Document

Mounting Dimension MD 108