





Texas INSTRUMENTS

SN54ACT240, SN74ACT240 SCAS515G - JUNE 1995 - REVISED MARCH 2024

## SNx4ACT240 Octal Buffers or Drivers with 3-State Outputs

### 1 Features

- Operation of 4.5V to 5.5V V  $_{\rm CC}$
- Inputs accept voltages to 5.5V
- Maximum t<sub>pd</sub> of 8.5ns at 5V
- Inputs are TTL-compatible

### 2 Applications

Handset: smartphone •

10E

1A2

1A3

2

6

8 1A4 -


- Network switch
- Health and fitness or wearables

### **3 Description**

These octal buffers and line drivers are designed specifically to improve the performance and density of 3-state memory address drivers, clock drivers, and bus-oriented receivers and transmitters.

Package Information								
PART NUMBER	PACKAGE <sup>(1)</sup>	PACKAGE SIZE <sup>(2)</sup>	BODY SIZE <sup>(3)</sup>					
	N (PDIP, 20)	24.33mm × 9.4mm	24.33mm × 6.35mm					
	DGS (VSSOP, 20)	5.1mm × 4.9mm	5.1mm × 3mm					
	DW (SOIC, 20)	12.8mm × 10.3mm	12.80mm × 7.50mm					
SN74ACT240	NS (SOP, 20)	12.6mm × 7.8mm	12.6mm × 5.3mm					
	DB (SSOP, 20)	7.2mm × 7.8mm	7.2mm × 5.3mm					
	PW (TSSOP, 20)	6.5mm × 6.4mm	6.5mm × 4.4mm					
	RKS (VQFN, 20)	4.5mm × 2.5mm	4.5mm × 2.5mm					

- For more information, see Section 10. (1)
- (2) The package size (length × width) is a nominal value and includes pins, where applicable.
- The body size (length × width) is a nominal value and does (3) not include pins.

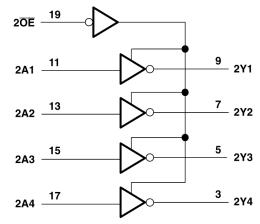

Logic Diagram (Positive Logic)

18 1Y1

<u>16</u> 1Y2

<u>14</u> 1Y3

12 1Y4





## **Table of Contents**


1 Features	1
2 Applications	1
3 Description	
4 Pin Configuration and Functions	
5 Specifications	5
5.1 Absolute Maximum Ratings	
5.2 Recommended Operating Conditions	
5.3 Thermal Information	5
5.4 Electrical Characteristics	6
5.5 Switching Characteristics	6
5.6 Operating Characteristics	
6 Parameter Measurement Information	
7 Detailed Description	<mark>8</mark>

7.1 Overview	8
7.2 Functional Block Diagram	8
7.3 Feature Description.	
7.4 Device Functional Modes	
8 Device and Documentation Support	
8.1 Receiving Notification of Documentation Updates	
8.2 Support Resources	
8.3 Trademarks	
8.4 Electrostatic Discharge Caution	9
8.5 Glossary	
9 Revision History	
10 Mechanical, Packaging, and Orderable	
Information	9




### **4** Pin Configuration and Functions


1 <del>0E</del>	<b>d</b> 1	$O_{20}$	] v <sub>cc</sub>
1A1	2	19	] 20E
2Y4	<b>[</b> ] 3	18	] 1Y1
1A2	_	17	2A4
2Y3	_	16	] 1Y2
1A3	_	15	] 2A3
2Y2	<b>[</b> 7	14	] 1Y3
1A4	8]	13	2A2
2Y1	<b>[</b> 9	12	] 1Y4
GND	[ 10	11	] 2A1

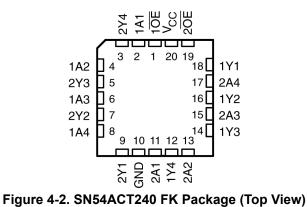

#### Figure 4-1. SN54ACT240 J or W Package; SN74ACT240 DB, DGS, DW, N, NS, or PW Package,

(Top View)





#### Table 4-1. Pin Functions

I	PIN	TYPE <sup>(1)</sup>	DESCRIPTION
NAME	NO.		DESCRIPTION
1 <del>0</del> E	1	I	Output enable 1
1A1	2	I	1A1 input
2Y4	3	0	2Y4 output
1A2	4	I	1A2 input
2Y3	5	0	2Y3 output
1A3	6	I	1A3 input
2Y2	7	0	2Y2 output
1A4	8	I	1A4 input
2Y1	9	0	2Y1 output
GND	10	_	Ground pin
2A1	11	I	2A1 input
1Y4	12	0	1Y4 output
2A2	13	I	2A2 input
1Y3	14	0	1Y3 output
2A3	15	I	2A3 input
1Y2	16	0	1Y2 output
2A4	17	I	2A4 input
1Y1	18	0	1Y1 output

Copyright © 2024 Texas Instruments Incorporated

#### SN54ACT240, SN74ACT240 SCAS515G – JUNE 1995 – REVISED MARCH 2024



#### Table 4-1. Pin Functions (continued)

P	IN	TYPE <sup>(1)</sup>	DESCRIPTION				
NAME	NO.		DESCRIPTION				
2 <del>0E</del>	19	I	Output enable 2				
VCC	20	—	Power pin				
Thermal pad <sup>(2)</sup> —		_	The thermal pad can be connect to GND or left floating. Do not connect to any other signal or supply.				

(1) Signal Types: I = Input, O = Output, I/O = Input or Output

(2) RKS package only



### **5** Specifications

#### 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) (1)

			MIN	MAX	UNIT
V <sub>cc</sub>	Supply voltage range		-0.5	7	V
V <sub>I</sub> <sup>(2)</sup>	Input voltage range		-0.5	V <sub>CC</sub> +0.5	V
V <sub>0</sub> <sup>(2)</sup>	Output voltage range		-0.5	V <sub>CC</sub> +0.5	V
I <sub>IK</sub>	Input clamp current	$(V_{I} < 0 \text{ or } V_{I} > V_{CC})$		±20	mA
I <sub>OK</sub>	Output clamp current	$(V_O < 0 \text{ or } V_O > V_{CC})$		±20	mA
I <sub>O</sub>	Continuous output current	$(V_{O} = 0 \text{ or } V_{CC})$		±50	mA
	Continuous current through $V_{CC}$ or GND			±200	mA
T <sub>stg</sub>	Storage temperature range		-65	150	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

The input and output voltage ratings may be exceeded if the input and output current ratings are observed. (2)

### 5.2 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

		SN54A	CT240	SN74ACT240	
		MIN	MAX	MIN MAX	
V <sub>CC</sub>	Supply voltage	4.5	5.5	5.5	V
V <sub>IH</sub>	High-level input voltage	2			V
V <sub>IL</sub>	Low-level input voltage		0.8	0.8	V
VI	Input voltage	0	V <sub>CC</sub>	V <sub>CC</sub>	V
Vo	Output voltage	0	V <sub>CC</sub>	V <sub>CC</sub>	V
I <sub>OH</sub>	High-level output current		-24	-24	mA
I <sub>OL</sub>	Low-level output current		24	24	mA
Δt/Δv	Input transition rise or fall rate		8	8	ns/V
T <sub>A</sub>	Operating free-air temperature	-55	125	85	°C

(1) All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

#### 5.3 Thermal Information

THERMAL METRIC <sup>(1)</sup>		DB (SSOP)	DGS (VSSOP)	DW (SOIC)	N (PDIP)	NS (SOP)	PW (TSSOP)	RKS (VQFN)	UNIT
		20 PINS							
$R_{\thetaJA}$	Junction-to-ambient thermal resistance <sup>(2)</sup>	70	123.5	101.2	69	60	126.2	68	°C/W

For more information about traditional and new thermal metrics, see the IC Package Thermal Metrics application report, SPRA953. (1)

(2) The package thermal impedance is calculated in accordance with JESD 51-7.



#### **5.4 Electrical Characteristics**

		V	1	Г <sub>А</sub> = 25°С		SN54ACT240		SN74ACT240		UNIT
PARAMETER	TEST CONDITIONS	V <sub>cc</sub>	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
	1 - 50	4.5 V	4.4	4.49		4.4		4.4		
	I <sub>OH</sub> = –50 μA	5.5 V	5.4	5.49		5.4		5.4		
V	$1 - 24 m \Lambda$	4.5 V	3.86			3.7		3.76		V
V <sub>OH</sub>	I <sub>OH</sub> = –24 mA	5.5 V	4.86			4.7		4.76		v
	$I_{OH} = -50 \text{ mA}^{(1)}$	5.5 V				3.85				
	$I_{OH} = -75 \text{ mA}^{(1)}$	5.5 V						3.85		
	I <sub>OL</sub> = 50 μA	4.5 V		0.001	0.1		0.1		0.1	v
	Ι <sub>ΟΓ</sub> – 50 μΑ	5.5 V		0.001	0.1		0.1		0.1	
V	I <sub>OL</sub> = 24 mA	4.5 V			0.36		0.5		0.44	
V <sub>OL</sub>	1 <sub>0L</sub> - 24 MA	5.5 V			0.36		0.5		0.44	
	$I_{OL} = 50 \text{ mA}^{(1)}$	5.5 V					1.65			
	$I_{OL} = 75 \text{ mA}^{(1)}$	5.5 V							1.65	
I <sub>OZ</sub>	V <sub>O</sub> = V <sub>CC</sub> or GND	5.5 V			±0.25		±5		±2.5	μA
I <sub>I</sub>	V <sub>I</sub> = V <sub>CC</sub> or GND	5.5 V			±0.1		±1		±1	μA
Icc	$V_{I} = V_{CC} \text{ or } \qquad I_{O} = 0$ GND,	5.5 V			4		80		40	μA
ΔI <sub>CC</sub> <sup>(2)</sup>	One input at 3.4 V, Other inputs at GND or $V_{CC}$	5.5 V		0.6			1.6		1.5	mA
Ci	V <sub>I</sub> = V <sub>CC</sub> or GND	5 V		2.5						pF
Co	$V_{I} = V_{CC}$ or GND	5 V		8						pF

over recommended operating free-air temperature range (unless otherwise noted)

(1) Not more than one output should be tested at a time, and the duration of the test should not exceed 2 ms.

(2) This is the increase in supply current for each input that is at one of the specified TTL voltage levels, rather than 0 V or  $V_{CC}$ .

#### **5.5 Switching Characteristics**

over recommended operating free-air temperature range,  $V_{CC} = 5 V \pm 0.5 V$  (unless otherwise noted) (see Load Circuit and Voltage Waveforms)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	Т	T <sub>A</sub> = 25°C			T240	SN74ACT240		UNIT
FARAMETER		10 (001201)	MIN	ТҮР	MAX	MIN	MAX	MIN	MAX	UNIT
t <sub>PLH</sub>	٨	V	1.5	6	8.5	1	9.5	1.5	9.5	20
t <sub>PHL</sub>	A	ř	1.5	5.5	7.5	1	9	1.5	8.5	ns
t <sub>PZH</sub>	OE	V	1.5	7	8.5	1	10	1	9.5	20
t <sub>PZL</sub>		T	2	7	9.5	1	11.5	1.5	10.5	ns
t <sub>PHZ</sub>	ŌĒ	×	2	8	9.5	1	11	2	10.5	20
t <sub>PLZ</sub>		r	2.5	6.5	10	1	11.5	2	10.5	ns


#### **5.6 Operating Characteristics**

 $V_{CC}$  = 5 V,  $T_A$  = 25°C

	PARAMETER	TEST CONDITIONS	TYP	UNIT
C <sub>pd</sub>	Power dissipation capacitance per buffer/driver	$C_L = 50 \text{ pF}, \text{ f} = 1 \text{ MHz}$	45	pF



#### **6** Parameter Measurement Information

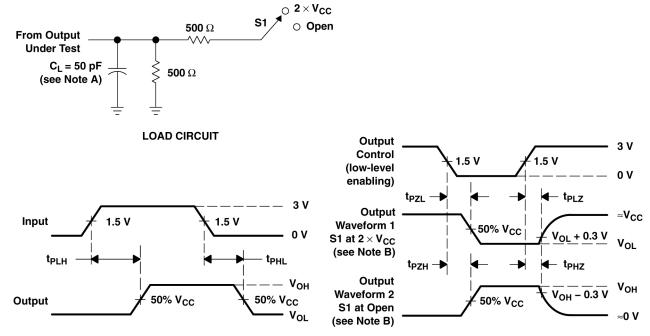

#### **VOLTAGE WAVEFORMS**

**VOLTAGE WAVEFORMS** 

- A. C<sub>L</sub> includes probe and jig capacitance.
- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz, Z<sub>0</sub> = 50  $\Omega$ , t<sub>r</sub>  $\leq$  2.5 ns, t<sub>f</sub>  $\leq$  2.5 ns.
- D. The outputs are measured one at a time with one input transition per measurement.

#### Figure 6-1. Load Circuit and Voltage Waveforms

TEST	S1
t <sub>PLH</sub> /t <sub>PHL</sub>	Open
t <sub>PLZ</sub> /t <sub>PZL</sub>	$2 \times V_{CC}$
t <sub>PHZ</sub> /t <sub>PZH</sub>	Open



### 7 Detailed Description

### 7.1 Overview

The SNx4ACT240 devices are organized as two 4-bit buffers or drivers with separate output-enable ( $\overline{OE}$ ) inputs. When  $\overline{OE}$  is low, the device passes inverted data from the A inputs to the Y outputs. When  $\overline{OE}$  is high, the outputs are in the high-impedance state.

To put the device in the high-impedance state during power up or power down, tie  $\overline{OE}$  to V<sub>CC</sub> through a pullup resistor; the current-sinking capability of the driver determines the minimum value of the resistor.

#### 7.2 Functional Block Diagram

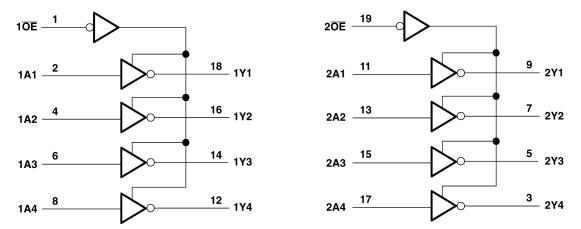


Figure 7-1. Logic Diagram (Positive Logic)

#### 7.3 Feature Description

#### 7.3.1 Balanced CMOS Push-Pull Outputs

This device includes balanced CMOS push-pull outputs. The term *balanced* indicates that the device can sink and source similar currents. The drive capability of this device may create fast edges into light loads, so routing and load conditions should be considered to prevent ringing. Additionally, the outputs of this device are capable of driving larger currents than the device can sustain without being damaged. It is important to limit the output power of the device to avoid damage due to overcurrent. The electrical and thermal limits defined in the *Absolute Maximum Ratings* must be followed at all times.

Unused push-pull CMOS outputs must be left disconnected.

#### 7.4 Device Functional Modes

Table 7-1.1 unedoin Table (Each Buller)								
INPUTS	OUTPUT							
ŌĒ	Α	Y						
L	Н	L						
L	L	Н						
Н	Х	Z						

Table 7-1. Function	Table (Ea	ch Buffer)
---------------------	-----------	------------



### 8 Device and Documentation Support

#### 8.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

#### 8.2 Support Resources

TI E2E<sup>™</sup> support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

#### 8.3 Trademarks

TI E2E<sup>™</sup> is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

#### 8.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

#### 8.5 Glossary

TI Glossary This glossary lists and explains terms, acronyms, and definitions.

#### **9 Revision History**

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

С	Changes from Revision F (November 2023) to Revision G (March 2024)	Page
•	Added DGS and PW packages to Device Information table, Pin Configuration and Functions section and	l
	Thermal Information table	1
•	Added body size to Device Information table	1
•		

С	hanges from Revision E (November 2023) to Revision F (March 2024)	Page
•	Updated R $\theta$ JA values: DW = 58 to 101.2, PW = 83 to 126.2, all values in °C/W	5

#### 10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.



### PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
5962-8775901M2A	ACTIVE	LCCC	FK	20	55	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962- 8775901M2A SNJ54ACT 240FK	Samples
5962-8775901MRA	ACTIVE	CDIP	J	20	20	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-8775901MR A SNJ54ACT240J	Samples
5962-8775901MSA	ACTIVE	CFP	W	20	25	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-8775901MS A SNJ54ACT240W	Samples
SN74ACT240DBR	ACTIVE	SSOP	DB	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AD240	Samples
SN74ACT240DGSR	ACTIVE	VSSOP	DGS	20	5000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	T240	Samples
SN74ACT240DWR	ACTIVE	SOIC	DW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ACT240	Samples
SN74ACT240N	ACTIVE	PDIP	N	20	20	RoHS & Green	NIPDAU	N / A for Pkg Type	-40 to 85	SN74ACT240N	Samples
SN74ACT240NSR	ACTIVE	SO	NS	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ACT240	Samples
SN74ACT240PW	OBSOLETE	TSSOP	PW	20		TBD	Call TI	Call TI	-40 to 85	AD240	
SN74ACT240PWR	ACTIVE	TSSOP	PW	20	2000	RoHS & Green	NIPDAU   SN	Level-1-260C-UNLIM	-40 to 85	AD240	Samples
SN74ACT240PWRG4	ACTIVE	TSSOP	PW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AD240	Samples
SN74ACT240RKSR	ACTIVE	VQFN	RKS	20	3000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ACT240	Samples
SNJ54ACT240FK	ACTIVE	LCCC	FK	20	55	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962- 8775901M2A SNJ54ACT 240FK	Samples
SNJ54ACT240J	ACTIVE	CDIP	J	20	20	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-8775901MR A SNJ54ACT240J	Samples
SNJ54ACT240W	ACTIVE	CFP	W	20	25	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-8775901MS A SNJ54ACT240W	Samples



(1) The marketing status values are defined as follows:
 ACTIVE: Product device recommended for new designs.
 LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
 NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
 PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
 OBSOLETE: TI has discontinued the production of the device.

<sup>(2)</sup> RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN54ACT240, SN74ACT240 :

• Catalog : SN74ACT240

- Automotive : SN74ACT240-Q1, SN74ACT240-Q1
- Military : SN54ACT240



www.ti.com

NOTE: Qualified Version Definitions:

- Catalog TI's standard catalog product
- Automotive Q100 devices qualified for high-reliability automotive applications targeting zero defects
- Military QML certified for Military and Defense Applications

www.ti.com

Texas

STRUMENTS

#### TAPE AND REEL INFORMATION





#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal												
Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74ACT240DBR	SSOP	DB	20	2000	330.0	16.4	8.2	7.5	2.5	12.0	16.0	Q1
SN74ACT240DGSR	VSSOP	DGS	20	5000	330.0	16.4	5.4	5.4	1.45	8.0	16.0	Q1
SN74ACT240DWR	SOIC	DW	20	2000	330.0	24.4	10.9	13.3	2.7	12.0	24.0	Q1
SN74ACT240DWR	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1
SN74ACT240NSR	SO	NS	20	2000	330.0	24.4	8.4	13.0	2.5	12.0	24.0	Q1
SN74ACT240PWR	TSSOP	PW	20	2000	330.0	16.4	6.95	7.0	1.4	8.0	16.0	Q1
SN74ACT240PWR	TSSOP	PW	20	2000	330.0	16.4	6.95	7.0	1.4	8.0	16.0	Q1
SN74ACT240PWRG4	TSSOP	PW	20	2000	330.0	16.4	6.95	7.0	1.4	8.0	16.0	Q1
SN74ACT240RKSR	VQFN	RKS	20	3000	180.0	12.4	2.8	4.8	1.2	4.0	12.0	Q1



www.ti.com

## PACKAGE MATERIALS INFORMATION

25-Sep-2024



All dimensions are nominal							
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74ACT240DBR	SSOP	DB	20	2000	356.0	356.0	35.0
SN74ACT240DGSR	VSSOP	DGS	20	5000	353.0	353.0	32.0
SN74ACT240DWR	SOIC	DW	20	2000	356.0	356.0	45.0
SN74ACT240DWR	SOIC	DW	20	2000	367.0	367.0	45.0
SN74ACT240NSR	SO	NS	20	2000	367.0	367.0	45.0
SN74ACT240PWR	TSSOP	PW	20	2000	353.0	353.0	32.0
SN74ACT240PWR	TSSOP	PW	20	2000	356.0	356.0	35.0
SN74ACT240PWRG4	TSSOP	PW	20	2000	356.0	356.0	35.0
SN74ACT240RKSR	VQFN	RKS	20	3000	210.0	185.0	35.0

### TEXAS INSTRUMENTS

www.ti.com

25-Sep-2024

### TUBE



### - B - Alignment groove width

#### \*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	Τ (μm)	B (mm)
5962-8775901M2A	FK	LCCC	20	55	506.98	12.06	2030	NA
5962-8775901MSA	W	CFP	20	25	506.98	26.16	6220	NA
SN74ACT240N	N	PDIP	20	20	506	13.97	11230	4.32
SNJ54ACT240FK	FK	LCCC	20	55	506.98	12.06	2030	NA
SNJ54ACT240W	W	CFP	20	25	506.98	26.16	6220	NA

W (R-GDFP-F20)

CERAMIC DUAL FLATPACK



- NOTES: A. All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice. В.
  - C. This package can be hermetically sealed with a ceramic lid using glass frit.
    D. Index point is provided on cap for terminal identification only.
    E. Falls within Mil-Std 1835 GDFP2-F20



# **PW0020A**



## **PACKAGE OUTLINE**

## TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M. 2. This drawing is subject to change without notice. 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



## PW0020A

# **EXAMPLE BOARD LAYOUT**

### TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



## PW0020A

# **EXAMPLE STENCIL DESIGN**

## TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



# **DB0020A**



## **PACKAGE OUTLINE**

SSOP - 2 mm max height

SMALL OUTLINE PACKAGE



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M. 2. This drawing is subject to change without notice. 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-150.



# DB0020A

# **EXAMPLE BOARD LAYOUT**

## SSOP - 2 mm max height

SMALL OUTLINE PACKAGE



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



# DB0020A

# **EXAMPLE STENCIL DESIGN**

## SSOP - 2 mm max height

SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



# **RKS 20**

2.5 x 4.5, 0.5 mm pitch

# **GENERIC PACKAGE VIEW**

### VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.






# **RKS0020A**



## **PACKAGE OUTLINE**

### VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

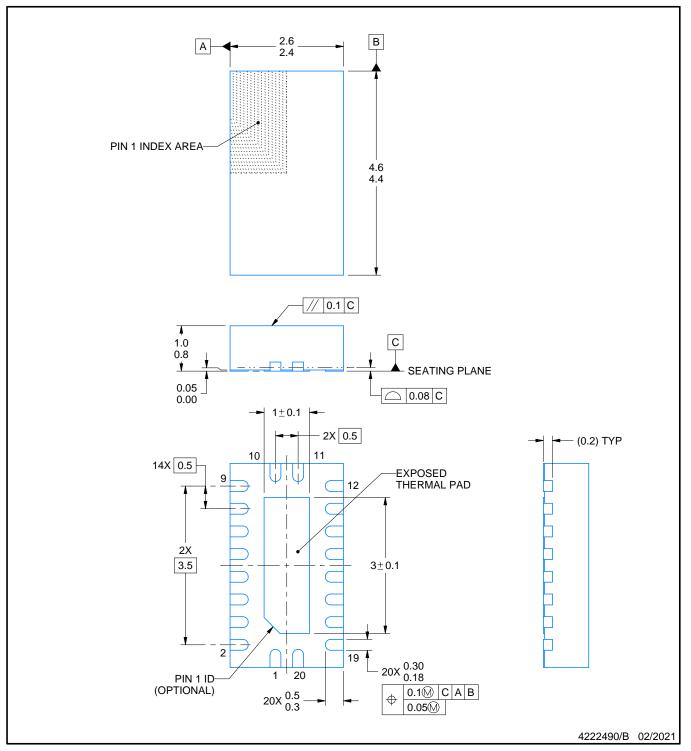

#### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M. 2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.




# **RKS0020A**

# **EXAMPLE BOARD LAYOUT**

### VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

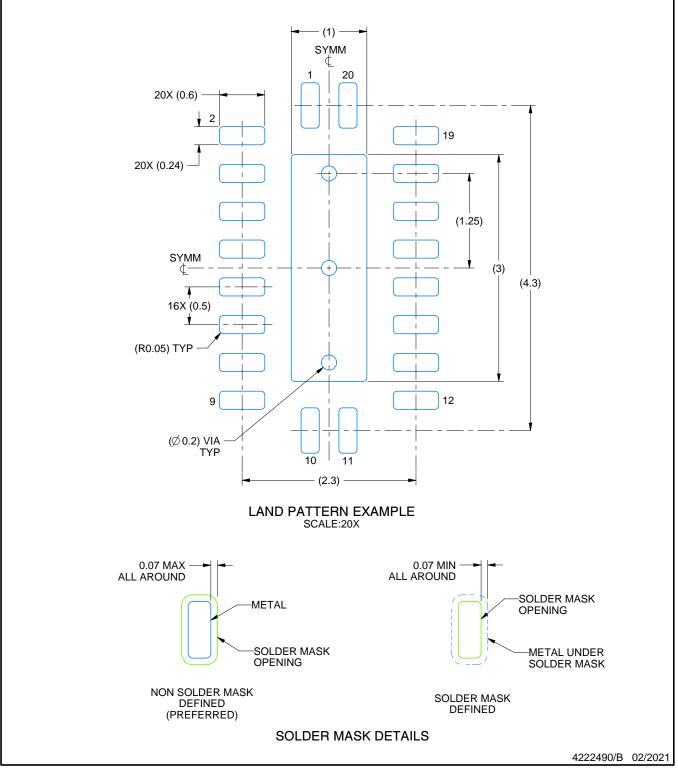

NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).

5. Vias are optional depending on application, refer to device data sheet. If some or all are implemented, recommended via locations are shown.




# **RKS0020A**

# **EXAMPLE STENCIL DESIGN**

### VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

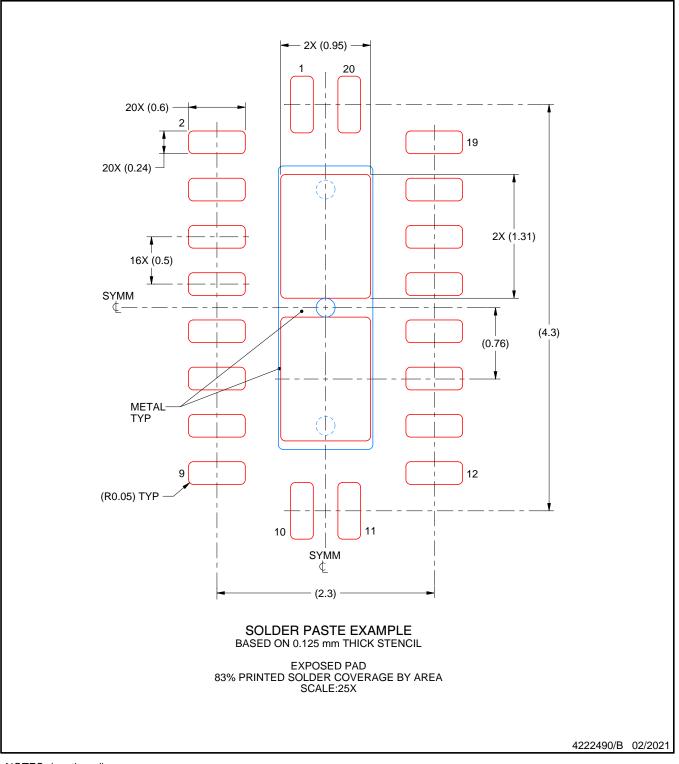

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



### MECHANICAL DATA

#### PLASTIC SMALL-OUTLINE PACKAGE

#### 0,51 0,35 ⊕0,25⊛ 1,27 8 14 0,15 NOM 5,60 8,20 5,00 7,40 $\bigcirc$ Gage Plane ₽ 0,25 7 1 1,05 0,55 0-10 Δ 0,15 0,05 Seating Plane — 2,00 MAX 0,10PINS \*\* 14 16 20 24 DIM 10,50 10,50 12,90 15,30 A MAX A MIN 9,90 9,90 12,30 14,70 4040062/C 03/03

NOTES: A. All linear dimensions are in millimeters.

NS (R-PDSO-G\*\*)

**14-PINS SHOWN** 

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



J (R-GDIP-T\*\*) 14 LEADS SHOWN

CERAMIC DUAL IN-LINE PACKAGE



NOTES: A. All linear dimensions are in inches (millimeters).

- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

## FK 20

### 8.89 x 8.89, 1.27 mm pitch

## **GENERIC PACKAGE VIEW**

### LCCC - 2.03 mm max height

LEADLESS CERAMIC CHIP CARRIER

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.





## N (R-PDIP-T\*\*)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



NOTES:

- A. All linear dimensions are in inches (millimeters).B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- $\triangle$  The 20 pin end lead shoulder width is a vendor option, either half or full width.



# **DW0020A**



## **PACKAGE OUTLINE**

### SOIC - 2.65 mm max height

SOIC



NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M. 2. This drawing is subject to change without notice. 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
- 5. Reference JEDEC registration MS-013.



## DW0020A

# **EXAMPLE BOARD LAYOUT**

### SOIC - 2.65 mm max height

SOIC



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



## DW0020A

# **EXAMPLE STENCIL DESIGN**

### SOIC - 2.65 mm max height

SOIC



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2024, Texas Instruments Incorporated