

Quad D Flip-Flop with Common Clock and Reset

High-Performance Silicon-Gate CMOS

MC74HC175A

The MC74HC175A is identical in pinout to the LS175. The device inputs are compatible with standard CMOS outputs; with pullup resistors, they are compatible with LSTTL outputs.

This device consists of four D flip-flops with common Reset and Clock inputs, and separate D inputs. Reset (active-low) is asynchronous and occurs when a low level is applied to the Reset input. Information at a D input is transferred to the corresponding Q output on the next positive going edge of the Clock input.

Features

- Output Drive Capability: 10 LSTTL Loads
- Outputs Directly Interface to CMOS, NMOS, and TTL
- Operating Voltage Range: 2.0 to 6.0 V
- Low Input Current: 1 μA
- High Noise Immunity Characteristic of CMOS Devices
- In Compliance with the Requirements Defined by JEDEC Standard No. 7 A
- Chip Complexity 166 FETs or 41.5 Equivalent Gates
- -Q Suffix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant







TSSOP-16 **DT SUFFIX CASE 948F**



MN SUFFIX CASE 485AW

MARKING DIAGRAMS







XXXXXXX = Specific Device Code

= Assembly Location

WL, L = Wafer Lot = Year WW, W = Work Week G or ■ = Pb-Free Package

(Note: Microdot may be in either location)

ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 7 of this data sheet.




Figure 1. Pin Assignment

FUNCTION TABLE

Inputs			Out	puts
Reset	Clock	D	Q	Q
L	Х	Х	L	Н
Н	_	Н	Н	L
Н	_	L	L	Н
Н	L	Χ	No Cl	nange

CLOCK 9 - Q0 3 – Q0 - Q1 INVERTING D0 <u>4</u> 6 Q1 AND 10 Q2 NONINVERTING DATA 11 Q2 OUTPUTS D2 <u>12</u> **INPUTS** 15 Q3 14 Q3 D3 <u>13</u> RESET -PIN 16 = V_{CC} PIN 8 = GND

Figure 2. Logic Diagram

MAXIMUM RATINGS

Symbol	Parameter		Value	Unit
V _{CC}	DC Supply Voltage		-0.5 to +6.5	V
V _{IN}	DC Input Voltage		-0.5 to V _{CC} +0.5	V
V _{OUT}	DC Output Voltage		-0.5 to V _{CC} +0.5	V
I _{IN}	DC Input Diode Current, per Pin		±20	mA
I _{OUT}	DC Output Diode Current, per Pin		±25	mA
I _{CC}	DC Supply Current, V _{CC} and GND Pins		±50	mA
I _{IK}	Input Clamp Current (V _{IN} < 0 or V _{IN} > V _{CC})		±20	mA
lok	Output Clamp Current (V _{OUT} < 0 or V _{OUT} > V _{CC})		±20	mA
T _{STG}	Storage Temperature Range		-65 to +150	°C
T _L	Lead Temperature, 1 mm from Case for 10 Seconds		260	°C
T _J	Junction Temperature Under Bias		+150	°C
Αζθ	Thermal Resistance (Note 1)	SOIC-16 QFN16 TSSOP-16	126 118 159	°C/W
P _D	Power Dissipation in Still Air at 25°C	SOIC-16 QFN16 TSSOP-16	995 1062 787	mW
MSL	Moisture Sensitivity		Level 1	-
F _R	Flammability Rating	Oxygen Index: 28 to 34	UL 94 V-0 @ 0.125 in.	-
V _{ESD}	ESD Withstand Voltage (Note 2)	Human Body Model Charged Device Model	2000 N/A	V

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. Measured with minimum pad spacing on an FR4 board, using 76mm-by-114mm, 2-ounce copper trace no air flow per JESD51-7.
- 2. HBM tested to EIA / JESD22-A114-A. CDM tested to JESD22-C101-A. JEDEC recommends that ESD qualification to EIA/JESD22-A115A (Machine Model) be discontinued.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
V _{CC}	DC Supply Voltage	2.0	6.0	V
V _{in} , V _{out}	DC Input Voltage, Output Voltage (Note 3)	0	V _{CC}	V
T _A	Operating Temperature, All Package Types	-55	+125	°C
t _r , t _f	Input Rise and Fall Time $V_{CC} = 2.0 \ V_{CC} = 3.0 \ V_{CC} = 4.5 \ V_{CC} = 6.0 \ V_{CC} = $	0 0	1000 600 500 400	ns

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

3. Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or V_{CC}). Unused outputs must be left open.

DC ELECTRICAL CHARACTERISTICS

				Gu	aranteed Li	mit	
Symbol	Parameter	Test Conditions	v _{cc} v	– 55 to 25°C	≤ 85 °C	≤ 125°C	Unit
V _{IH}	Minimum High-Level Input Voltage	V_{out} = 0.1 V or V_{CC} – 0.1 V $ I_{out} \le 20 \mu A$	2.0 3.0 4.5 6.0	1.5 2.1 3.15 4.2	1.5 2.1 3.15 4.2	1.5 2.1 3.15 4.2	V
V _{IL}	Maximum Low-Level Input Voltage	V_{out} = 0.1 V or V_{CC} – 0.1 V $ I_{out} \le 20 \mu A$	2.0 3.0 4.5 6.0	0.5 0.9 1.35 1.80	0.5 0.9 1.35 1.80	0.5 0.9 1.35 1.80	V
V _{OH}	Minimum High-Level Output Voltage	$V_{in} = V_{IH} \text{ or } V_{IL}$ $ I_{out} \le 20 \mu\text{A}$	2.0 4.5 6.0	1.9 4.4 5.9	1.9 4.4 5.9	1.9 4.4 5.9	V
		$\begin{tabular}{l l l l l l l l l l l l l l l l l l l $	3.0 4.5 6.0	2.48 3.98 5.48	2.34 3.84 5.34	2.20 3.70 5.20	
V _{OL}	Maximum Low-Level Output Voltage	$V_{in} = V_{IH} \text{ or } V_{IL}$ $ I_{out} \le 20 \mu\text{A}$	2.0 4.5 6.0	0.1 0.1 0.1	0.1 0.1 0.1	0.1 0.1 0.1	٧
		$ \begin{aligned} V_{in} = V_{IH} \text{ or } V_{IL} & & I_{out} \leq 2.4 \text{ mA} \\ & & I_{out} \leq 4.0 \text{ mA} \\ & & I_{out} \leq 5.2 \text{ mA} \end{aligned} $	3.0 4.5 6.0	0.26 0.26 0.26	0.33 0.33 0.33	0.40 0.40 0.40	
I _{in}	Maximum Input Leakage Current	V _{in} = V _{CC} or GND	6.0	± 0.1	± 1.0	± 1.0	μΑ
I _{CC}	Maximum Quiescent Supply Current (per Package)	$V_{in} = V_{CC}$ or GND $I_{out} = 0 \mu A$	6.0	4	40	160	μΑ

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

AC ELECTRICAL CHARACTERISTICS


			Gu			
Symbol	Parameter	V _{CC}	– 55 to 25°C	≤ 85 °C	≤ 125°C	Unit
f _{max}	Maximum Clock Frequency (50% Duty Cycle) (Figures 3, 4)	2.0 3.0 4.5 6.0	6 10 30 35	4.8 8.0 24 28	4 6 20 24	MHz
t _{PLH} , t _{PHL}	Maximum Propagation Delay, Clock to Q or Q (Figures 3, 4)	2.0 3.0 4.5 6.0	150 75 26 22	190 90 32 28	225 110 38 33	ns
t _{PHL}	Maximum Propagation Delay, Reset to Q or Q (Figures 3, 5)	2.0 3.0 4.5 6.0	125 70 22 19	155 85 27 24	190 110 34 30	ns
t _{TLH} , t _{THL}	Maximum Output Transition Time, Any Output (Figures 3, 4)	2.0 3.0 4.5 6.0	75 27 15 13	95 32 19 16	110 36 22 19	ns
C _{in}	Maximum Input Capacitance	_	10	10	10	pF

		Typical @ 25°C, V _{CC} = 5.0 V	
C _{PD}	Power Dissipation Capacitance (Per Flip-Flop)*	35	pF

^{*}Used to determine the no-load dynamic power consumption: $P_D = C_{PD} V_{CC}^2 f + I_{CC} V_{CC}$.

TIMING REQUIREMENTS

			Guaranteed Limit			
Symbol	Parameter	V _{CC}	– 55 to 25°C	≤ 85 °C	≤ 125°C	Unit
t _{su}	Minimum Setup Time, Data to Clock (Figure 6)	2.0 3.0 4.5 6.0	100 45 20 17	125 65 25 21	150 85 30 26	ns
t _h	Minimum Hold Time, Clock to Data (Figure 6)	2.0 3.0 4.5 6.0	5 3 3 3	5 3 3 3	5 3 3 3	ns
t _{rec}	Minimum Recovery Time, Reset Inactive to Clock (Figure 5)	2.0 3.0 4.5 6.0	100 45 20 17	125 65 25 21	150 85 30 26	ns
t _w	Minimum Pulse Width, Clock (Figure 4)	2.0 3.0 4.5 6.0	80 45 16 14	100 65 20 17	120 85 24 20	ns
t _w	Minimum Pulse Width, Reset (Figure 5)	2.0 3.0 4.5 6.0	80 45 16 14	100 65 20 17	120 85 24 20	ns
t _r , t _f	Maximum Input Rise and Fall Times (Figure 4)	2.0 3.0 4.5 6.0	1000 600 500 400	1000 600 500 400	1000 600 500 400	ns




Test	Switch Position	CL	R _L
t _{PLH} / t _{PHL}	Open	50 pF	1 kΩ
t _{PLZ} / t _{PZL}	V _{CC}	1	
t _{PHZ} / t _{PZH}	GND		

 $^{\star}C_{L}$ Includes probe and jig capacitance

Figure 3. Test Circuit

SWITCHING WAVEFORMS






Figure 4.

Figure 5.





Figure 6.

EXPANDED LOGIC DIAGRAM

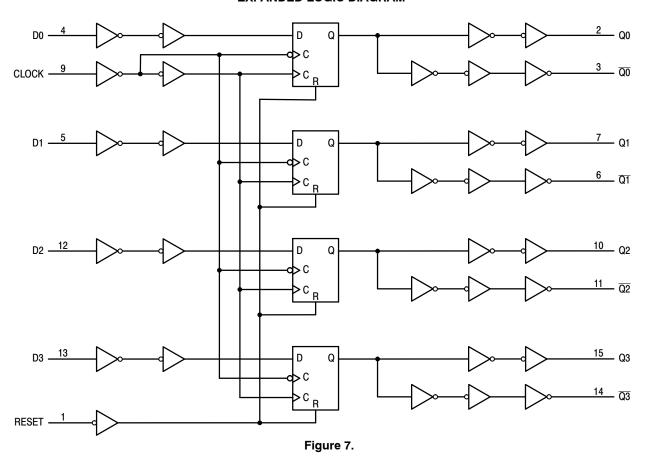


ORDERING INFORMATION

Device	Marking	Package	Shipping [†]
MC74HC175ADG	HC175AG	SOIC-16	48 Units / Rail
MC74HC175ADR2G	HC175AG	SOIC-16	2500 Units / Tape & Reel
MC74HC175ADTR2G	HC 175A	TSSOP-16	2500 Units / Tape & Reel
MC74HC175ADTR2G-Q*	HC 175A	TSSOP-16	2500 Units / Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

^{*-}Q Suffix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

PACKAGE DIMENSIONS

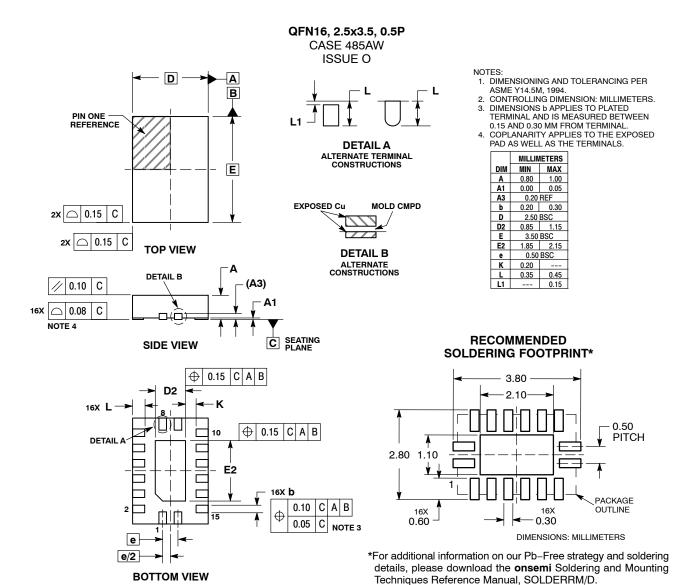







SOIC-16 9.90x3.90x1.50 1.27P CASE 751B ISSUE L


DATE 29 MAY 2024

NOTES:


- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
- 2. DIMENSION IN MILLIMETERS. ANGLE IN DEGREES.
- 3. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD PROTRUSION.
- 4. MAXIMUM MOLD PROTRUSION 0.15mm PER SIDE.
- DIMENSION 6 DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127mm TOTAL IN EXCESS OF THE 6 DIMENSION AT MAXIMUM MATERIAL CONDITION.

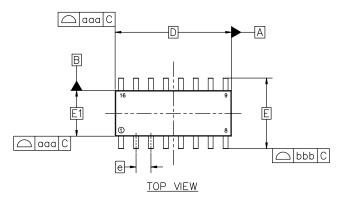

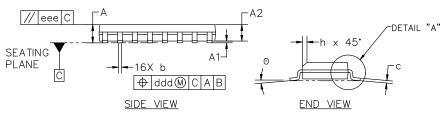

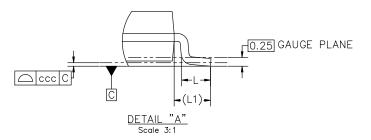

MILLIMETERS					
DIM	MIN	NOM	MAX		
А	1.35	1.55	1.75		
A1	0.00	0.05	0.10		
A2	1.35	1.50	1.65		
b	0.35	0.42	0.49		
С	0.19	0.22	0.25		
D	9.90 BSC				
E	6.00 BSC				
E1	3.90 BSC				
е		1.27 BSC			
h	0.25		0.50		
L	0.40	0.83	1.25		
L1		1.05 REF			
Θ	0.		7*		
TOLERAN	CE OF FC	RM AND	POSITION		
aaa		0.10			
bbb		0.20			
ccc		0.10			
ddd		0.25			
eee		0.10			



RECOMMENDED MOUNTING FOOTPRINT

*FOR ADDITIONAL INFORMATION ON OUR
PB-FREE STRATEGY AND SOLDERING DETAILS,
PLEASE DOWNLOAD THE onsemi SOLDERING
AND MOUNTING TECHNIQUES REFERENCE
MANUAL, SOLDERRM/D

DOCUMENT NUMBER:	98ASB42566B	Electronic versions are uncontrolled except when accessed directly from Printed versions are uncontrolled except when stamped "CONTROLLED"	
DESCRIPTION:	SOIC-16 9.90X3.90X1.50 1	.27P	PAGE 1 OF 2


onsemi and ONSemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.



SOIC-16 9.90x3.90x1.50 1.27P CASE 751B ISSUE L

DATE 29 MAY 2024

GENERIC MARKING DIAGRAM*



XXXXX = Specific Device Code

A = Assembly Location

WL = Wafer Lot
 Y = Year
 WW = Work Week
 G = Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

077/15/		077/15.0		071/15 0		T	
STYLE 1: PIN 1.	COLLECTOR	STYLE 2:	CATHODE	STYLE 3: PIN 1.		TYLE 4: PIN 1.	COLLECTOR DVF #1
PIN 1. 2.		PIN 1. 2.		PIN 1. 2.	COLLECTOR, DYE #1 BASE, #1	2.	
2. 3.	EMITTER	2. 3.	NO CONNECTION				
				3.		3.	
4.	NO CONNECTION	4.		4.		4.	
5.	EMITTER	5.		5.		5.	
6.	BASE	6.		6.		6.	
7.		7.			EMITTER, #2		COLLECTOR, #4
8.		8.		8.			COLLECTOR, #4
9.		9.			COLLECTOR, #3		BASE, #4
10.			ANODE		BASE, #3		EMITTER, #4
	NO CONNECTION	11.			EMITTER, #3		BASE, #3
	EMITTER		CATHODE		COLLECTOR, #3		EMITTER, #3
	BASE		CATHODE		COLLECTOR, #4		BASE, #2
	COLLECTOR	14.			BASE, #4		EMITTER, #2
15.			ANODE		EMITTER, #4		BASE, #1
16.	COLLECTOR	16.	CATHODE	16.	COLLECTOR, #4	16.	EMITTER, #1
STYLE 5:		STYLE 6:		STYLE 7:			
STYLE 5: PIN 1.	DRAIN, DYE #1	STYLE 6: PIN 1.	CATHODE	STYLE 7: PIN 1.	SOURCE N-CH		
	DRAIN, DYE #1 DRAIN, #1			PIN 1.	SOURCE N-CH COMMON DRAIN (OUTPUT)		
PIN 1.	,	PIN 1.	CATHODE	PIN 1.	COMMON DRAIN (OUTPUT)		
PIN 1. 2.	DRAIN, #1	PIN 1. 2.	CATHODE CATHODE	PIN 1. 2.	COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT)		
PIN 1. 2. 3.	DRAIN, #1 DRAIN, #2	PIN 1. 2. 3.	CATHODE CATHODE	PIN 1. 2. 3.	COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT)		
PIN 1. 2. 3. 4.	DRAIN, #1 DRAIN, #2 DRAIN, #2	PIN 1. 2. 3. 4.	CATHODE CATHODE CATHODE CATHODE	PIN 1. 2. 3. 4.	COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) GATE P-CH COMMON DRAIN (OUTPUT)		
PIN 1. 2. 3. 4. 5.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3	PIN 1. 2. 3. 4. 5.	CATHODE CATHODE CATHODE CATHODE	PIN 1. 2. 3. 4. 5.	COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) GATE P-CH COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT)		
PIN 1. 2. 3. 4. 5.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3 DRAIN, #4	PIN 1. 2. 3. 4. 5.	CATHODE CATHODE CATHODE CATHODE CATHODE	PIN 1. 2. 3. 4. 5.	COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) GATE P-CH COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT)		
PIN 1. 2. 3. 4. 5. 6. 7.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3	PIN 1. 2. 3. 4. 5. 6.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE	PIN 1. 2. 3. 4. 5. 6.	COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) GATE P-CH COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) SOURCE P-CH		
PIN 1. 2. 3. 4. 5. 6. 7.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3 DRAIN, #4 DRAIN, #4	PIN 1. 2. 3. 4. 5. 6. 7.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE ANODE	PIN 1. 2. 3. 4. 5. 6. 7.	COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) GATE P-CH COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) SOURCE P-CH SOURCE P-CH		
PIN 1. 2. 3. 4. 5. 6. 7. 8. 9.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3 DRAIN, #4 DRAIN, #4 SOURCE, #4	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE ANODE ANODE	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9.	COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) GATE P-CH COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) SOURCE P-CH SOURCE P-CH COMMON DRAIN (OUTPUT)		
PIN 1. 2. 3. 4. 5. 6. 7. 8. 9.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3 DRAIN, #4 DRAIN, #4 GATE, #4 SOURCE, #4 GATE, #3	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE ANODE ANODE	PIN 1. 2. 3. 4. 5. 6. 7. 8.	COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) GATE P-CH COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) SOURCE P-CH SOURCE P-CH COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT)		
PIN 1. 2. 3. 4. 5. 6. 7. 8. 9.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3 DRAIN, #4 DRAIN, #4 SOURCE, #4	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE ANODE ANODE ANODE ANODE ANODE ANODE ANODE	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9.	COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) GATE P-CH COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) SOURCE P-CH SOURCE P-CH COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT)		
PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3 DRAIN, #4 GATE, #4 SOURCE, #4 GATE, #3 SOURCE, #3 GATE, #2	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE ANODE ANODE ANODE ANODE ANODE ANODE ANODE	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10.	COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) GATE P-CH COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) SOURCE P-CH SOURCE P-CH COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) GOMMON DRAIN (OUTPUT) GATE N-CH		
PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3 DRAIN, #4 DRAIN, #4 DRAIN, #4 GATE, #4 SOURCE, #4 GATE, #3 SOURCE, #3 GATE, #2 SOURCE, #2 SOURCE, #2	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE ANODE	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13.	COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) GATE P-CH COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) SOURCE P-CH SOURCE P-CH COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) CATE N-CH COMMON DRAIN (OUTPUT)		
PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3 DRAIN, #4 GATE, #4 SOURCE, #4 GATE, #3 SOURCE, #3 GATE, #2	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE ANODE	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12.	COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) GATE P-CH COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) SOURCE P-CH SOURCE P-CH COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) COMMON DRAIN (OUTPUT) GATE N-CH COMMON DRAIN (OUTPUT)		

DOCUMENT NUMBER:	98ASB42566B	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SOIC-16 9.90X3.90X1.50 1.27P		PAGE 2 OF 2	

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

2X L/2


L

☐ 0.15 (0.006)

PIN 1 IDENT.

υ®



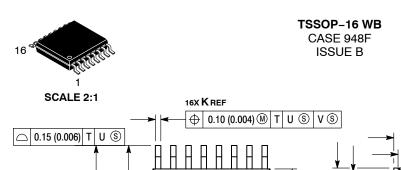

DATE 19 OCT 2006

NOTES

Κ

SECTION N-N

0.25 (0.010)

J1

В

-U-


- DIMENSIONING AND TOLERANCING PER
- ANSI Y14.5M, 1982. CONTROLLING DIMENSION: MILLIMETER.
- DIMENSION A DOES NOT INCLUDE MOLD FLASH. PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT
- EXCEED 0.15 (0.006) PER SIDE.
 DIMENSION B DOES NOT INCLUDE
 INTERLEAD FLASH OR PROTRUSION.
- INTERLEAD FLASH OR PROTRUSION.
 INTERLEAD FLASH OR PROTRUSION SHALL
 NOT EXCEED 0.25 (0.010) PER SIDE.
 DIMENSION K DOES NOT INCLUDE DAMBAR
 PROTRUSION. ALLOWABILE DAMBAR
 PROTRUSION SHALL BE 0.08 (0.003) TOTAL
 IN EXCESS OF THE K DIMENSION AT
 MAXIMUM MATERIAL CONDITION.
 TERMINIAL NILMBERS ADE SUCIUMI ECIP.
- TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
- DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
Α	4.90	5.10	0.193	0.200
В	4.30	4.50	0.169	0.177
С		1.20		0.047
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.65 BSC		0.026 BSC	
Н	0.18	0.28	0.007	0.011
7	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
K	0.19	0.30	0.007	0.012
K1	0.19	0.25	0.007	0.010
L	6.40 BSC		0.252 BSC	
М	00	00	00	0 0

DETAIL E -W-☐ 0.10 (0.004) **DETAIL E** SEATING PLANE D

RECOMMENDED SOLDERING FOOTPRINT*

-V-

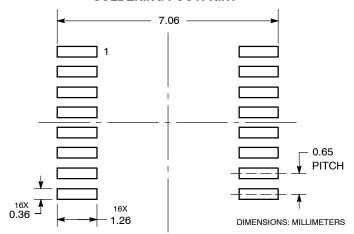

^{*}For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

GENERIC MARKING DIAGRAM*



= Specific Device Code XXXX Α = Assembly Location

= Wafer Lot L = Year W = Work Week G or • = Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98ASH70247A	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	TSSOP-16		PAGE 1 OF 1	

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI., and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems. or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales