
SCLS499C-MAY 2003-REVISED JUNE 2006

FEATURES

- Controlled Baseline
 - One Assembly/Test Site, One Fabrication Site
- Extended Temperature Performance of –55°C to 125°C
- Enhanced Diminishing Manufacturing Sources (DMS) Support
- Enhanced Product-Change Notification
- Qualification Pedigree (1)
- Typical V_{OLP} (Output Ground Bounce)
 <0.8 V at V_{CC} = 3.3 V, T_A = 25°C
- Typical V_{OHV} (Output V_{OH} Undershoot)
 >2.3 V at V_{CC} = 3.3 V, T_A = 25°C
- Supports Mixed-Mode Voltage Operation on All Ports
- I_{off} Supports Partial-Power-Down Mode Operation
- (1) Component qualification in accordance with JEDEC and industry standards to ensure reliable operation over an extended temperature range. This includes, but is not limited to, Highly Accelerated Stress Test (HAST) or biased 85/85, temperature cycle, autoclave or unbiased HAST, electromigration, bond intermetallic life, and mold compound life. Such qualification testing should not be viewed as justifying use of this component beyond specified performance and environmental limits.

- ESD Protection Exceeds JESD 22
 - 2000-V Human-Body Model (A114-A)
 - 200-V Machine Model (A115-A)
 - 1000-V Charged-Device Model (C101)



DESCRIPTION/ORDERING INFORMATION

This hex Schmitt-trigger inverter is designed for 2-V to 5.5-V V_{CC} operation.

The SN74LV14A contains six independent inverters. This device performs the Boolean function $Y = \overline{A}$.

This device is fully specified for partial-power-down applications using I_{off} . The I_{off} circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

ORDERING INFORMATION

T _A	PACK	AGE ⁽¹⁾	ORDERABLE PART NUMBER	TOP-SIDE MARKING
-40°C to 105°C	TSSOP - PW	Tape and reel	SN74LV14ATPWREP	LV14AEP
55°C to 135°C	SOIC - D	Tape and reel	SN74LV14AMDREP	LV14AEP
−55°C to 125°C	TSSOP - PW	Tape and reel	SN74LV14AMPWREP	LV14AEP

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

FUNCTION TABLE (each inverter)

INPUT A	OUTPUT Y
Н	L
L	Н



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



LOGIC DIAGRAM, EACH INVERTER (POSITIVE LOGIC)



Absolute Maximum Ratings(1)

over operating free-air temperature range (unless otherwise noted)

				MIN	MAX	UNIT
V_{CC}	Supply voltage range			-0.5	7	V
VI	Input voltage range (2)			-0.5	7	V
Vo	Voltage range applied to any output in the high-in	mpedance or power-off state ⁽²⁾		-0.5	7	V
Vo	Output voltage range ⁽²⁾⁽³⁾			-0.5	V _{CC} + 0.5	V
I_{IK}	Input clamp current	V _I < 0			-20	mA
I _{OK}	Output clamp current	V _O < 0			-50	mA
Io	Continuous output current	$V_O = 0$ to V_{CC}			±25	mA
	Continuous current through V _{CC} or GND				±50	mA
0	Thermal impedance (4)	D package			133.5	°C/W
θ_{JA}	memai impedance · · ·	PW package			113	C/VV
T _{stg}	Storage temperature range		-65	150	°C	

⁽¹⁾ Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

⁽²⁾ The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.

⁽³⁾ This value is limited to 5.5 V maximum.

⁽⁴⁾ The package thermal impedance is calculated in accordance with JESD 51-7.



SCLS499C-MAY 2003-REVISED JUNE 2006

Recommended Operating Conditions⁽¹⁾

			MIN	MAX	UNIT	
V_{CC}	Supply voltage		2	5.5	V	
		V _{CC} = 2 V	1.5			
V	High level input voltage	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$	$V_{CC} \times 0.7$		V	
V_{IH}	nigii-level iriput voltage	$V_{CC} = 3 \text{ V to } 3.6 \text{ V}$	$V_{CC} \times 0.7$		V	
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	$V_{CC} \times 0.7$			
		V _{CC} = 2 V		0.5		
W	Low level input valtage	V _{CC} = 2.3 V to 2.7 V		$V_{CC} \times 0.3$	V	
V_{IL}	Low-level input voltage	V _{CC} = 3 V to 3.6 V		$V_{CC} \times 0.3$	V	
		V _{CC} = 4.5 V to 5.5 V		$V_{CC} \times 0.3$		
VI	Input voltage		0	5.5	V	
Vo	Output voltage		0	V_{CC}	V	
		V _{CC} = 2 V		-50	μΑ	
	High-level input voltage Low-level input voltage Input voltage Output voltage	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$		-2		
I _{OH}	nigii-level output current	$V_{CC} = 3 \text{ V to } 3.6 \text{ V}$		9	mA	
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$		-12		
		V _{CC} = 2 V		50	μΑ	
	Low lovel output ourrent	V _{CC} = 2.3 V to 2.7 V		2		
I _{OL}	Low-level output current	V _{CC} = 3 V to 3.6 V		6	mA	
		V _{CC} = 4.5 V to 5.5 V		12		
_	Operating free air temperature	SN74LV14AT	-40	105	°C	
T_A	Operating free-air temperature	SN74LV14AM	-55	125	-0	

⁽¹⁾ All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation. See the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

SN74LV14A-EP HEX SCHMITT-TRIGGER INVERTER

SCLS499C-MAY 2003-REVISED JUNE 2006



Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V	SN74L	V14AT	SN74L	V14AM	UNIT
PARAMETER	TEST CONDITIONS	V _{cc}	MIN	TYP MAX	MIN	TYP MAX	UNII
V _{T+}		2.5 V		1.75		1.78	
Positive-going		3.3 V		2.31		2.31	V
threshold		5 V		3.5		3.5	
V _{T-}		2.5 V	0.75		0.75		
Negative-going		3.3 V	0.99		0.97		V
threshold		5 V	1.5		1.5		
$\begin{array}{c} \Delta V_T \\ \text{Hysteresis} \\ (V_{T+} - V_{T-}) \end{array}$		2.5 V	0.25	1	0.25	1	
		3.3 V	0.33	1.32	0.33	1.37	V
		5 V	0.5	2	0.5	2	
	$I_{OH} = -50 \mu A$	2 V to 5.5 V	V _{CC} - 0.1		V _{CC} - 0.1		
V	$I_{OH} = -2 \text{ mA}$	2.3 V	2		2		V
V_{OH}	$I_{OH} = -6 \text{ mA}$	3 V	2.48		2.48		V
	$I_{OH} = -12 \text{ mA}$	4.5 V	3.8		3.8		
	$I_{OL} = 50 \mu A$	2 V to 5.5 V		0.1		0.1	
\ <i>/</i>	$I_{OL} = 2 \text{ mA}$	2.3 V		0.4		0.4	V
V_{OL}	I _{OL} = 6 mA	3 V		0.44		0.44	V
	I _{OL} = 12 mA	4.5 V		0.55		0.55	
I _I	$V_1 = V_{CC}$ or GND	0 to 5.5 V		±1		±1	μΑ
I _{cc}	$V_1 = V_{CC}$ or GND, $I_0 = 0$	5.5 V		20		20	μΑ
I _{off}	V_I or $V_O = 0$ to 5.5 V	0 V		5		5	μΑ
C	V - V or CND	3.3 V		2.3		2.3	nf
C_{i}	$V_I = V_{CC}$ or GND	5 V		2.3		2.3	pf

Switching Characteristics

over recommended operating free-air temperature range, V_{CC} = 3.3 V \pm 0.3 V (unless otherwise noted) (see Figure 1)

	PARAMETER	FROM	то	LOAD	T,	_λ = 25°C		MIN	MAX	UNIT
		(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	IVIIIN IVIAA	IVIAA	UNIT
	t _{pd}	Α	Υ	C _L = 50 pF		9.6	16.3	1	20.4	ns

Switching Characteristics

over recommended operating free-air temperature range, V_{CC} = 5 V \pm 0.5 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	то	LOAD	T,	չ = 25°0	3	MIN	MAX	UNIT
FARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	IVIIIV	IVIAA	ONIT
t _{pd}	Α	Y	C _L = 50 pF		6.7	10.6	1	14	ns



SN74LV14A-EP HEX SCHMITT-TRIGGER INVERTER

SCLS499C-MAY 2003-REVISED JUNE 2006

Noise Characteristics⁽¹⁾

 V_{CC} = 3.3 V, C_L = 50 pF, T_A = 25°C

	PARAMETER	MIN	TYP	MAX	UNIT
V _{OL(P)}	Quiet output, maximum dynamic V _{OL}		0.2	8.0	V
V _{OL(V)}	Quiet output, minimum dynamic V _{OL}		-0.1	-0.8	V
V _{OH(V)}	Quiet output, minimum dynamic V _{OH}		3.1		V
V _{IH(D)}	High-level dynamic input voltage	2.31			V
$V_{IL(D)}$	Low-level dynamic input voltage			0.99	V

⁽¹⁾ Characteristics are for surface-mount packages only.


Operating Characteristics

T_A = 25°C

	PARAMETER	TEST CO	NDITIONS	V _{cc}	TYP	UNIT
C _{pd}	Downs dissination appositance	C 50 5 5	f 10 MH=	3.3 V	8.8	pF
	Power dissipation capacitance	$C_L = 50 \text{ pF},$	f = 10 MHz	5 V	9.6	



PARAMETER MEASUREMENT INFORMATION

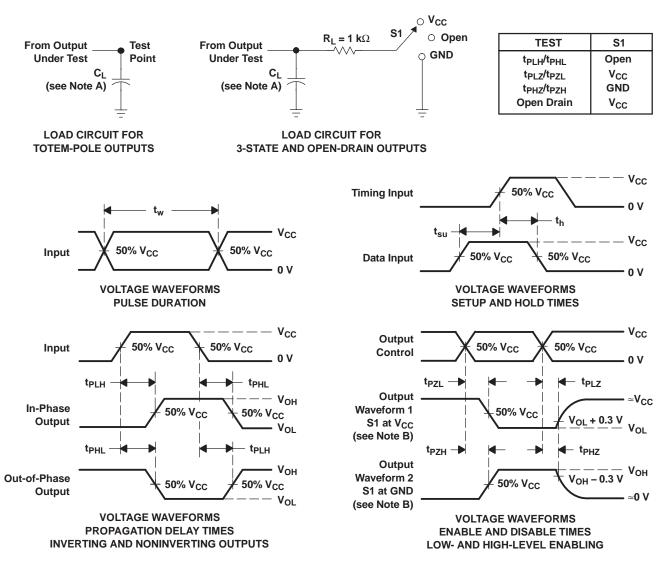

- NOTES: A. C_L includes probe and jig capacitance.
 - B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
 - C. All input pulses are supplied by generators having the following characteristics: PRR \leq 1 MHz, $Z_O = 50 \Omega$, $t_r \leq$ 3 ns, $t_f \leq$ 3 ns.
 - D. The outputs are measured one at a time, with one input transition per measurement.
 - E. t_{PLZ} and t_{PHZ} are the same as t_{dis}.
 - F. t_{PZL} and t_{PZH} are the same as t_{en}.
 - G. t_{PHL} and t_{PLH} are the same as t_{pd} .
 - H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuits and Voltage Waveforms

www.ti.com 31-Oct-2024

PACKAGING INFORMATION

Orderable Device	Status	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
SN74LV14AMDREP	ACTIVE	SOIC	D	14	2500	RoHS & Green	` '	Level-1-260C-UNLIM	-55 to 125	LV14AMEP	Samples
SN74LV14AMPWREP	OBSOLETE	TSSOP	PW	14		TBD	Call TI	Call TI	-55 to 125	LV14AEP	
SN74LV14ATPWREP	ACTIVE	TSSOP	PW	14	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 105	LV14AEP	Samples
V62/03662-01XE	ACTIVE	TSSOP	PW	14	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 105	LV14AEP	Samples
V62/03662-02YE	ACTIVE	SOIC	D	14	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	LV14AMEP	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead finish/Ball material Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and

PACKAGE OPTION ADDENDUM

www.ti.com 31-Oct-2024

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF SN74LV14A-EP:

Catalog: SN74LV14A

Automotive: SN74LV14A-Q1

NOTE: Qualified Version Definitions:


- Catalog TI's standard catalog product
- Automotive Q100 devices qualified for high-reliability automotive applications targeting zero defects

PACKAGE MATERIALS INFORMATION

www.ti.com 31-Oct-2024

TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LV14AMDREP	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74LV14ATPWREP	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

www.ti.com 31-Oct-2024



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74LV14AMDREP	SOIC	D	14	2500	356.0	356.0	35.0
SN74LV14ATPWREP	TSSOP	PW	14	2000	356.0	356.0	35.0



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm, per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
- 5. Reference JEDEC registration MS-012, variation AB.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.





SMALL OUTLINE PACKAGE



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2024, Texas Instruments Incorporated