# onsemi

# Dual 1-of-4 Decoder/ Demultiplexer

High-Performance Silicon-Gate CMOS


# MC74HC139A

The MC74HC139A is identical in pinout to the LS139. The device inputs are compatible with standard CMOS outputs; with pull-up resistors, they are compatible with LSTTL outputs.

This device consists of two independent 1-of-4 decoders, each of which decodes a two-bit Address to one-of-four active-low outputs. Active-low Selects are provided to facilitate the demultiplexing and cascading functions. The demultiplexing function is accomplished by using the Address inputs to select the desired device output, and utilizing the Select as a data input.

#### Features


- Output Drive Capability: 10 LSTTL Loads
- Outputs Directly Interface to CMOS, NMOS and TTL
- Operating Voltage Range: 2.0 to 6.0 V
- Low Input Current: 1.0 µA
- High Noise Immunity Characteristic of CMOS Devices
- In Compliance with the Requirements Defined by JEDEC Standard No. 7 A
- Chip Complexity: 100 FETs or 25 Equivalent Gates
- -Q Suffix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable\*
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

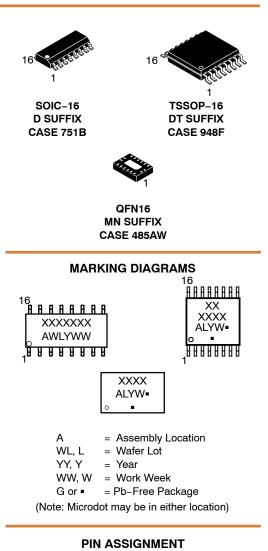

SELECT <sub>a</sub>	1●	16	l v <sub>cc</sub>
A0 <sub>a</sub> [	2	15	SELECT <sub>b</sub>
A1 <sub>a</sub> [	3	14	A0 <sub>b</sub>
Y0 <sub>a</sub> [	4	13	] <sub>АОь</sub> ] А1 <sub>ь</sub>
Y1 <sub>a</sub>	5	12	] Y0 <sub>b</sub>
Y2 <sub>a</sub> L	6	11	] Y1 <sub>b</sub>
үз <sub>а</sub> [	7	10	] Y2 <sub>b</sub>
GND	8	9	] үз <sub>ь</sub>

# ORDERING INFORMATION

See detailed ordering and shipping information on page 6 of this data sheet.

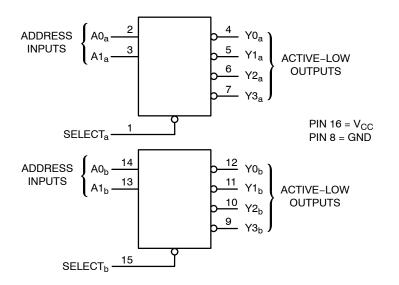

#### FUNCTION TABLE

	Inputs	3		Out	puts	
Select	A1	A0	Y0	Y1	Y2	Y3
Н	Х	Х	Н	Н	Н	Н
L	L	L	L	Н	Н	н
L	L	Н	н	L	Н	н
L	Н	L	н	Н	L	н
L	Н	Н	Н	Н	Н	L

X = don't care

Figure 1. Logic Diagram

#### **MAXIMUM RATINGS**

Symbol	Parameter		Value	Unit
V <sub>CC</sub>	DC Supply Voltage		-0.5 to +6.5	V
V <sub>IN</sub>	DC Input Voltage		–0.5 to V <sub>CC</sub> + 0.5	V
V <sub>OUT</sub>	DC Output Voltage		–0.5 to V <sub>CC</sub> + 0.5	V
I <sub>IN</sub>	DC Input Current, per Pin		±20	mA
I <sub>OUT</sub>	DC Output Current, per Pin		±25	mA
I <sub>CC</sub>	DC Supply Current, V <sub>CC</sub> and GND Pins		±50	mA
I <sub>IK</sub>	Input Clamp Current (V <sub>IN</sub> < 0 or V <sub>IN</sub> > V <sub>CC</sub> )		±20	mA
I <sub>OK</sub>	Output Clamp Current (V <sub>OUT</sub> < 0 or V <sub>OUT</sub> > V <sub>CC</sub> )		±20	mA
T <sub>STG</sub>	Storage Temperature		–65 to +150	°C
ΤL	Lead Temperature, 1 mm from Case for 10 Seconds		260	°C
TJ	Junction Temperature Under Bias		±150	°C
$\theta_{JA}$	Thermal Resistance (Note 1)	SOIC-16 QFN16 TSSOP-16	126 118 159	°C/W
PD	Power Dissipation in Still Air at 25°C	SOIC-16 QFN16 TSSOP-16	995 1062 787	mW
MSL	Moisture Sensitivity		Level 1	-
F <sub>R</sub>	Flammability Rating	Oxygen Index: 28 to 34	UL 94 V-0 @ 0.125 in	-
$V_{ESD}$	ESD Withstand Voltage (Note 2)	Human Body Model Charged Device Model	2000 1000	V
I <sub>LATCHUP</sub>	Latchup Performance (Note 3)		±100	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

 Measured with minimum pad spacing on an FR4 board, using 76 mm-by-114 mm, 2-ounce copper trace no air flow per JESD51-7.
HBM tested to EIA / JESD22-A114-A. CDM tested to JESD22-C101-A. JEDEC recommends that ESD qualification to EIA/JESD22-A115A (Machine Model) be discontinued. 3. Tested to EIA/JESD78 Class II.

#### **RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter	Min	Max	Unit
V <sub>CC</sub>	DC Supply Voltage	2.0	6.0	V
V <sub>IN</sub> , V <sub>OUT</sub>	DC Input Voltage, Output Voltage	0	V <sub>CC</sub>	V
T <sub>A</sub>	Operating Temperature, All Package Types	-55	+125	°C
t <sub>r</sub> , t <sub>f</sub>	Input Rise and Fall Time $V_{CC} = 2.0$ (Figure 3) $V_{CC} = 4.5$ $V_{CC} = 6.0$	V 0	1000 500 400	ns

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

4. Unused inputs may not be left open. All inputs must be tied to a high-logic voltage level or a low-logic input voltage level.

#### **DC ELECTRICAL CHARACTERISTICS**

			Vcc	Guaran	teed Limi	t	
Symbol	Parameter	Test Conditions	V	-55°C to 25°C	≤ <b>85°C</b>	≤ <b>125°C</b>	Unit
V <sub>IH</sub>	Minimum High-Level Input Voltage	$V_{OUT}$ = 0.1 V or $V_{CC}$ – 0.1 V $ I_{OUT}  \le 20 \ \mu A$	2.0 4.5 6.0	1.5 3.15 4.2	1.5 3.15 4.2	1.5 3.15 4.2	V
V <sub>IL</sub>	Maximum Low-Level Input Voltage	$V_{OUT}$ = 0.1 V or V <sub>CC</sub> – 0.1 V $ I_{OUT}  \le 20 \ \mu A$	2.0 4.5 6.0	0.5 1.35 1.8	0.5 1.35 1.8	0.5 1.35 1.8	V
V <sub>OH</sub>	Minimum High-Level Output Voltage	$V_{IN} = V_{IH} \text{ or } V_{IL}$ $ I_{OUT}  \le 20 \ \mu A$	2.0 4.5 6.0	1.9 4.4 5.9	1.9 4.4 5.9	1.9 4.4 5.9	V
		$\begin{array}{ll} V_{IN} = V_{IH} \text{ or } V_{IL} & \left  \begin{matrix} I_{OUT} \end{matrix} \right  \leq 4.0 \text{ mA} \\ \left  I_{OUT} \end{matrix} \right  \leq 5.2 \text{ mA} \end{array}$	4.5 6.0	3.98 5.48	3.84 5.34	3.70 5.20	
V <sub>OL</sub>	Maximum Low-Level Output Voltage	$V_{IN} = V_{IH} \text{ or } V_{IL}$ $ I_{OUT}  \le 20 \ \mu A$	2.0 4.5 6.0	0.1 0.1 0.1	0.1 0.1 0.1	0.1 0.1 0.1	V
		$\begin{array}{ll} V_{IN} = V_{IH} \text{ or } V_{IL} & \left  \begin{matrix} I_{OUT} \end{matrix} \right  \leq 4.0 \text{ mA} \\ \left  I_{OUT} \end{matrix} \right  \leq 5.2 \text{ mA} \end{array}$	4.5 6.0	0.26 0.26	0.33 0.33	0.40 0.40	
I <sub>IN</sub>	Maximum Input Leakage Cur- rent	V <sub>IN</sub> = V <sub>CC</sub> or GND	6.0	±0.1	±1.0	±1.0	μΑ
I <sub>CC</sub>	Maximum Quiescent Supply Current (per Package)	$V_{IN} = V_{CC}$ or GND $I_{OUT} = 0 \ \mu A$	6.0	4	40	160	μΑ

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


#### **AC ELECTRICAL CHARACTERISTICS**

		V <sub>cc</sub>	Guaranteed Limit			
Symbol	Parameter	V	–55°C to 25°C	≤ <b>85°C</b>	≤125°C	Unit
t <sub>PLH</sub> , t <sub>PHL</sub>	Maximum Propagation Delay, Select to Output Y (Figures 2 and 3)	2.0 4.5 6.0	115 23 20	145 29 25	175 35 30	ns
t <sub>PLH</sub> , t <sub>PHL</sub>	Maximum Propagation Delay, Input A to Output Y (Figures 2 and 4)	2.0 4.5 6.0	115 23 20	145 29 25	175 35 30	ns
t <sub>TLH</sub> , t <sub>THL</sub>	Maximum Output Transition Time, Any Output (Figures 2 and 3)	2.0 4.5 6.0	75 15 13	95 19 16	110 22 19	ns
C <sub>in</sub>	Maximum Input Capacitance	-	10	10	10	pF

		Typical @ 25°C, V <sub>CC</sub> = 5.0 V	
C <sub>PD</sub>	Power Dissipation Capacitance (Per Decoder) (Note 5)	55	pF

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. 5. Used to determine the no-load dynamic power consumption:  $P_D = C_{PD} V_{CC}^2 f + I_{CC} V_{CC}$ .

#### SWITCHING WAVEFORMS AND TEST CIRCUIT



Test	Switch Position	CL	RL
t <sub>PLH</sub> / t <sub>PHL</sub>	Open	50 pF	1 kΩ
t <sub>PLZ</sub> / t <sub>PZL</sub>	V <sub>CC</sub>		
t <sub>PHZ</sub> / t <sub>PZH</sub>	GND		

\*CL Includes probe and jig capacitance

#### Figure 2. Test Circuit


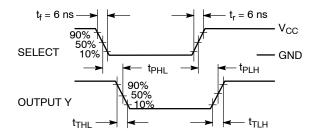


Figure 3. Switching Waveform



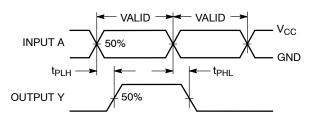

#### **PIN DESCRIPTIONS**

#### ADDRESS INPUTS

#### A0a, A1a, A0b, A1b (Pins 2, 3, 14, 13)

Address inputs. These inputs, when the respective 1–of–4 decoder is enabled, determine which of its four active–low outputs is selected.

#### **CONTROL INPUTS**

#### Select<sub>a</sub>, Select<sub>b</sub> (Pins 1, 15)

Active-low select inputs. For a low level on this input, the outputs for that particular decoder follow the Address

inputs. A high level on this input forces all outputs to a high level.

#### OUTPUTS

#### Y0<sub>a</sub> - Y3<sub>a</sub>, Y0<sub>b</sub> - Y3<sub>b</sub> (Pins 4 - 7, 12, 11, 10, 9)

Active-low outputs. These outputs assume a low level when addressed and the appropriate Select input is active. These outputs remain high when not addressed or the appropriate Select input is inactive.

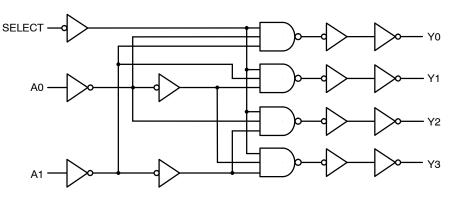


Figure 5. Expanded Logic Diagram (1/2 of Device)


#### **ORDERING INFORMATION**

Device	Marking	Package	Shipping <sup>†</sup>
MC74HC139ADR2G	HC139AG	SOIC-16	2500 / Tape & Reel
MC74HC139ADR2G-Q*	HC139AG	SOIC-16	2500 / Tape & Reel
MC74HC139ADTR2G	HC 139A	TSSOP-16	2500 / Tape & Reel
MC74HC139ADTR2G-Q*	HC 139A	TSSOP-16	2500 / Tape & Reel

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.
\*-Q Suffix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP

Capable.

#### PACKAGE DIMENSIONS

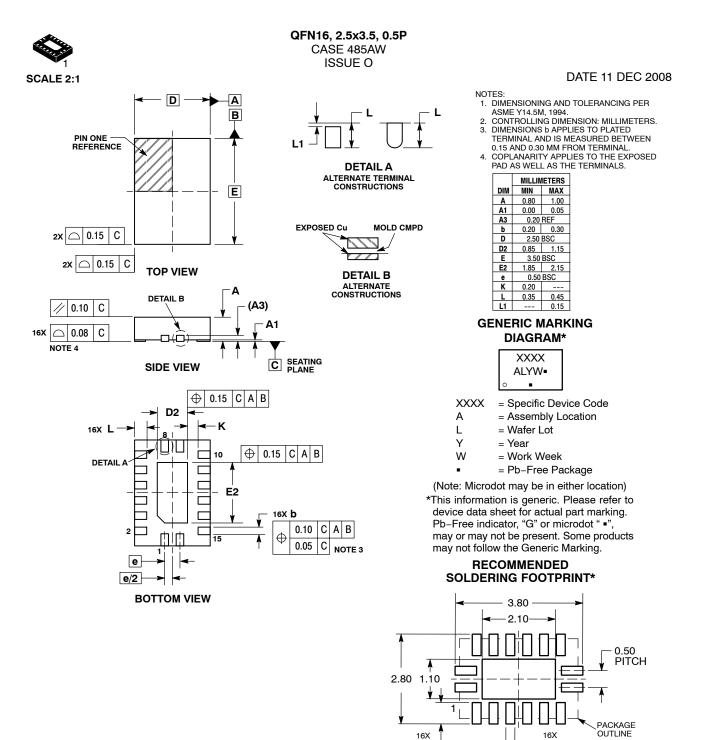

CONTRACTOR OF CO

\*For additional information on our Pb–Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

0.60



MILLIMETERS

NOM

1.55

0.18

1.37

0.42

0.22

9.90 BSC

MIN

1.35

0.10

1.25

0.35

0.19

DIM

А

Α1

A2

b

С

D

#### SOIC-16 9.90x3.90x1.37 1.27P CASE 751B ISSUE M

#### DATE 18 OCT 2024

MAX

1.75

0.25


1.50


0.49


0.25


NOTES:


- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
- 2. DIMENSION IN MILLIMETERS. ANGLE IN DEGREES.
- 3. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD PROTRUSION.
- 4. MAXIMUM MOLD PROTRUSION 0.15mm PER SIDE.
- DIMENSION & DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127mm TOTAL IN EXCESS OF THE & DIMENSION AT MAXIMUM MATERIAL CONDITION.

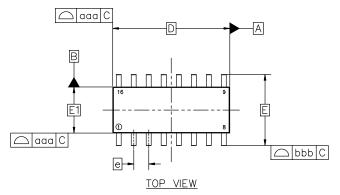

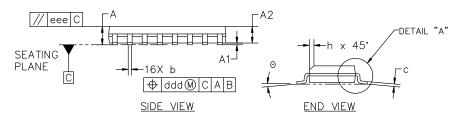

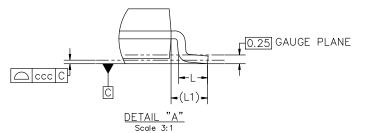

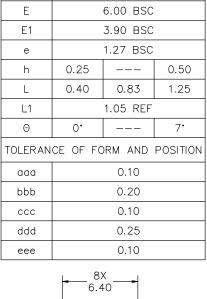



ECOMMENDED MOUNTING FOOTPRINT \*FOR ADDITIONAL INFORMATION ON OUR PB-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE onsemi SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D

DOCUMENT NUMBER:	98ASB42566B	Electronic versions are uncontrolled except when accessed directly from Printed versions are uncontrolled except when stamped "CONTROLLED	
DESCRIPTION:	SOIC-16 9.90X3.90X1.37 1	.27P	PAGE 1 OF 2

onsemi and ONSEMi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights of others.

#### SOIC-16 9.90x3.90x1.37 1.27P CASE 751B ISSUE M

#### DATE 18 OCT 2024

#### GENERIC MARKING DIAGRAM\*

16	A	H	A.	- A	- A	A	A.	Æ
		XX)						
		XX	XX	XX	XX	XX)	XX	x
	0			NĽ				
1	H	H	Н	Н	Н	Н	Н	Ъ

XXXXX = Specific Device Code

A = Assembly Location

- WL = Wafer Lot
- Y = Year
- WW = Work Week
- G = Pb-Free Package


\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

STYLE 1:		STYLE 2:		STYLE 3:		STYLE 4:	
PIN 1.		PIN 1.		PIN 1.	COLLECTOR, DYE #1	PIN 1.	
2.		2.	ANODE	2.	BASE, #1	2.	
3.	EMITTER	3.	NO CONNECTION	3.	EMITTER, #1	3.	••••
4.	NO CONNECTION	4.	CATHODE	4.	COLLECTOR, #1	4.	
5.		5.	CATHODE	5.	COLLECTOR, #2	5.	COLLECTOR, #3
6.	BASE	6.	NO CONNECTION	6.	BASE, #2	6.	COLLECTOR, #3
7.	COLLECTOR	7.	ANODE	7.	EMITTER, #2	7.	COLLECTOR, #4
8.	COLLECTOR	8.	CATHODE	8.	COLLECTOR, #2	8.	COLLECTOR, #4
9.	BASE	9.	CATHODE	9.	COLLECTOR, #3	9.	BASE, #4
10.	EMITTER	10.	ANODE	10.	BASE, #3	10.	EMITTER, #4
11.	NO CONNECTION	11.	NO CONNECTION	11.	EMITTER, #3	11.	BASE, #3
12.	EMITTER	12.	CATHODE	12.	COLLECTOR, #3	12.	EMITTER, #3
13.	BASE	13.	CATHODE	13.	COLLECTOR, #4	13.	BASE, #2
14.	COLLECTOR	14.	NO CONNECTION	14.	BASE, #4	14.	EMITTER, #2
15.	EMITTER	15.	ANODE	15.	EMITTER, #4	15.	BASE, #1
16.	COLLECTOR	16.	CATHODE	16.	COLLECTOR, #4	16.	EMITTER, #1
STVLE 5		STVLE 6		STVLE 7			
STYLE 5: PIN 1	DRAIN DYE #1	STYLE 6: PIN 1	CATHODE	STYLE 7: PIN 1	SOURCE N-CH		
PIN 1.	DRAIN, DYE #1 DRAIN #1	PIN 1.	CATHODE	PIN 1.	SOURCE N-CH	)	
PIN 1. 2.	DRAIN, #1	PIN 1. 2.	CATHODE	PIN 1. 2.	COMMON DRAIN (OUTPUT		
PIN 1. 2. 3.	DRAIN, #1 DRAIN, #2	PIN 1. 2. 3.	CATHODE CATHODE	PIN 1. 2. 3.	COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT		
PIN 1. 2. 3. 4.	DRAIN, #1 DRAIN, #2 DRAIN, #2	PIN 1. 2. 3. 4.	CATHODE CATHODE CATHODE	PIN 1. 2. 3. 4.	COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT GATE P-CH	)	
PIN 1. 2. 3. 4. 5.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3	PIN 1. 2. 3. 4. 5.	CATHODE CATHODE CATHODE CATHODE	PIN 1. 2. 3. 4. 5.	COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT GATE P-CH COMMON DRAIN (OUTPUT	)	
PIN 1. 2. 3. 4. 5. 6.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3	PIN 1. 2. 3. 4. 5. 6.	CATHODE CATHODE CATHODE CATHODE CATHODE	PIN 1. 2. 3. 4. 5. 6.	COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT GATE P-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT	) )	
PIN 1. 2. 3. 4. 5. 6. 7.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3 DRAIN, #4	PIN 1. 2. 3. 4. 5. 6. 7.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE	PIN 1. 2. 3. 4. 5. 6. 7.	COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT GATE P-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT	) )	
PIN 1. 2. 3. 4. 5. 6. 7. 8.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #4 DRAIN, #4	PIN 1. 2. 3. 4. 5. 6. 7. 8.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE	PIN 1. 2. 3. 4. 5. 6. 7. 8.	COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT GATE P-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT SOURCE P-CH	) )	
PIN 1. 2. 3. 4. 5. 6. 7. 8. 9.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3 DRAIN, #4 DRAIN, #4 GATE, #4	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE ANODE	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9.	COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT GATE P-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT SOURCE P-CH SOURCE P-CH	) ) )	
PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3 DRAIN, #4 DRAIN, #4 GATE, #4 SOURCE, #4	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE ANODE ANODE	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10.	COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT GATE P-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT SOURCE P-CH SOURCE P-CH COMMON DRAIN (OUTPUT	) ) )	
PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 9. 10.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3 DRAIN, #4 DRAIN, #4 GATE, #4 SOURCE, #4 GATE, #3	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 9. 10.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE ANODE ANODE ANODE	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10.	COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT GATE P-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT SOURCE P-CH SOURCE P-CH SOURCE P-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT	) ) ) )	
PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 9. 10. 11.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3 DRAIN, #4 DRAIN, #4 GATE, #4 SOURCE, #4 GATE, #3 SOURCE, #3	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 9. 10. 11.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE ANODE ANODE ANODE ANODE	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12.	COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT GATE P-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT SOURCE P-CH SOURCE P-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT	) ) ) )	
PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 11. 12. 13.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3 DRAIN, #4 DRAIN, #4 DRAIN, #4 GATE, #4 SOURCE, #4 SOURCE, #3 SOURCE, #3 SOURCE, #3	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE ANODE ANODE ANODE ANODE ANODE ANODE	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13.	COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT GATE P-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT SOURCE P-CH SOURCE P-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT GATE N-CH	) ) ) )	
PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3 DRAIN, #4 DRAIN, #4 DRAIN, #4 GATE, #4 SOURCE, #4 GATE, #3 SOURCE, #2 SOURCE, #2	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE ANODE ANODE ANODE ANODE ANODE ANODE ANODE	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14.	COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT GATE P-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT SOURCE P-CH SOURCE P-CH SOURCE P-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT GATE N-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT	) ) ) ) )	
PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 11. 12. 13.	DRAIN, #1 DRAIN, #2 DRAIN, #2 DRAIN, #3 DRAIN, #3 DRAIN, #4 DRAIN, #4 DRAIN, #4 GATE, #4 SOURCE, #4 SOURCE, #3 SOURCE, #3 SOURCE, #3	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 9. 10. 11. 12. 13. 13. 14. 15.	CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE CATHODE ANODE ANODE ANODE ANODE ANODE ANODE	PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13.	COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT GATE P-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT SOURCE P-CH SOURCE P-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT GATE N-CH COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT COMMON DRAIN (OUTPUT	) ) ) ) )	

DOCUMENT NUMBER:	98ASB42566B	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SOIC-16 9.90X3.90X1.37 1.27P		PAGE 2 OF 2	

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

# onsemi

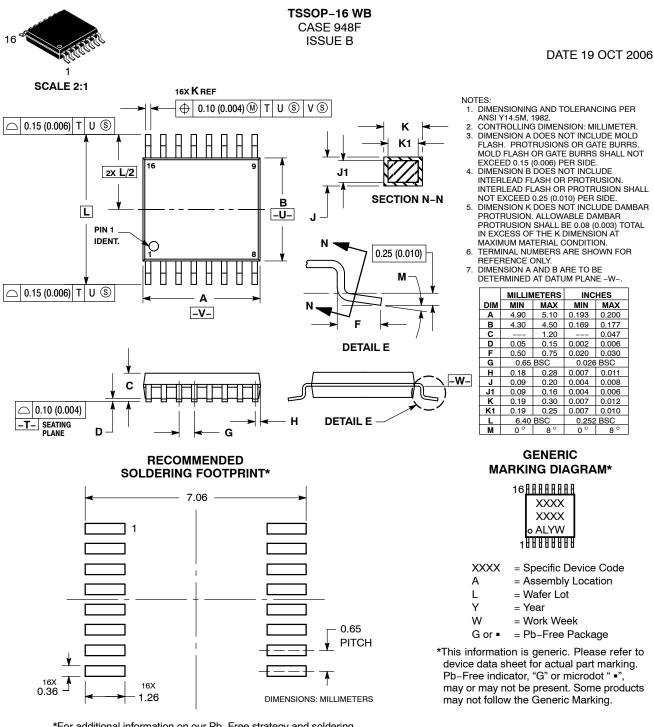

\*For additional information on our Pb–Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98ASH70247A	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	TSSOP-16		PAGE 1 OF 1	
onsemi and OOSEMU are trademarks of Semiconductor Components Industries LLC dba onsemi or its subsidiaries in the United States and/or other countries onsemi reserves				

onsemi and OI ISCI III are trademarks or Semiconductor Components industries, LLC data onsemi or its subsidiaries in the United States and/or other countries. Onsemi reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights or the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent\_Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

#### ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>