







Features

- Constant Voltage + Constant Current mode output
- Plastic housing with Class II design
- Built-in active PFC function
- No load power consumption <0.15W
- · IP67 rating for indoor or outdoor installations
- Typical lifetime>50000 hours
- 5 years warranty

Applications


- · LED panel lighting
- LED downlight
- LED decorative lighting
- LED tunnel lighting
- Moving sign
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location

GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

NPF-120 series is a 120W AC/DC LED driver featuring the dual modes constant voltage and constant current output. NPF-120 operates from $90 \sim 305$ VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the hign efficiency up to 90.5%, with the fanless design, the entire series is able to operate for -40° C $\sim +90^{\circ}$ C case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations.

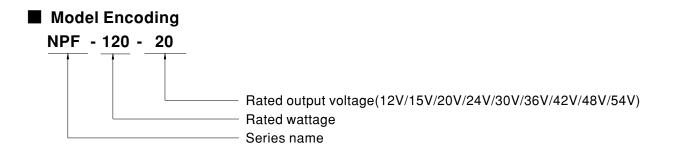



120W Constant Voltage + Constant Current LED Driver NPF-120 series

SPECIFICATION

MODEL		NPF-120-12	NPF-120-15	NPF-120-20	NPF-120-24	NPF-120-30	NPF-120-36	NPF-120-42	NPF-120-48	NPF-120-54
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
OUTPUT	CONSTANT CURRENT REGION Note.2	7.2 ~ 12V	9~15V	12 ~ 20V	14.4 ~ 24V	18~30V	21.6~36V	25.2 ~ 42V	28.8~48V	32.4 ~ 54V
	RATED CURRENT	10A	8A	6A	5A	4A	3.4A	2.9A	2.5A	2.3A
	RATED POWER Note.5	120W	120W	120W	120W	120W	122.4W	121.8W	120W	124.2W
	RIPPLE & NOISE (max.) Note.3	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	250mVp-p	250mVp-p	350mVp-p
	VOLTAGE TOLERANCE Note.4	±4.0%	±4.0%	±4.0%	±4.0%	±3.0%	±2.0%	±1.0%	±1.0%	±1.0%
		±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME Note.6					0.070			0.070	
	,	500ms, 80ms 115VAC / 230VAC 16ms/230VAC 16ms/115VAC								
	HOLD UP TIME (Typ.)									
INPUT	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)								
	FREQUENCY RANGE	47 ~ 63Hz								
	POWER FACTOR	PF≥0.97/115VAC, PF≥0.96/230VAC, PF≥0.94/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)								
	TOTAL HARMONIC DISTORTION	THD< 20%(@load≧60%/115VC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)								
	EFFICIENCY (Typ.)	89%	89%	90%	90.5%	89.5%	90%	90%	90%	90.5%
	AC CURRENT	1.3A / 115VA					0070	0070	0070	00.070
	INRUSH CURRENT(Typ.)	1.3A / 115VAC 0.65A / 230VAC 0.55A / 277VAC COLD START 60A(twidth=520µs measured at 50% lpeak) at 230VAC; Per NEMA 410								
	MAX. No. of PSUs on 16A	COLD START OVALIWIDIN=SZULS INCASURED AL SU% IPEAK) AT ZSUVAC; PER NEMA 410								
	CIRCUIT BREAKER	4 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC								
		<0.25mA/ 277VAC								
	NO LOAD POWER CONSUMPTION	<0.15W								
PROTECTION	OVER CURRENT	95 ~ 108% Constant current limiting, recovers automatically after fault condition is removed								
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed								
	OVER VOLTAGE	15 ~ 17V Shut down an	17.5 ~ 21V d latch off o/p	23 ~ 27V voltage, re-pov	28 ~ 34V ver on to recov	34 ~ 40V er	41~46V	46 ~ 54V	54 ~ 60V	59 ~ 66V
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover								
ENVIRONMENT	WORKING TEMP.	Tcase=-40 ~ +90°C (Please refer to * OUTPUT LOAD vs TEMPERATURE" section)								
	MAX. CASE TEMP.	Tcase=+90°C								
	WORKING HUMIDITY	20 ~ 95% RH non-condensing								
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH								
	TEMP. COEFFICIENT									
		±0.03%/°C (0~50°C)								
SAFETY & EMC	VIBRATION SAFETY STANDARDS Note.8	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes UL8750(type"HL"), CSA C22.2 No. 250.13-12, EN BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384,								
	WITHSTAND VOLTAGE	EAC TP TC 004,GB19510.1,GB19510.14, IP67 approved; Design refer to BS EN/EN60335-1 I/P-O/P:3.75KVAC								
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH								
	EMC EMISSION Note.8	Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@load ≧ 60%) ; BS EN/EN61000-3-3; GB/T 17743, GB17625.1, EAC TP TC 020								
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level (surge immunity Line-Line 2KV); EAC TP TC 020								
	MTBF	2632.6K hrs r	nin. Telcord	ia SR-332 (Bel	lcore); 295.	2Khrs min. I	MIL-HDBK-217	F (25℃)		
OTHERS	DIMENSION	191*63*37.5n			.,,			/		
	PACKING		s/15.6Kg/0.87	CUFT						
	1. All parameters NOT special		•		it rated curror	nt and 25℃ of	amhient temp	erature		
NOTE	 Please refer to "DRIVING M Ripple & noise are measured Tolerance : includes set up to De-rating may be needed un Length of set up time is mea The driver is considered as complete installation, the fin (as available on https://www This series meets the typica Please refer to the warranty The ambient temperature of For any application note ar https://www.meanwell.com 	I at 20MHz of the laterance, line re- nder low input assured at first of a equipment r aneanwell.com I life expectance statement on derating of 3.5°	andwidth by u gulation and lc voltages. Plea cold start. Turr hat will be ope nanufacturers n//Upload/PDF y of >50,000 MEAN WELL ¹ ℃/1000m with of function ins	sing a 12" twist and regulation. Ise refer to "ST ing ON/OFF the arated in comb must re-qualify /EMI_statemen hours of opera s website at ht fanless model	ATIC CHARAG ne driver may l ination with fin EMC Directiv t_en.pdf) tion when Tcas tp://www.mear s and of 5°C/1	CTERISTIC" se lead to increas al equipment. s e on the comp se, particularly well.com 000m with fan	ections for deta e of the set up Since EMC pe lete installatior (c) point (or T models for op	ails. time. formance will a again. MP, per DLC), erating altitude	be affected by is about $75^\circ\!\!\mathbb{C}$	or less.



120W Constant Voltage + Constant Current LED Driver


NPF-120 series

BLOCK DIAGRAM PFC fosc : 50~120KHz PWM fosc : 60~130KHz EMI FILTER RECTIFIERS POWER 3 PFC -0 Vo+ I/P C & & SWITCHING CIRCUIT 3 -0 Vo-RECTIFIERS FILTER 0.L.P. ¦}≵≨ DETECTION O.T.P. 0.L.P. PWM & PFC CIRCUIT CONTROL 0.V.P. ■ DRIVING METHODS OF LED MODULE ※ This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs. In the constant current region, the highest voltage at the output of the driver 100 depends on the configuration of the end systems. Should there be any compatibility issues, please contact MEAN WELL. (B) Vo(%) (A) Constant Constant Current area Voltage area 60 (min.) (C) Hiccup Protection 100 50 lo(%) Typical output current normalized by rated current (%)



120W Constant Voltage + Constant Current LED Driver


NPF-120 series

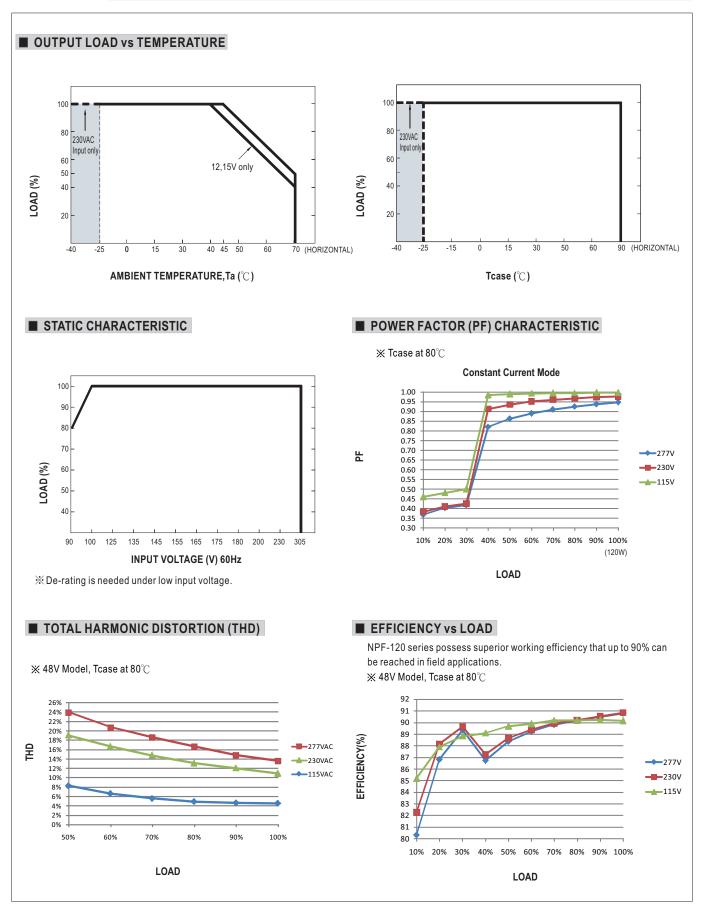



NPF-120 series

LIFE TIME

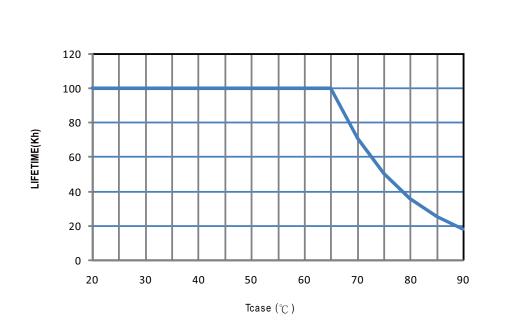



120W Constant Voltage + Constant Current LED Driver

NPF-120 series

