

## STRADELLA-8-HB-S

~25° spot beam for industrial applications

### SPECIFICATION:

Dimensions	49.5 x 49.5
Height	7.5 mm
Fastening	screw
ROHS compliant	yes ⓘ




### MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
STRADELLA-8-HB-S	Multi-lens	PMMA	clear		

### ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C15183_STRADELLA-8-HB-S » Box size:		160	160	5.0


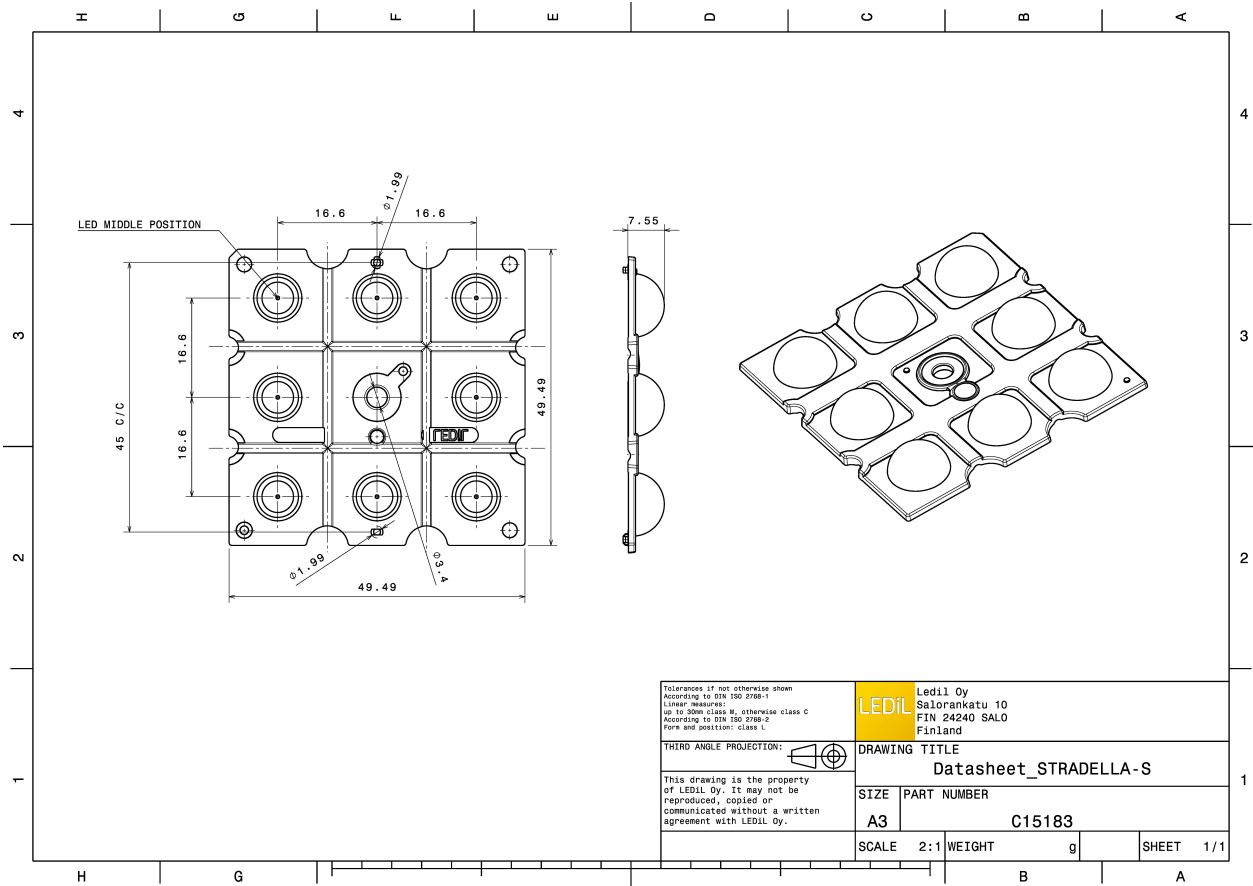


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

#### OPTICAL RESULTS (MEASURED):




**LED** QUICK FLUX XT 2x8 xxx STRDLL G5  
**FWHM / FWTM** 31.0° / 81.0°  
**Efficiency** 93 %  
**Peak intensity** 1.5 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

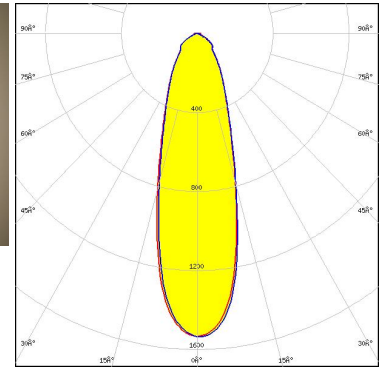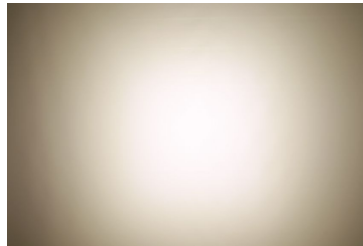

Light distribution files




**LED** J Series 3030  
**FWHM / FWTM** 28.0° / 76.0°  
**Efficiency** 96 %  
**Peak intensity** 1.8 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

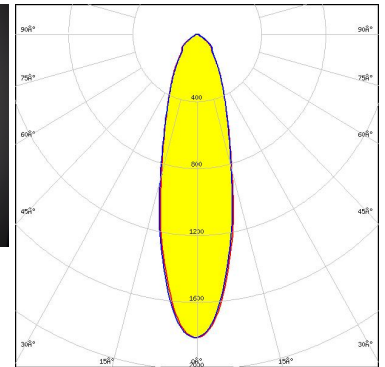

Light distribution files



**LED** XP-G3  
**FWHM / FWTM** 34.0° / 93.0°  
**Efficiency** 94 %  
**Peak intensity** 1.3 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

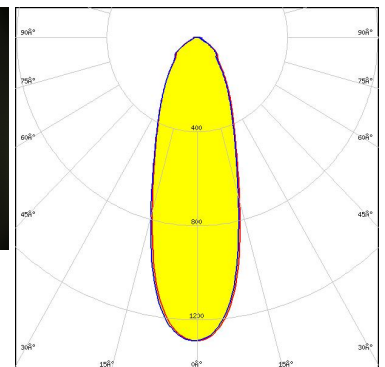


Light distribution files

#### OPTICAL RESULTS (MEASURED):





LED XT-E  
 FWHM / FWTM 28.0° / 83.0°  
 Efficiency 94 %  
 Peak intensity 1.6 cd/m  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

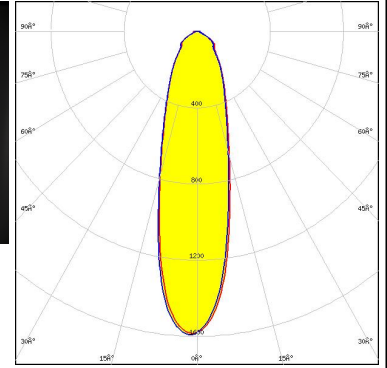

Light distribution files





LED LUXEON 3030 2D (Round LES)  
 FWHM / FWTM 23.0° / 66.0°  
 Efficiency 94 %  
 Peak intensity 2.3 cd/m  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

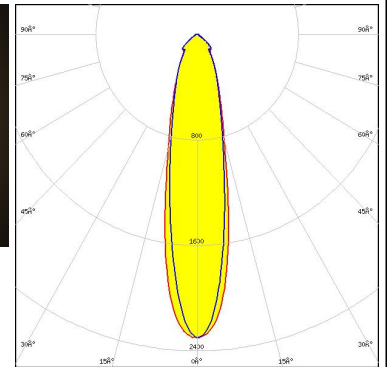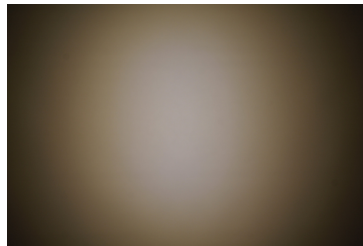

Light distribution files



LED LUXEON 3030 2D (Round LES)  
 FWHM / FWTM 23.0° / 64.0°  
 Efficiency 88 %  
 Peak intensity 2.3 cd/m  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

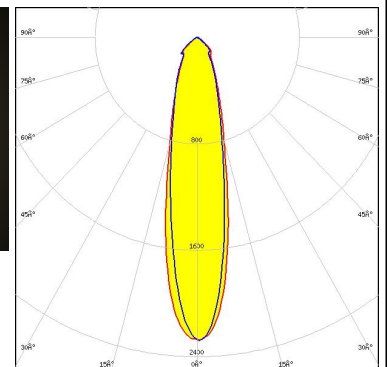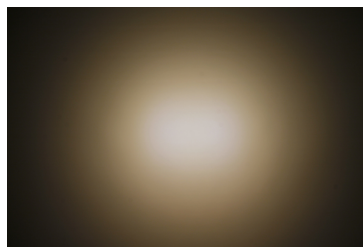


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (MEASURED):




**LED** LUXEON 3535L  
**FWHM / FWTM** 24.0° / 66.0°  
**Efficiency** 94 %  
**Peak intensity** 2.3 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

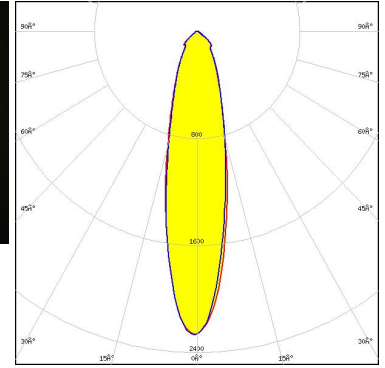

Light distribution files





**LED** LUXEON TX  
**FWHM / FWTM** 29.0° / 75.0°  
**Efficiency** 94 %  
**Peak intensity** 1.9 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

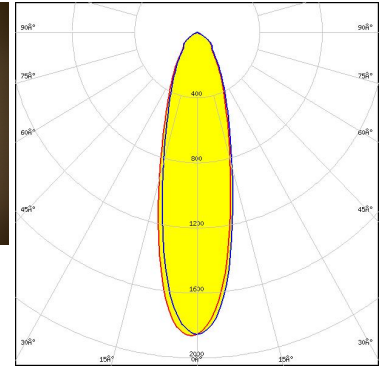

Light distribution files



**LED** LUXEON V2  
**FWHM / FWTM** 31.0° / 81.0°  
**Efficiency** 94 %  
**Peak intensity** 1.6 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

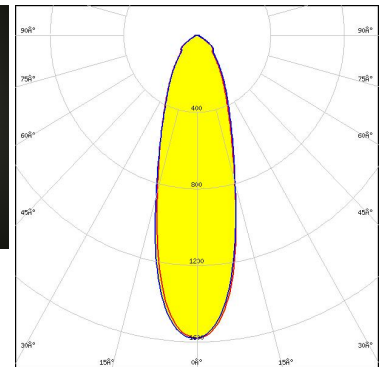
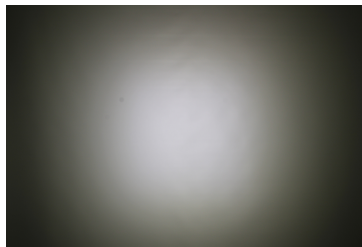


Light distribution files

#### OPTICAL RESULTS (MEASURED):





LED NVSW219D  
 FWHM / FWTM 33.0° / 80.0°  
 Efficiency 94 %  
 Peak intensity 1.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

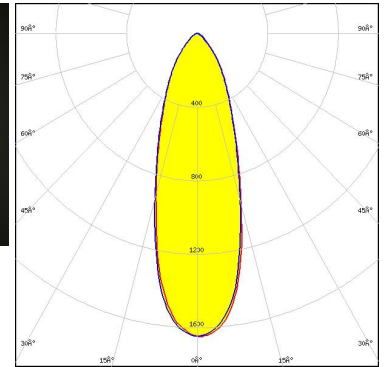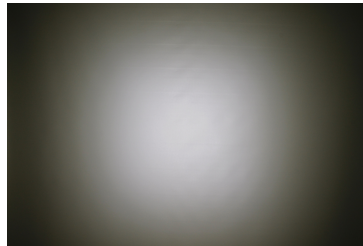

Light distribution files





LED Duris S5 (2 chip)  
 FWHM / FWTM 23.0° / 64.0°  
 Efficiency 93 %  
 Peak intensity 2.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

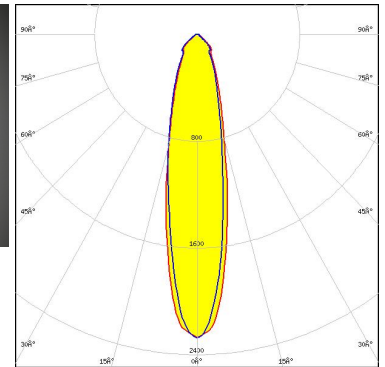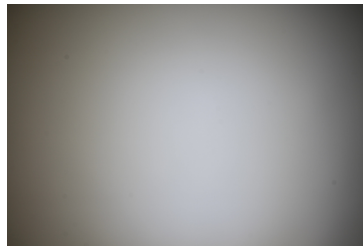

Light distribution files




LED OSLOM Square CSSRM2/CSSRM3  
 FWHM / FWTM 27.0° / 78.0°  
 Efficiency 94 %  
 Peak intensity 1.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

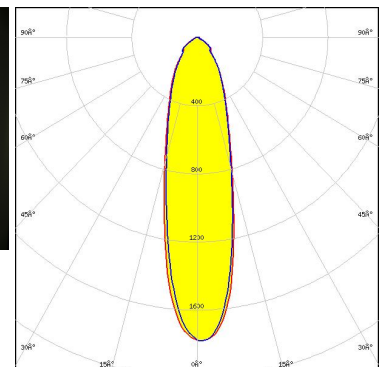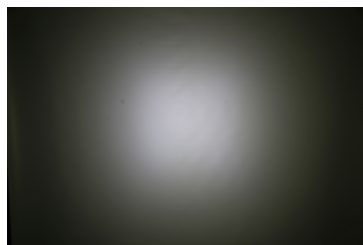

Light distribution files

#### OPTICAL RESULTS (MEASURED):

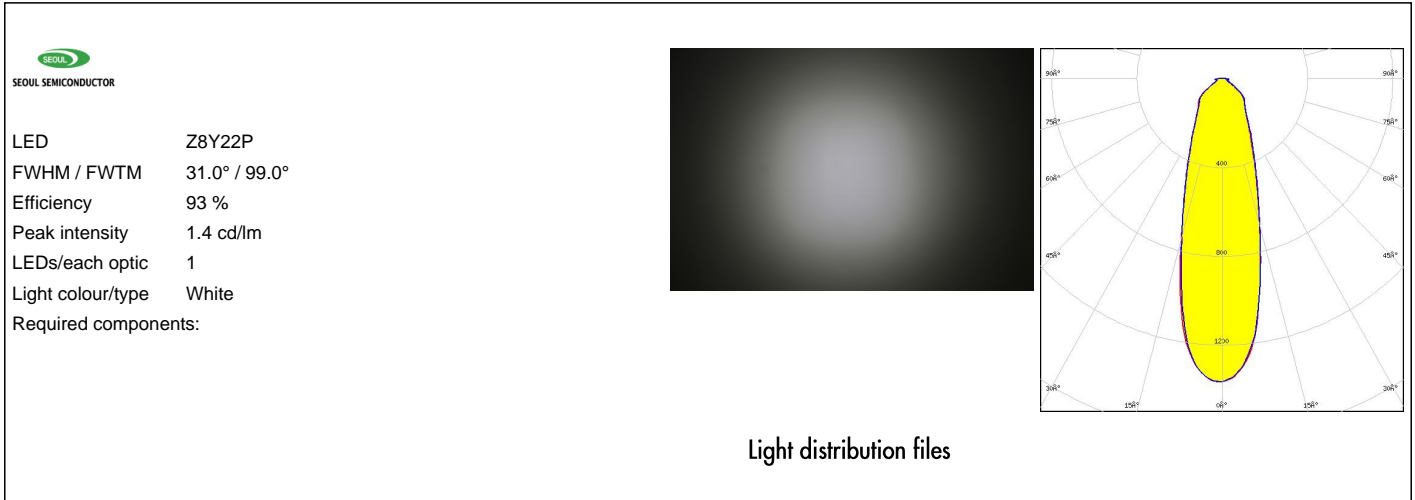




#### OPTICAL RESULTS (SIMULATED):




LED XHP35.2 HI  
FWHM / FWTM 40.0° / 94.0°  
Efficiency 93 %  
Peak intensity 1.2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

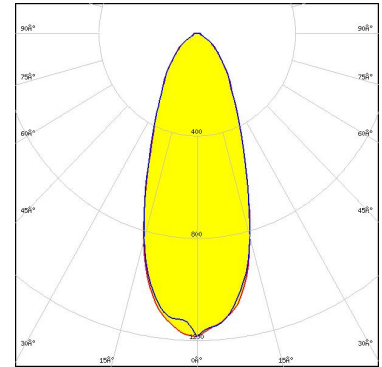

Light distribution files




LED XP-P  
FWHM / FWTM 20.0° / 62.0°  
Efficiency 95 %  
Peak intensity 2.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

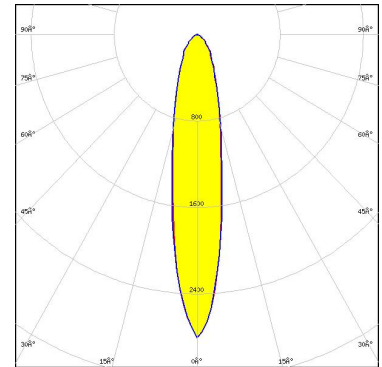

Light distribution files



LED LUXEON 3535L HE  
FWHM / FWTM 20.0° / 65.0°  
Efficiency 90 %  
Peak intensity 2.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

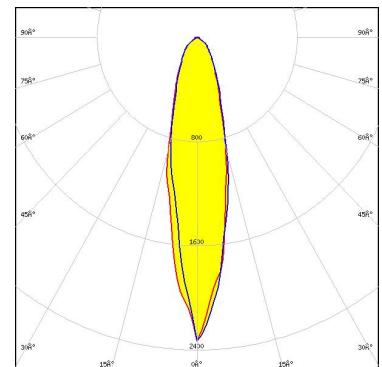


Light distribution files



#### OPTICAL RESULTS (SIMULATED):





LED LUXEON HR30  
FWHM / FWTM 26.0° / 72.0°  
Efficiency 91 %  
Peak intensity 2.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

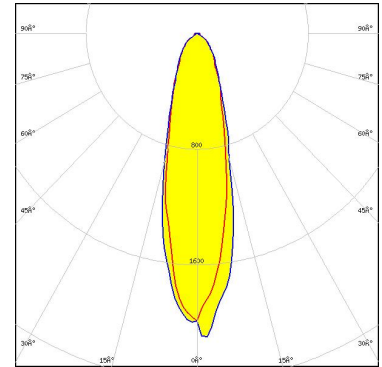

Light distribution files




LED SST-12 Gen2  
FWHM / FWTM 26.0° / 72.0°  
Efficiency 95 %  
Peak intensity 2.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

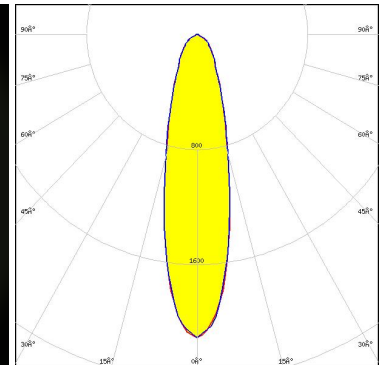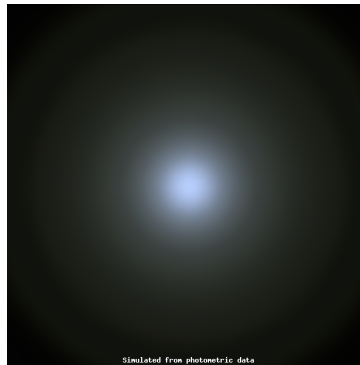

Light distribution files



LED NCSxE17A  
FWHM / FWTM 19.0° / 59.0°  
Efficiency 94 %  
Peak intensity 2.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

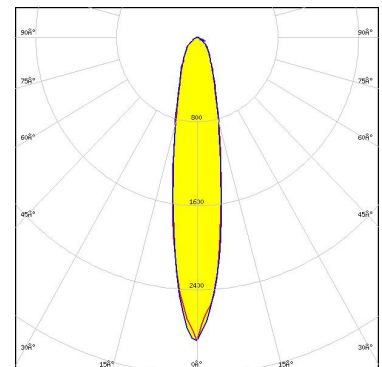


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED NF2x757G  
FWHM / FWTM 29.0° / 76.0°  
Efficiency 94 %  
Peak intensity 2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

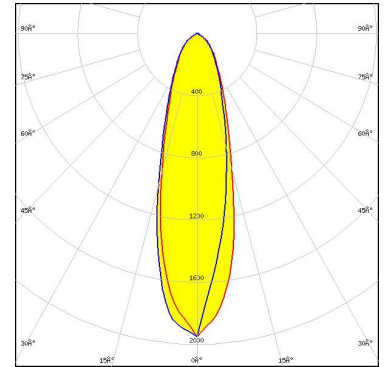

Light distribution files




LED NVSW219D  
FWHM / FWTM 34.0° / 78.0°  
Efficiency 93 %  
Peak intensity 1.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

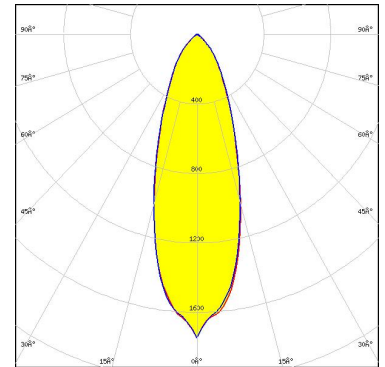

Light distribution files






LED NVSxE21A  
FWHM / FWTM 22.0° / 67.0°  
Efficiency 94 %  
Peak intensity 2.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

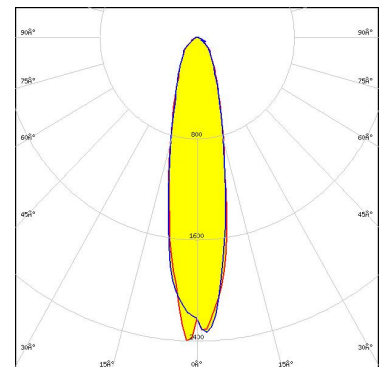

Light distribution files


#### OPTICAL RESULTS (SIMULATED):

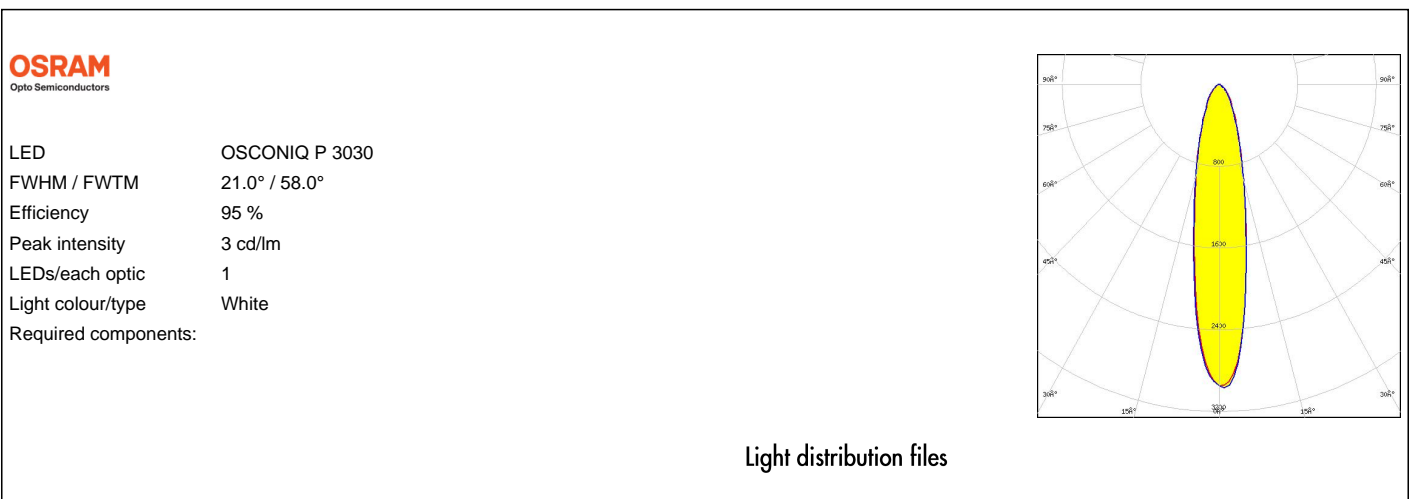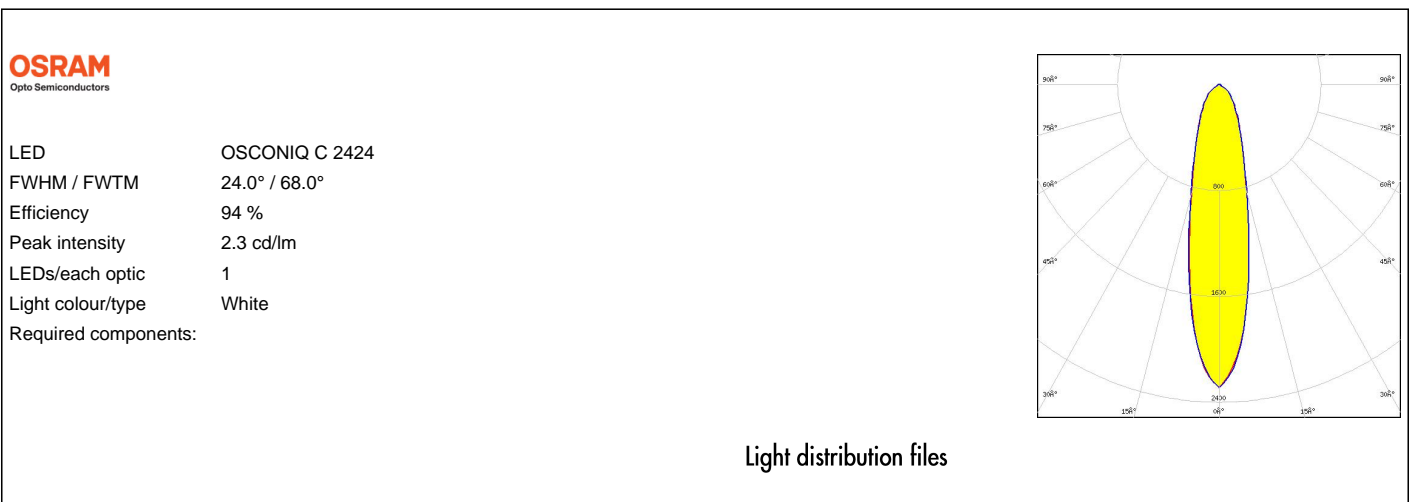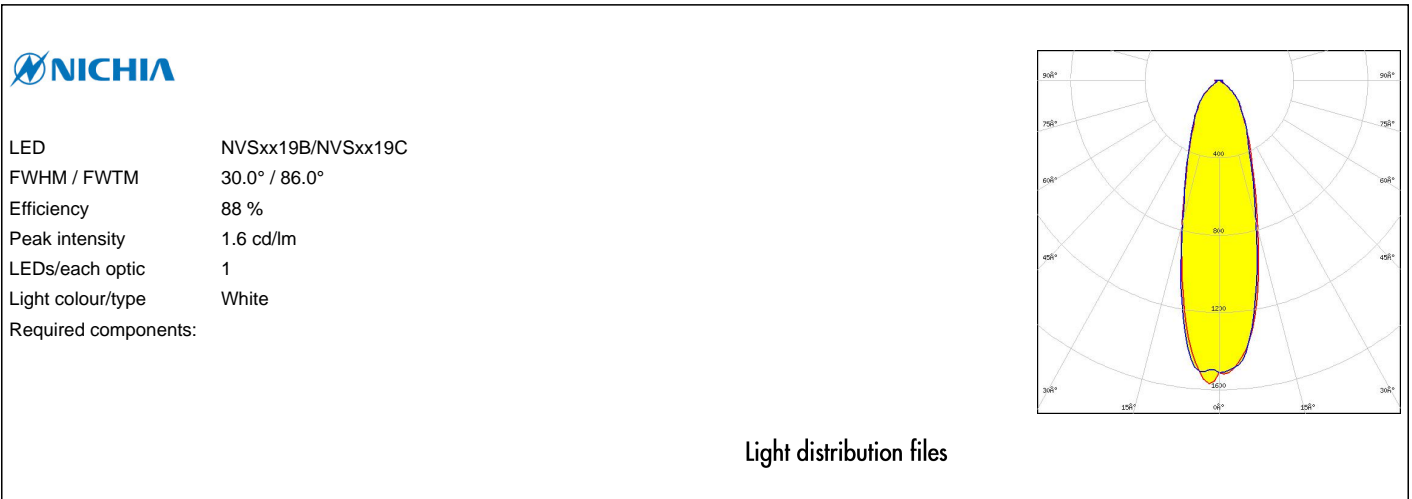

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSCONIQ P 3737 (2W version)  
 FWHM / FWTM 28.0° / 76.0°  
 Efficiency 94 %  
 Peak intensity 2 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

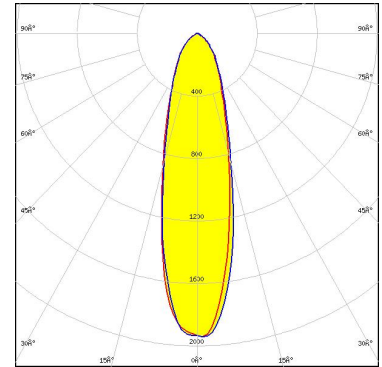

Light distribution files

**SAMSUNG**


LED LH181B  
 FWHM / FWTM 27.0° / 75.0°  
 Efficiency 94 %  
 Peak intensity 2 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

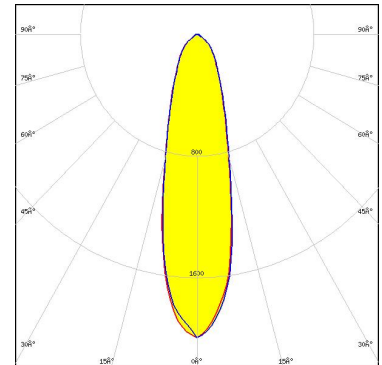

Light distribution files

**SAMSUNG**

LED LH351B  
 FWHM / FWTM 33.0° / 82.0°  
 Efficiency 88 %  
 Peak intensity 1.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

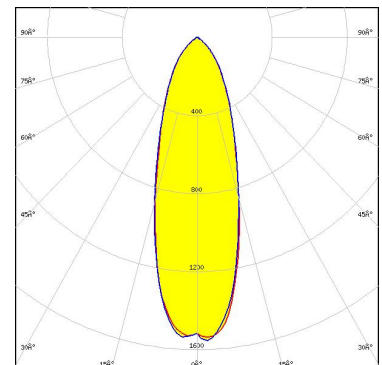


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):

### SAMSUNG


LED LH351B  
FWHM / FWTM 33.0° / 83.0°  
Efficiency 94 %  
Peak intensity 1.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

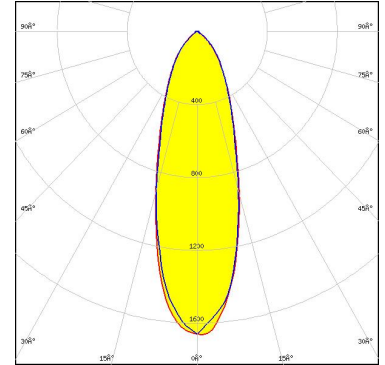

Light distribution files

### SAMSUNG


LED LH351C  
FWHM / FWTM 35.0° / 86.0°  
Efficiency 93 %  
Peak intensity 1.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

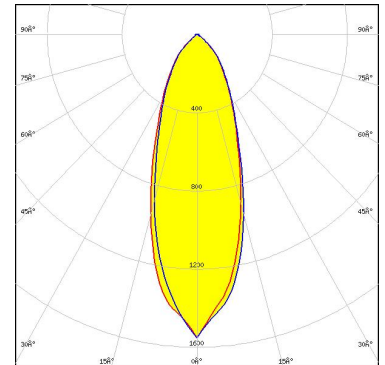

Light distribution files




### SAMSUNG

LED LH351D  
FWHM / FWTM 44.0° / 93.0°  
Efficiency 93 %  
Peak intensity 1.2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

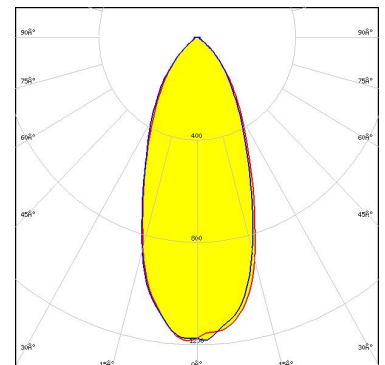


Light distribution files

#### OPTICAL RESULTS (SIMULATED):

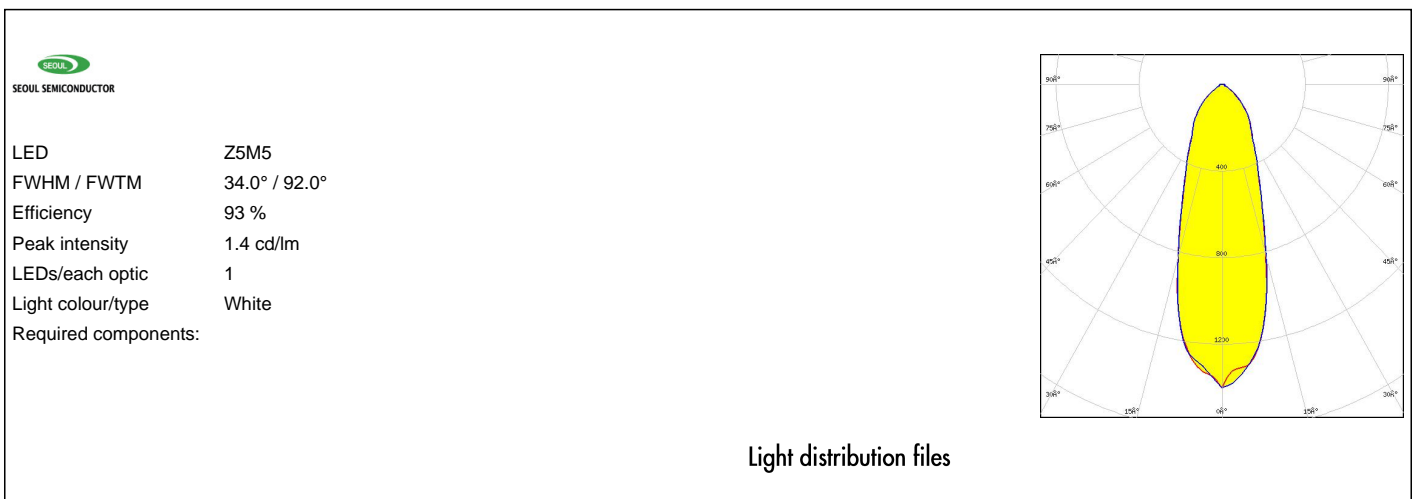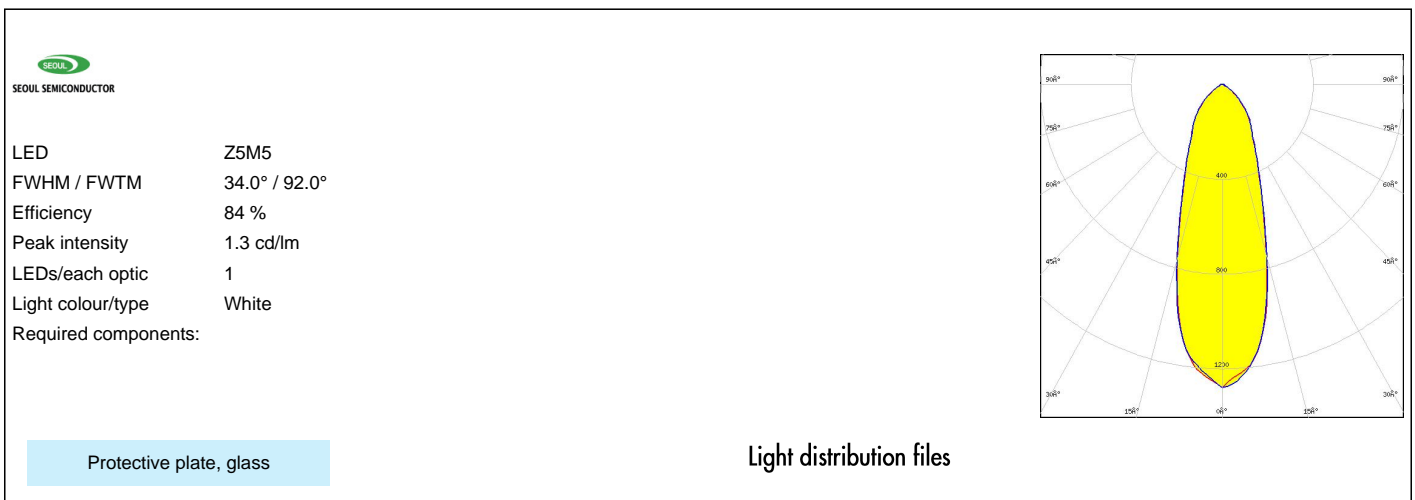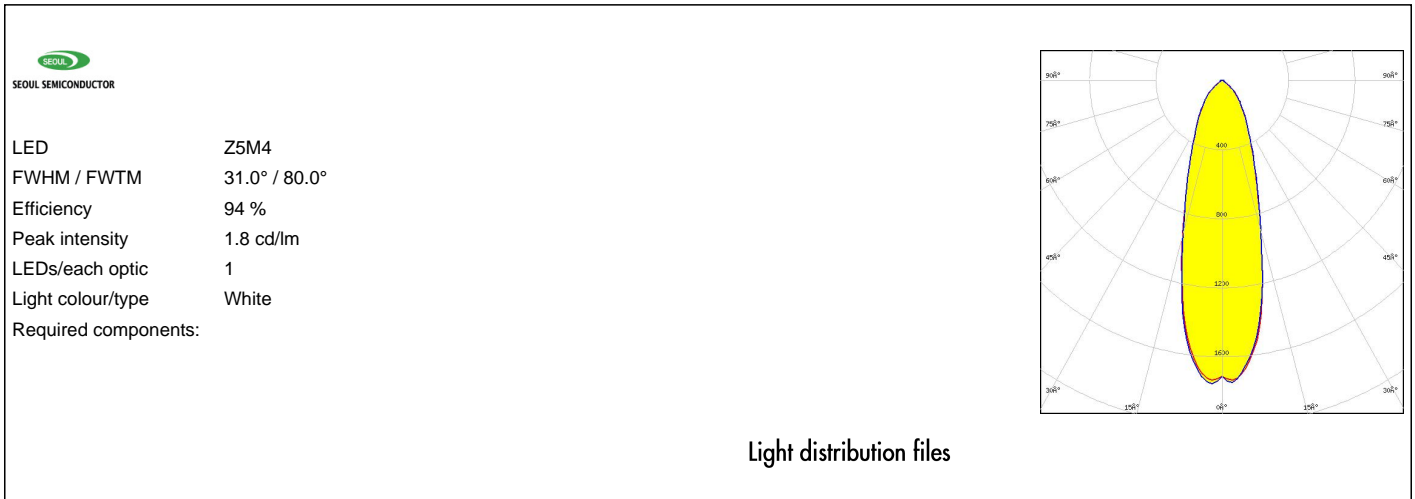

#### OPTICAL RESULTS (SIMULATED):

 SEOL SEMICONDUCTOR	
LED	Z8Y19
FWHM / FWTM	23.0° / 81.0°
Efficiency	92 %
Peak intensity	1.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files



#### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

#### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Poznan, Poland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)