PRODUCT C15967_STRADA-2X2CSP-T2

STRADA-2X2CSP-T2

IESNA Type II (medium) beam applicable for European P-class standard pedestrian lighting and M-class roads

SPECIFICATION:

Dimensions 50.0 x 50.0 mm 7.7 mm Height glue, pin, screw Fastening yes 🕕 ROHS compliant



MPQ

Box weight (kg)

1/8

MATERIALS:

Component **Type** Material Colour Finish Length (mm) STRADA-2X2CSP-T2 Multi-lens **PMMA** clear


ORDERING INFORMATION:

Component Qty in box MOQ

C15967_STRADA-2X2CSP-T2 800 160 160 5.5 » Box size: 480 x 280 x 300 mm



PRODUCT DATASHEET C15967_STRADA-2X2CSP-T2

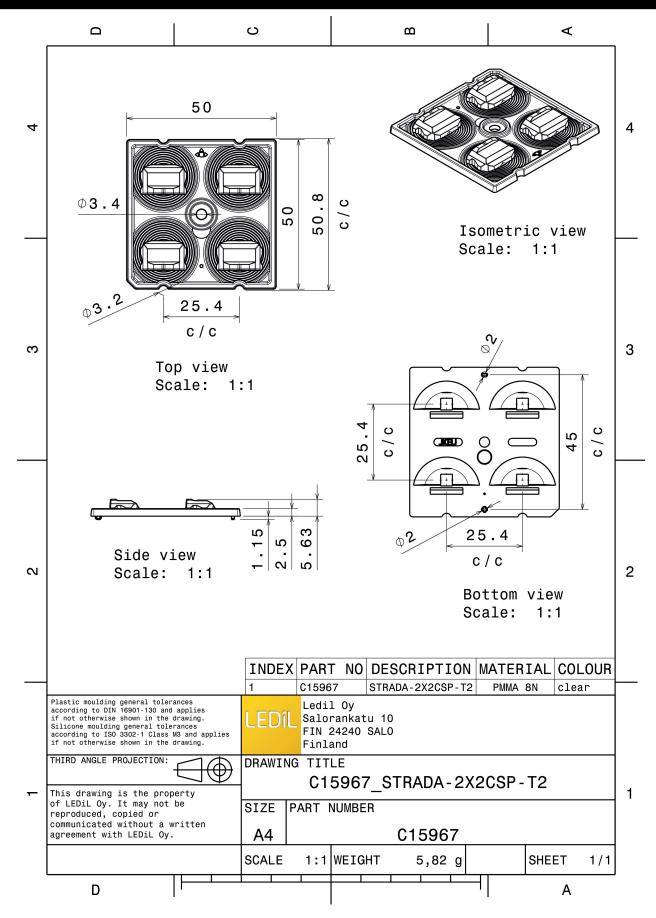


See also our general installation guide: www.ledil.com/installation_guide



OPTICAL RESULTS (MEASURED):



LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:




Protective plate, glass

Light distribution files



LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

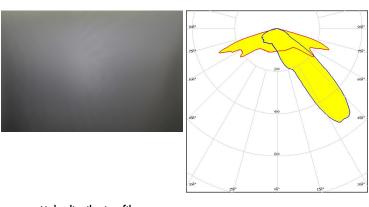


Light distribution files



LED SMJQ-D36W12Mx
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm


Peak intensity 0.7 cd.
LEDs/each optic 1
Light colour/type White
Required components:




Light distribution files



OPTICAL RESULTS (MEASURED):

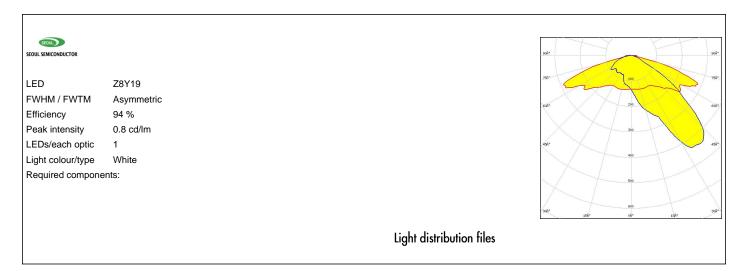



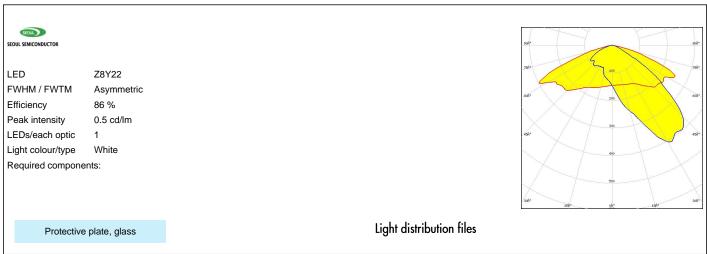




OPTICAL RESULTS (SIMULATED):



LED LUXEON HL2Z
FWHM / FWTM Asymmetric
Efficiency 79 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

Protective plate, glass




Light distribution files

MATERIAL SOLUTION

LED LUXEON HL2Z
FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:



Light distribution files

WNICHIA

LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 87 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

968* 968* 156* 668* 158* 268*

Light distribution files

Protective plate, glass

Published: 12/07/2019




OPTICAL RESULTS (SIMULATED):

SAMSUNG

LFD LH181A $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 94 % Peak intensity 0.6 cd/lm 1

LEDs/each optic Light colour/type White

Required components:




Light distribution files

SAMSUNG

LH181B LFD FWHM / FWTM Asymmetric Efficiency 94 % 0.7 cd/lm Peak intensity LEDs/each optic Light colour/type White

Required components:




Light distribution files



LED Z8Y15 FWHM / FWTM Asymmetric Efficiency 93 % Peak intensity 1.1 cd/lm LEDs/each optic Light colour/type White


Required components:



Light distribution files



OPTICAL RESULTS (SIMULATED):

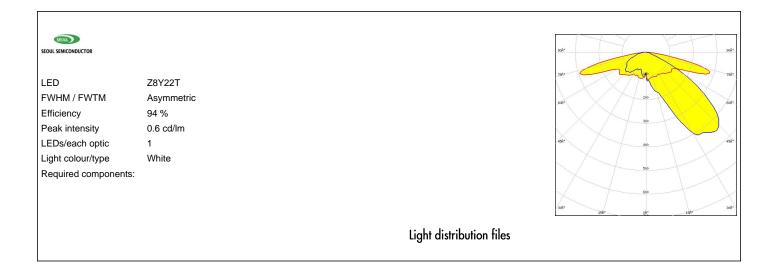

7/8



PRODUCT DATASHEET C15967_STRADA-2X2CSP-T2

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405, Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Poznan, Poland Hong Kong, China

Distribution Partners

8/8

www.ledil.com/ where_to_buy